


/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit

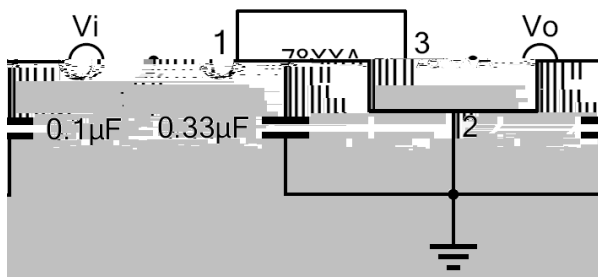

/ Pinning

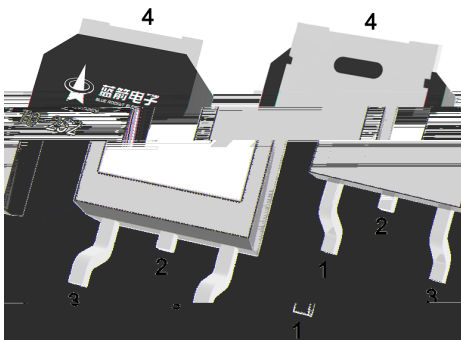

/ Marking


/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		
		~	
		~	


/ Electrical Characteristics(Vi=10V,Io=500mA,Tj=-30 ~125 ,unless otherwise specified

		≤				
	Δ	℃				
	Δ					
		℃				
	Δ					
	Δ Δ	℃				
		℃				μ
		℃				
						Ω
		℃				

/ Electrical Characteristic Curve

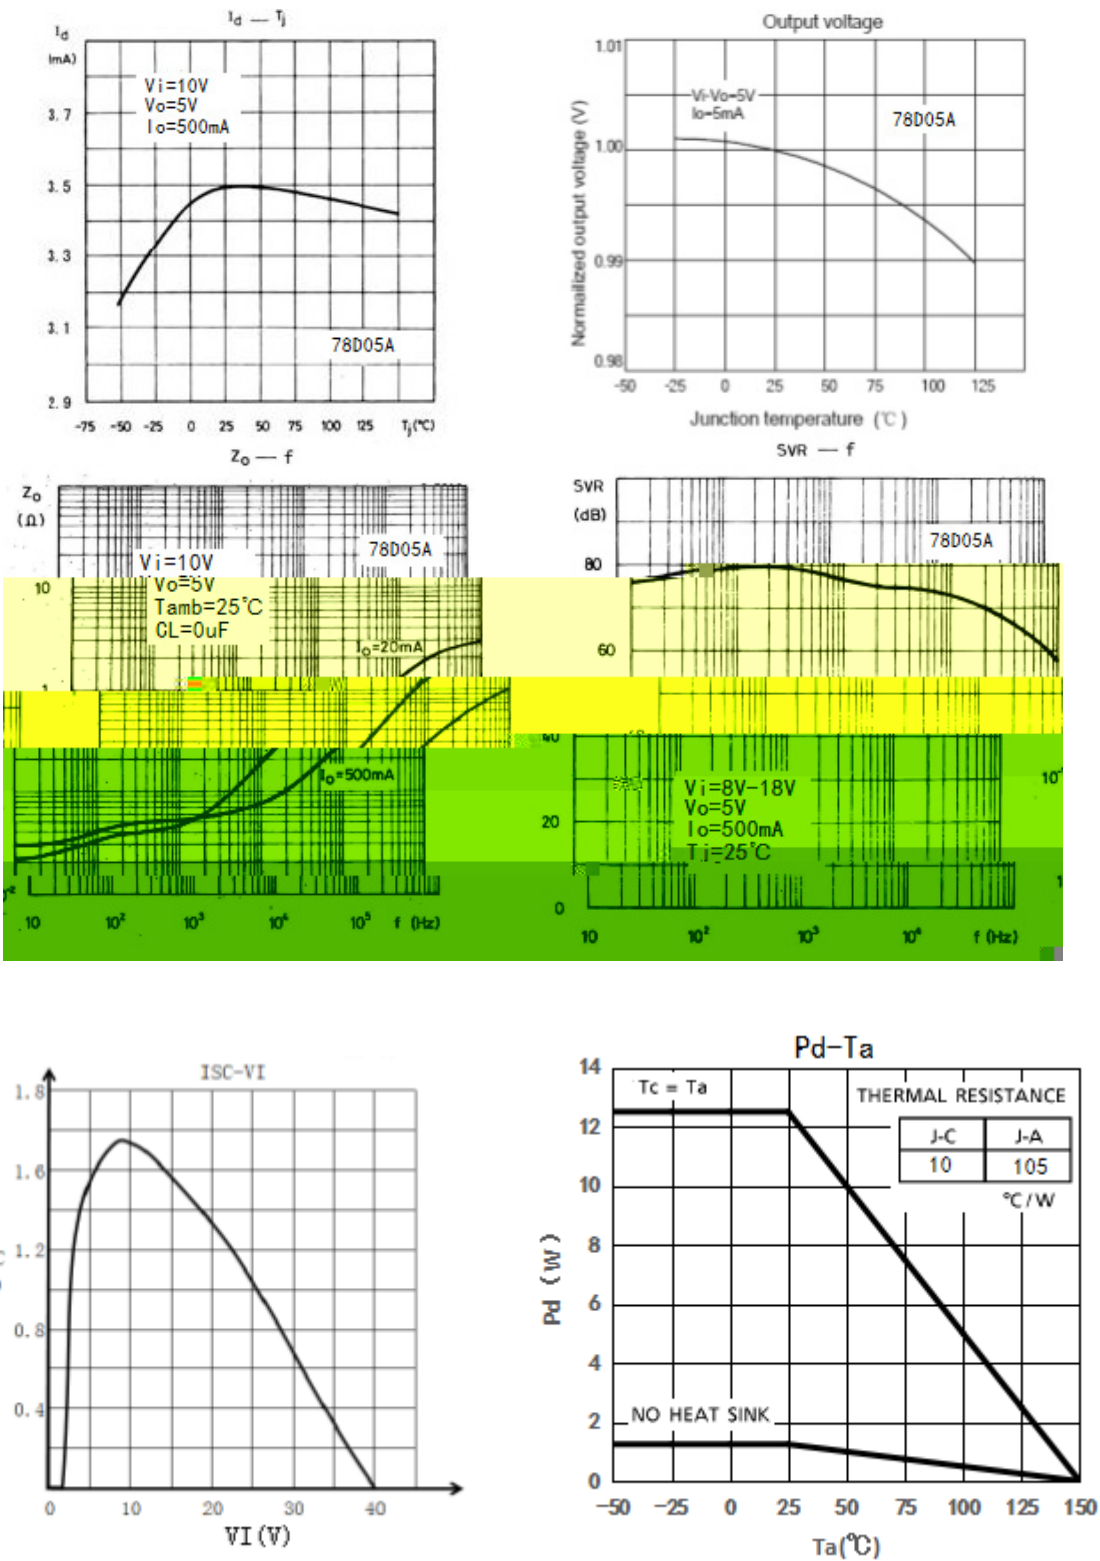


/ Package Dimensions

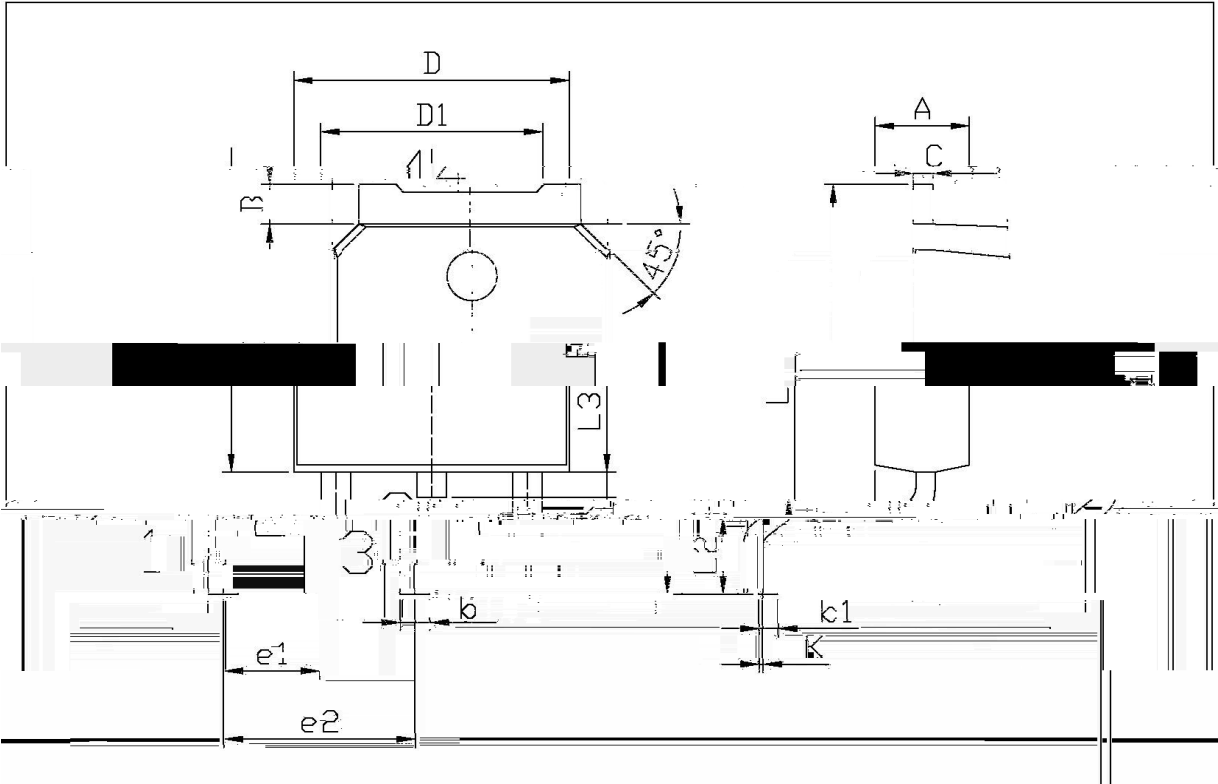


单位：mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	L3	0.70	0.80
B	0.95	1.25	e1	2.24	2.34
b	0.70	0.80	e2	4.73	4.83
b1	0.45	0.55	L1	9.85	10.35
C	0.15	0.25	L2	1.70	2.00
D	6.45	6.75	D	6.45	6.75
D1	5.10	5.50	D1	5.10	5.50

/ Marking Instructions

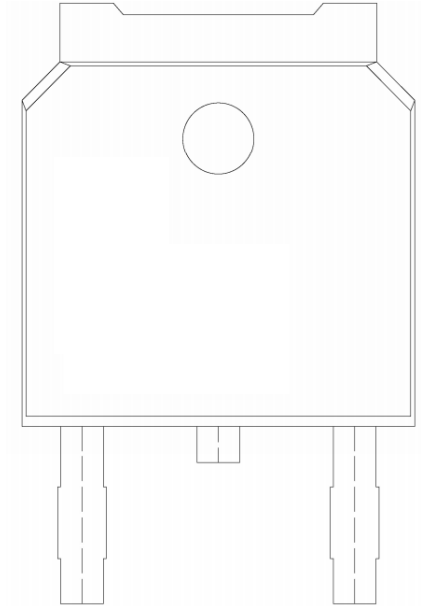

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

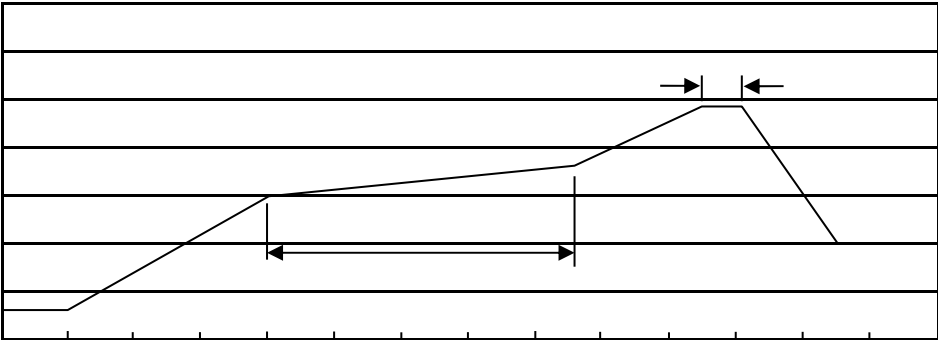

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel "	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

78D05A



DATA SHEET

/ Notices