

/ Descriptions

/ Features


μ Ω

/ Applications

/ Equivalent Circuit




/ Pinning

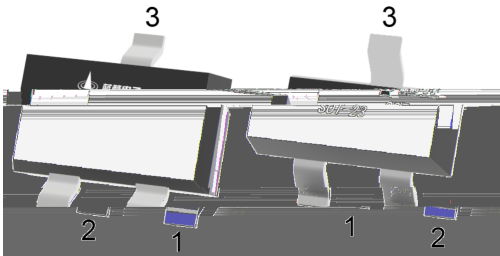

/ Marking

--	--



Electrical Characteristic Curve





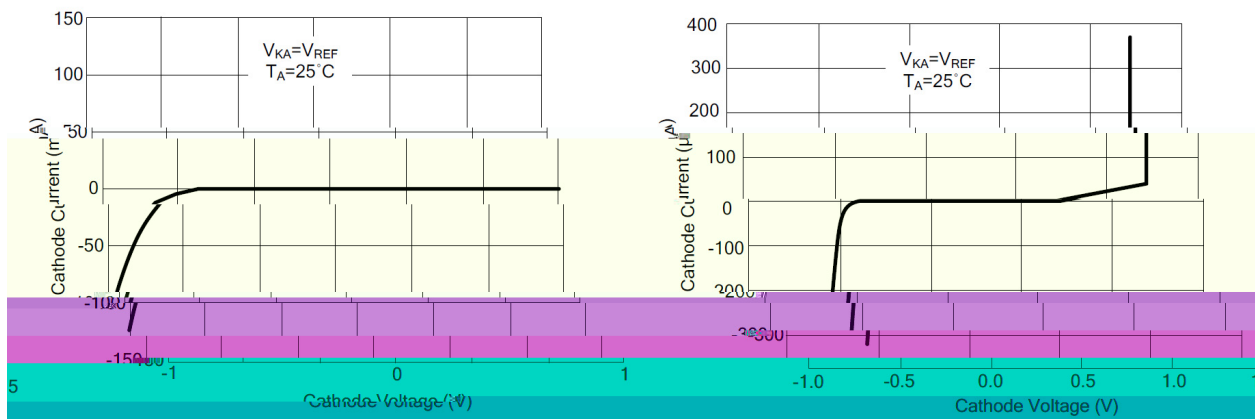



Figure 3 Cathode Current VS. Cathode Voltage

Figure 4 Current VS. Cathode Voltage


& Test circuits&Typical Application

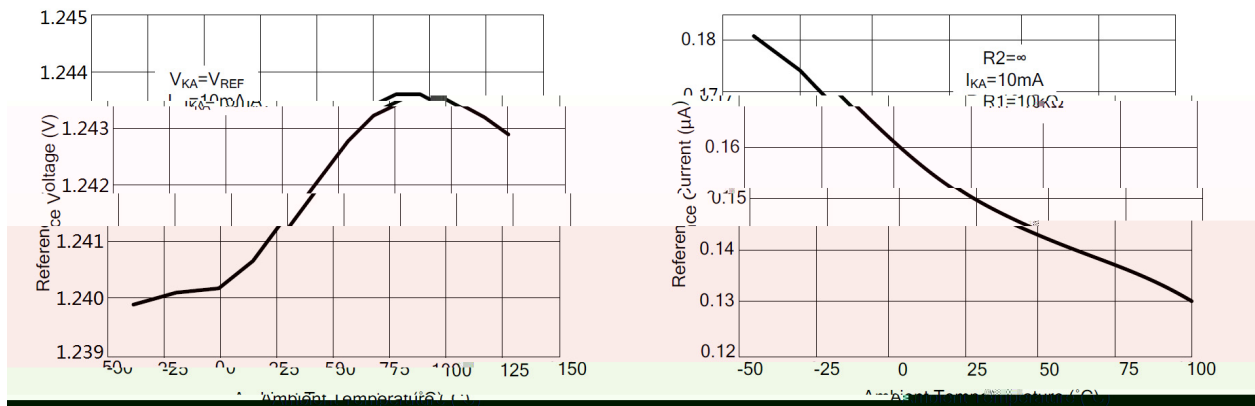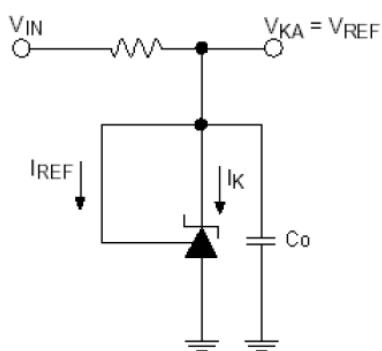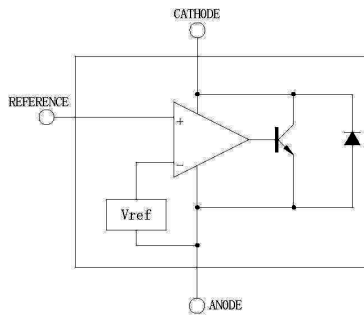




μ

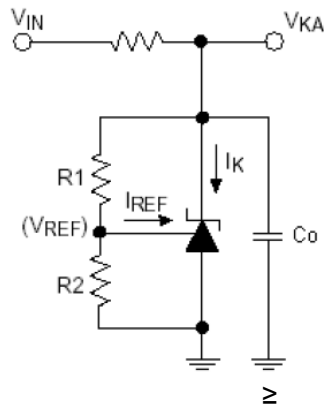

μ




≥

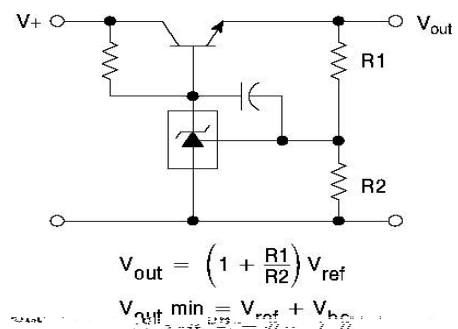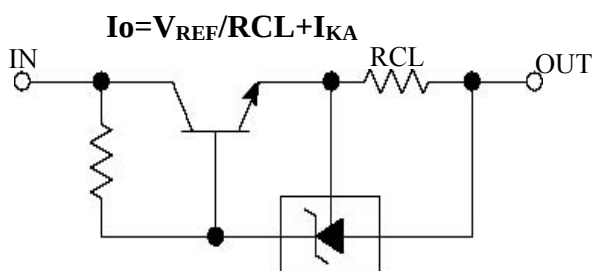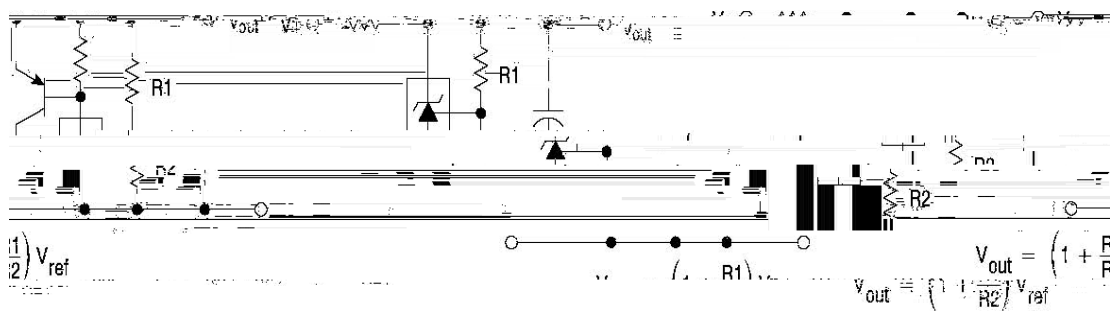


/ Package Dimensions

SOTI-23


单位: mm

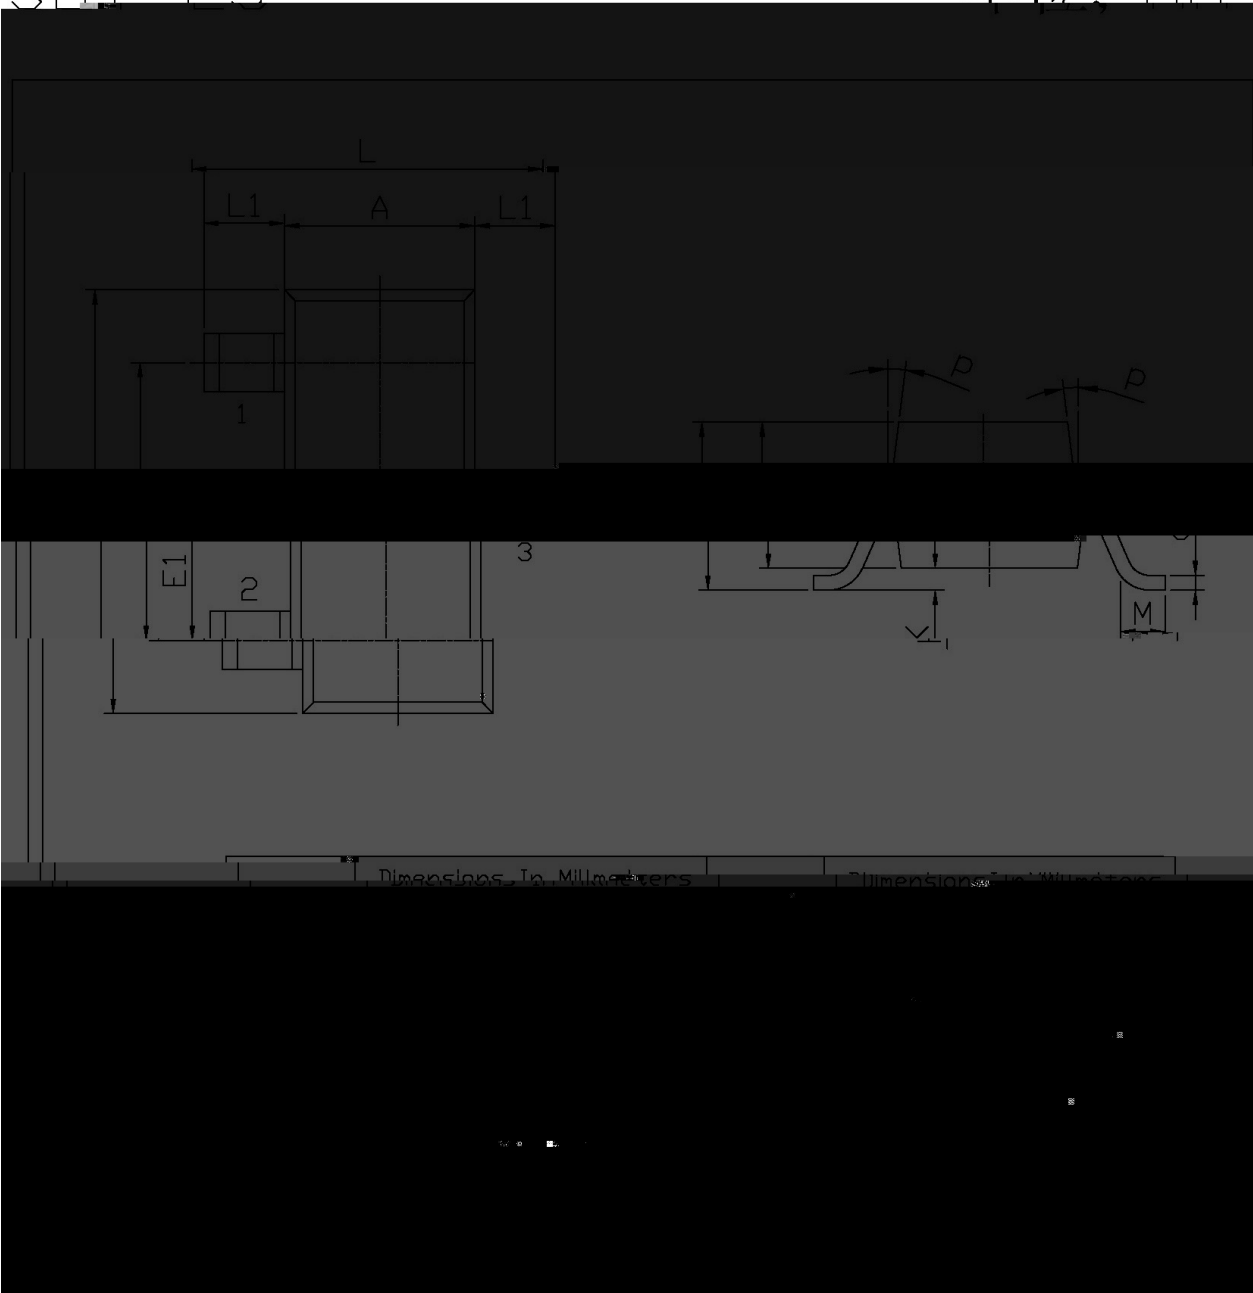

/ Marking Instructions

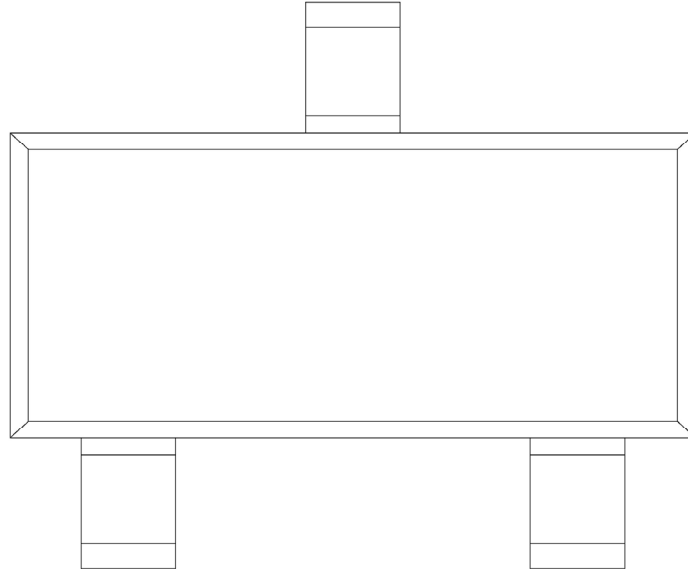

() /

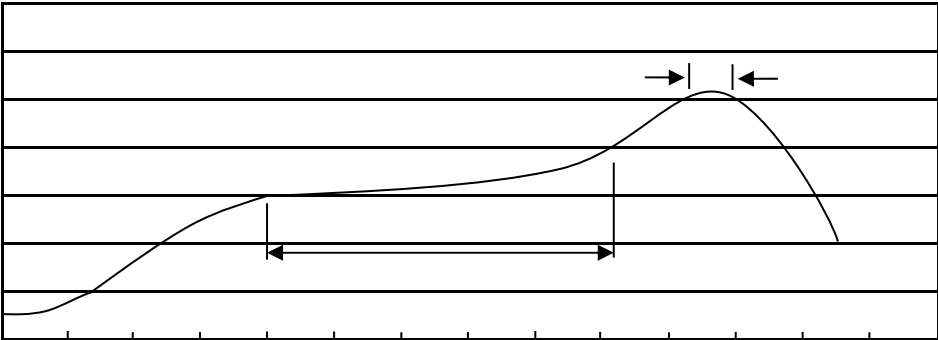

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices