



/ Descriptions**/ Features**

1. 1

/ Applications

DC/DC

/ Equivalent Circuit**/ Pinning****/ h_{FE} Classifications & Marking**


/ Absolute Maximum Ratings(Ta=25)

	℃		
	℃		
	℃		



/ Electrical Characteristics(Ta=25)

		℃				

/ Electrical Characteristic Curve

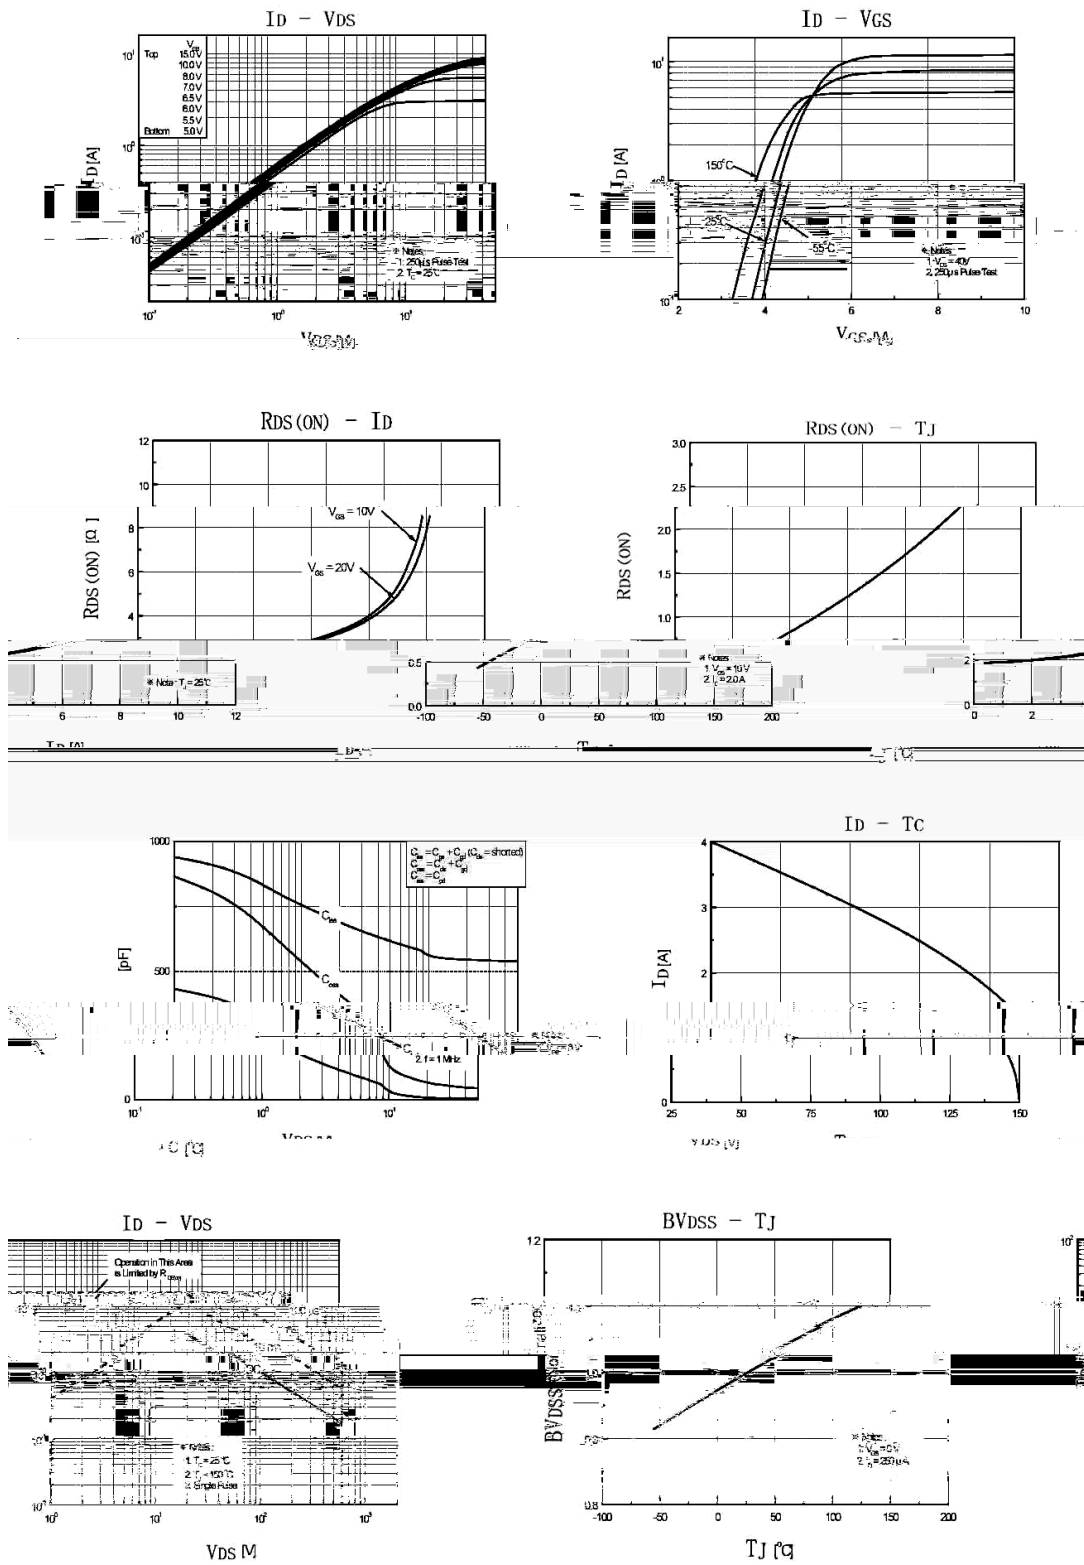


/ Package Dimensions

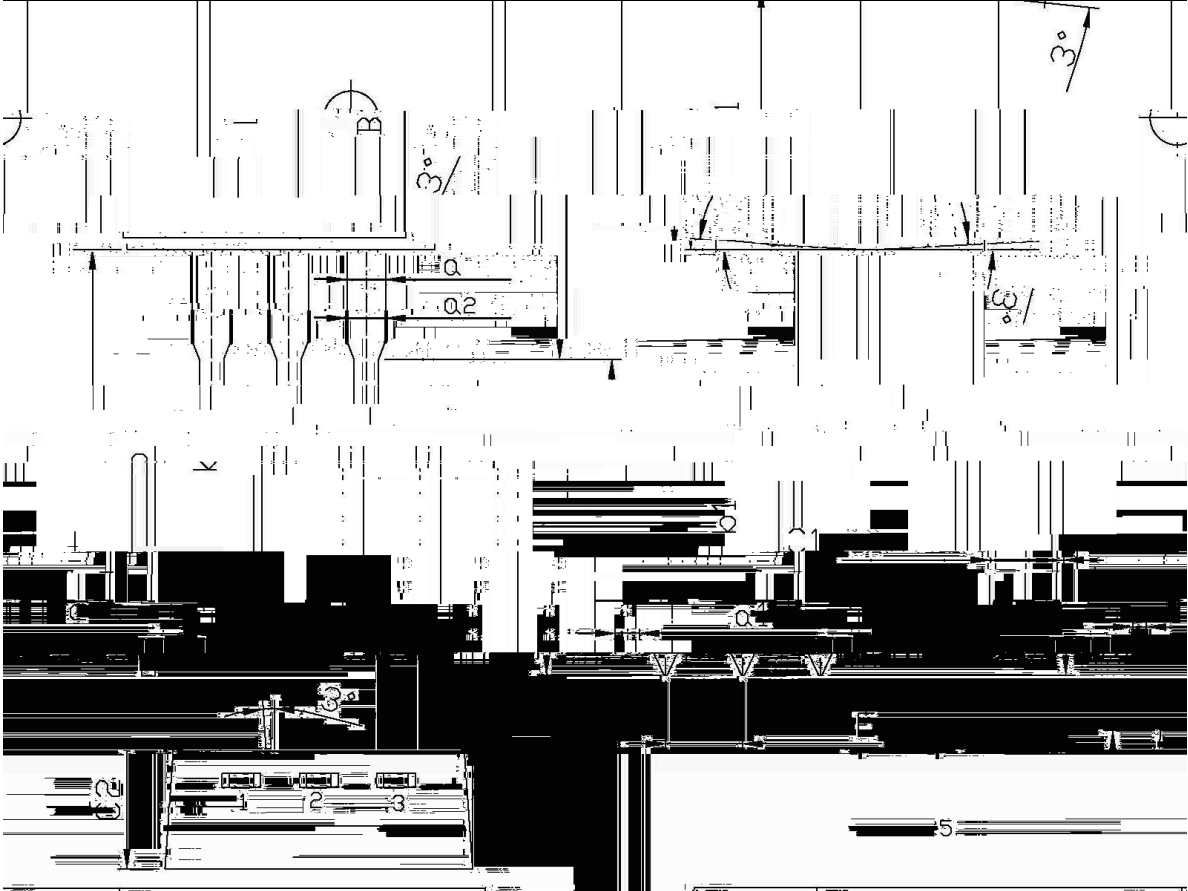


Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
	9.8	10.2		1.2	1.4
	2.56	3.30		5.63	6.35
	15.7	16.4		9.0	9.4
	12.6	13.6		2.2	2.6
	9.6	10.6		0.7	0.9
	0.4	0.5		1.25	1.45
	49.5	47.7			
				1.25	1.45

/ Marking Instructions

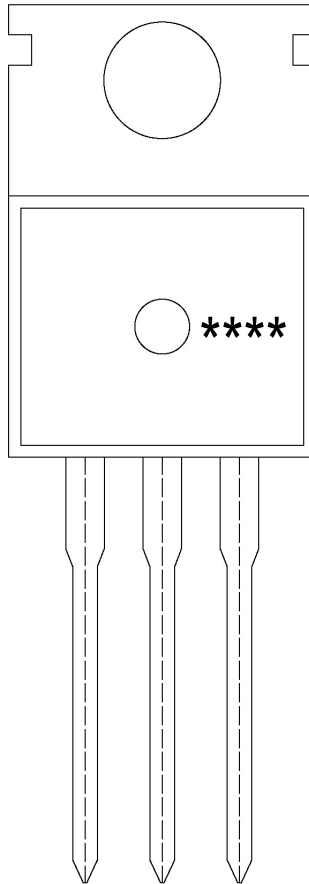

4N60

() / Temperature Profile for Dip Soldering(Pb-Free)

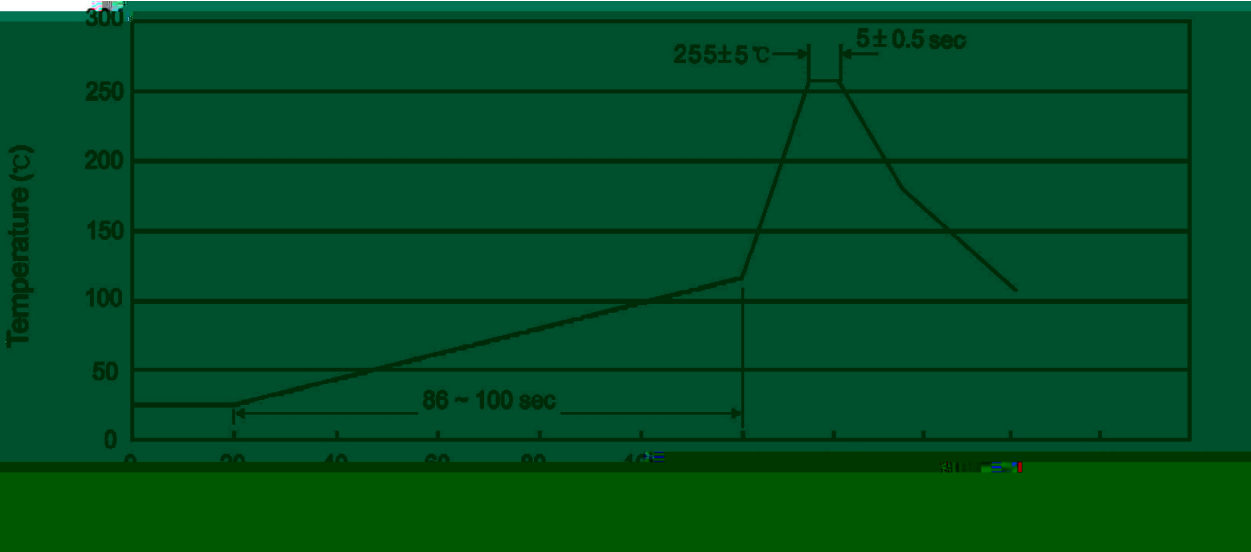

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.