




BRCO7533TAQ

/ Absolute Maximum Ratings(Ta=25)




/ Electrical Characteristics(Ta=25)

		≤ ≤				
		≤ ≤				
		≤ ≤				




/ Electrical Characteristic Curve

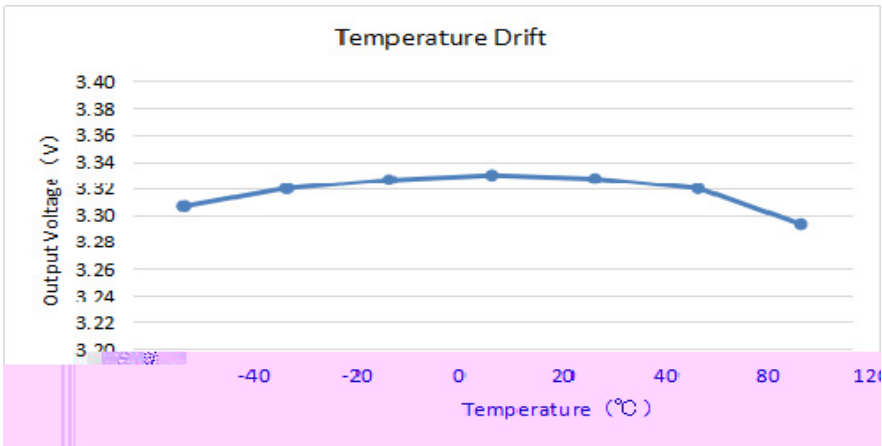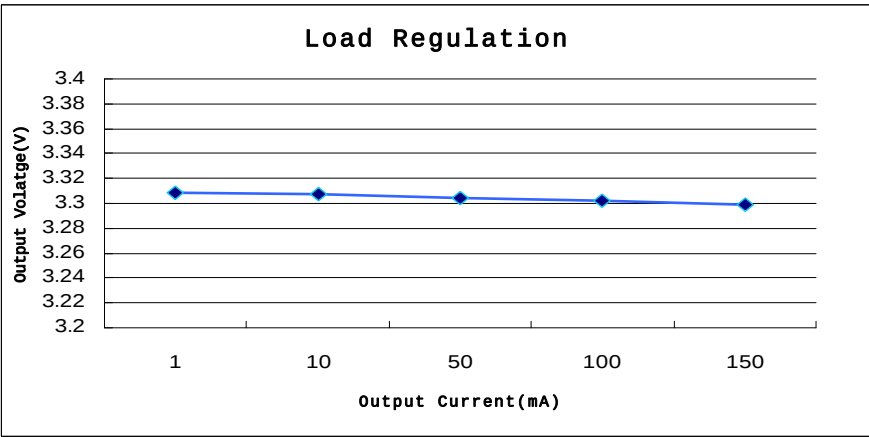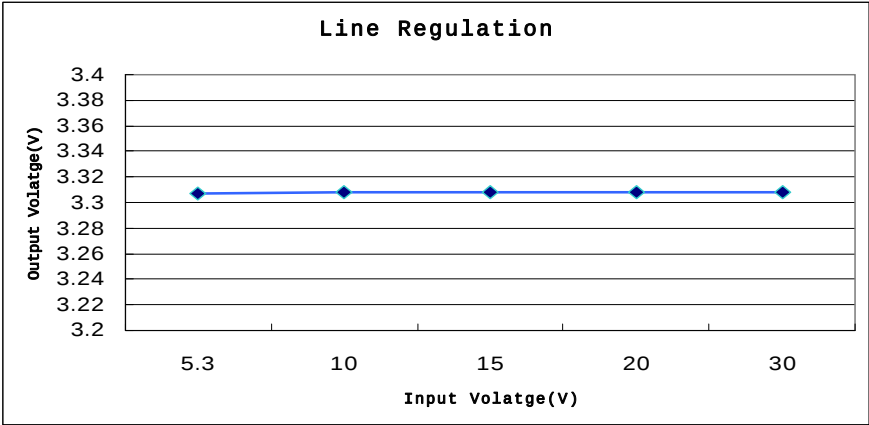

/ Typical Application Circuit

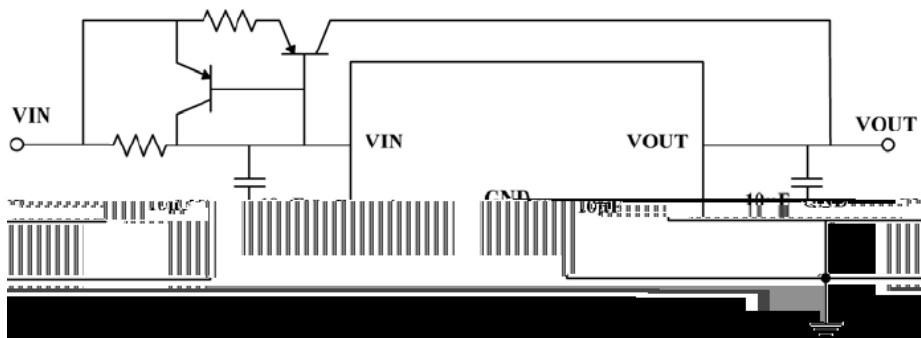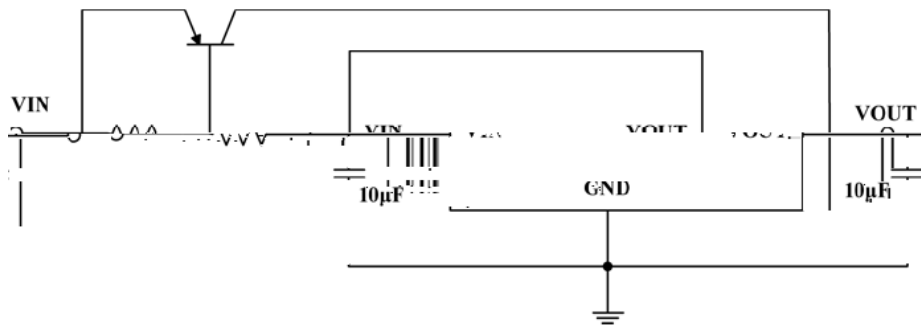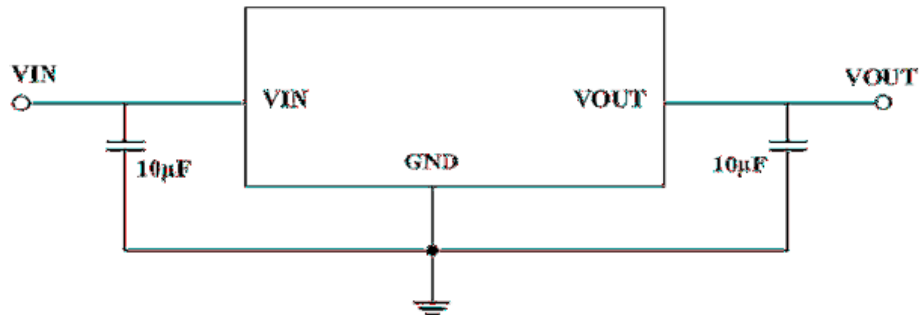


/ Typical Application Circuit

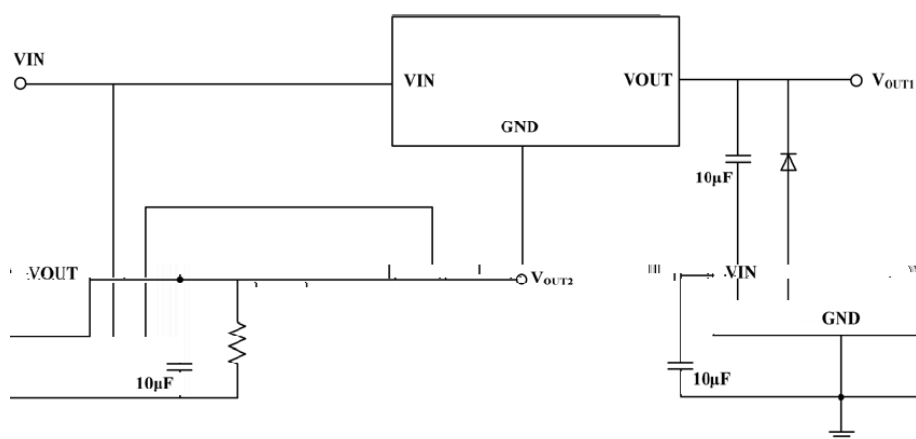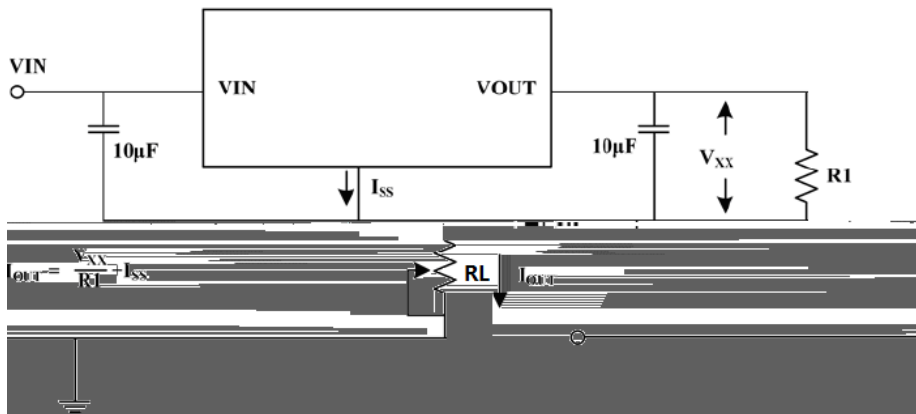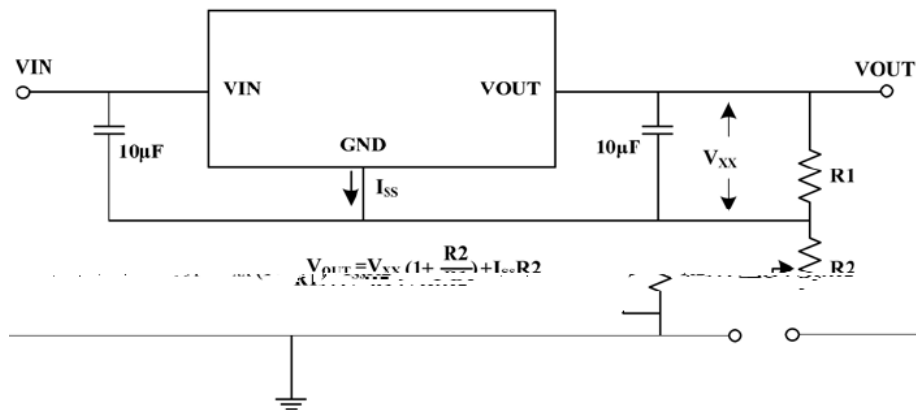


/ Package Dimensions

SMT-R9 单位: mm

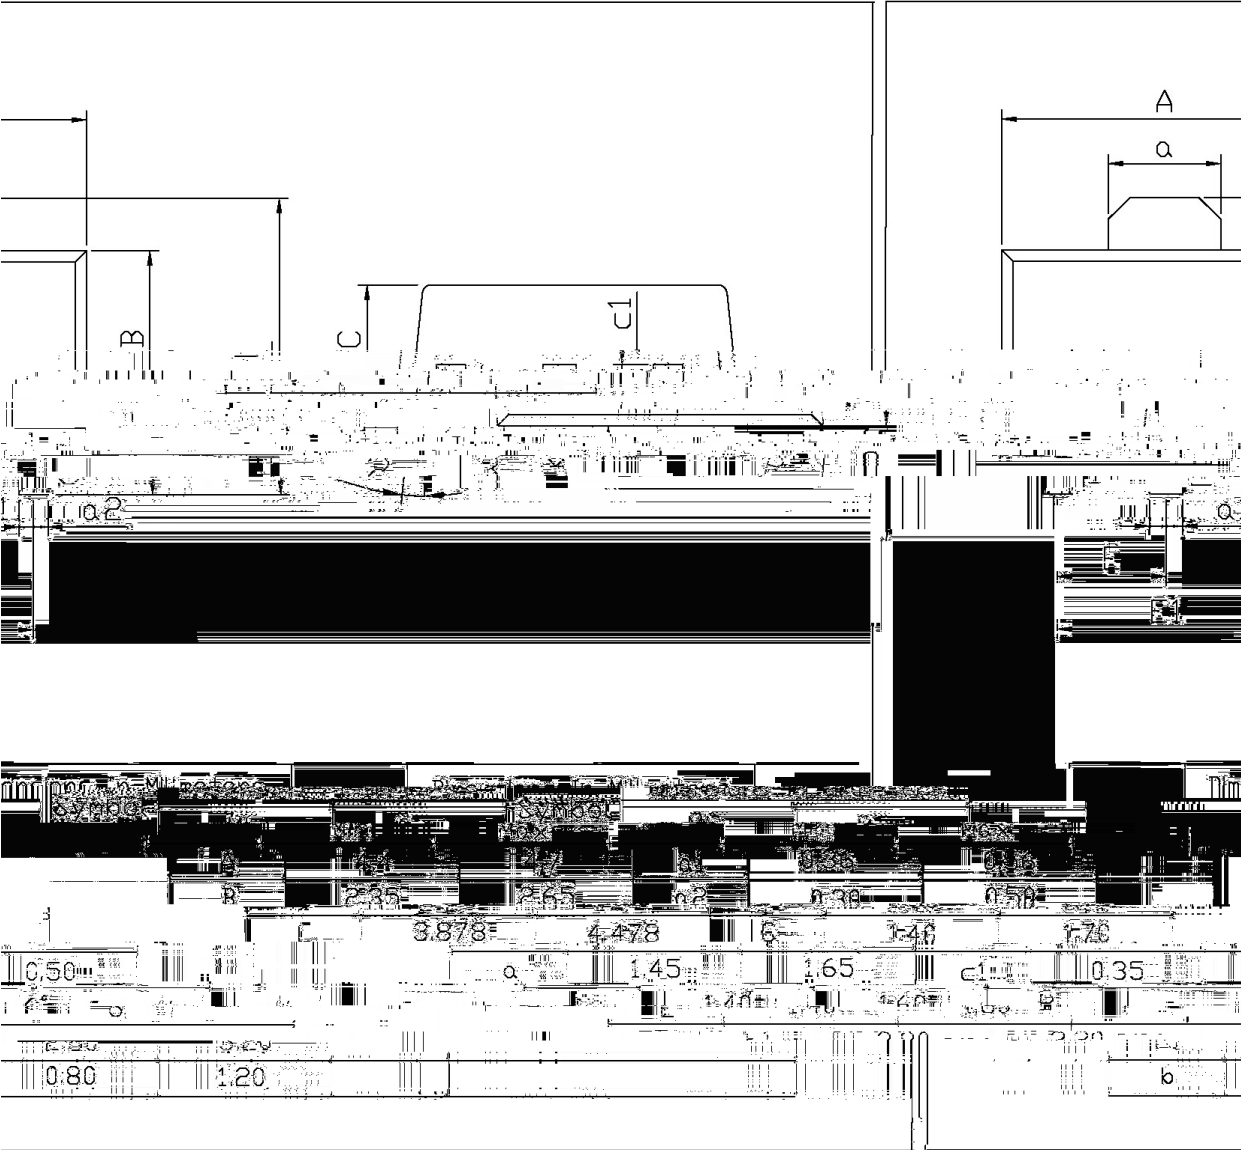


/ Marking Instructions

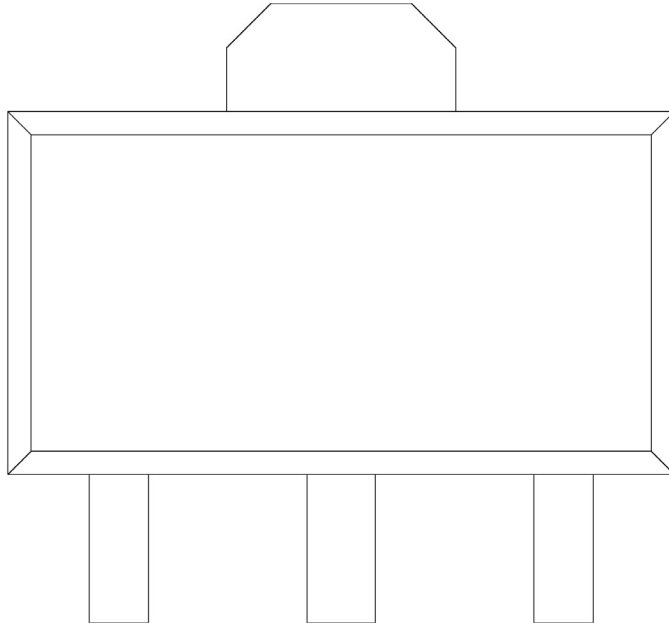

**

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

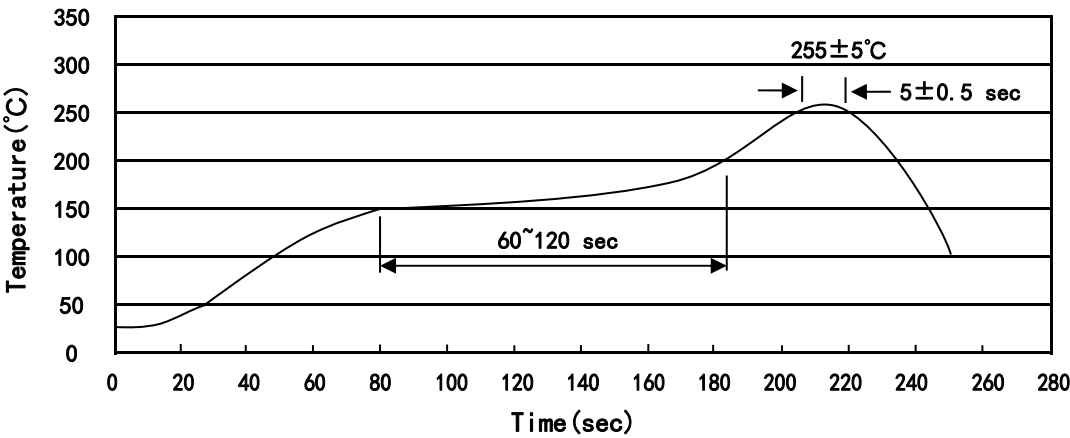

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	1,000	7	7,000	6	42,000			

/ Notices