



		±	
	θ		
	θ		

≤μ≤




≤








		μ				
						μ
					±	
		μ				
μ						Ω
μ						
		μ				




 Ω Ω

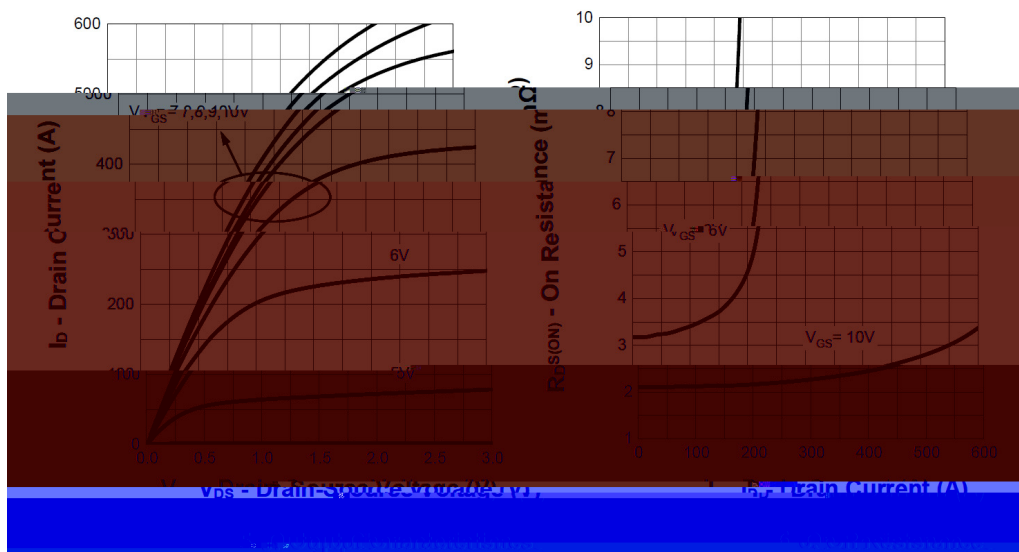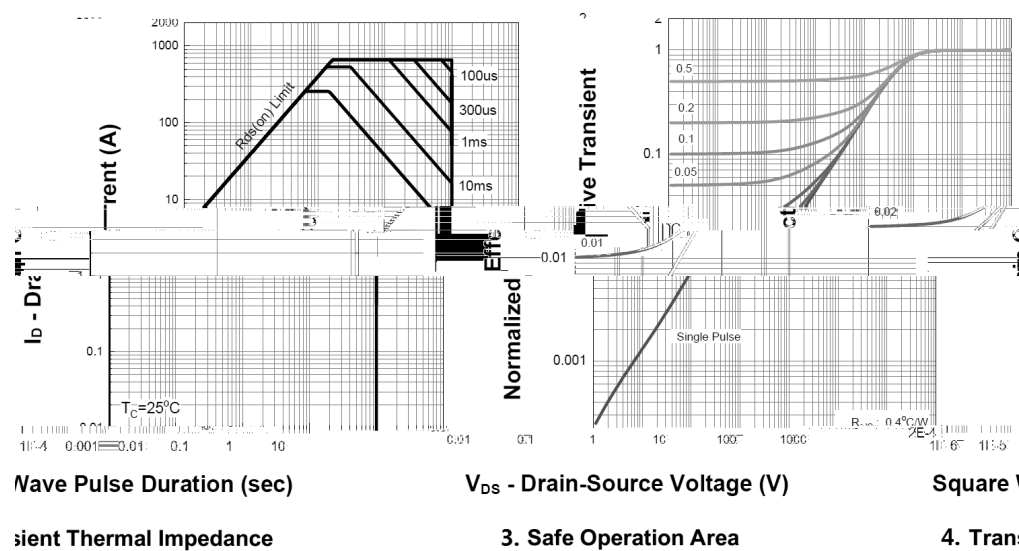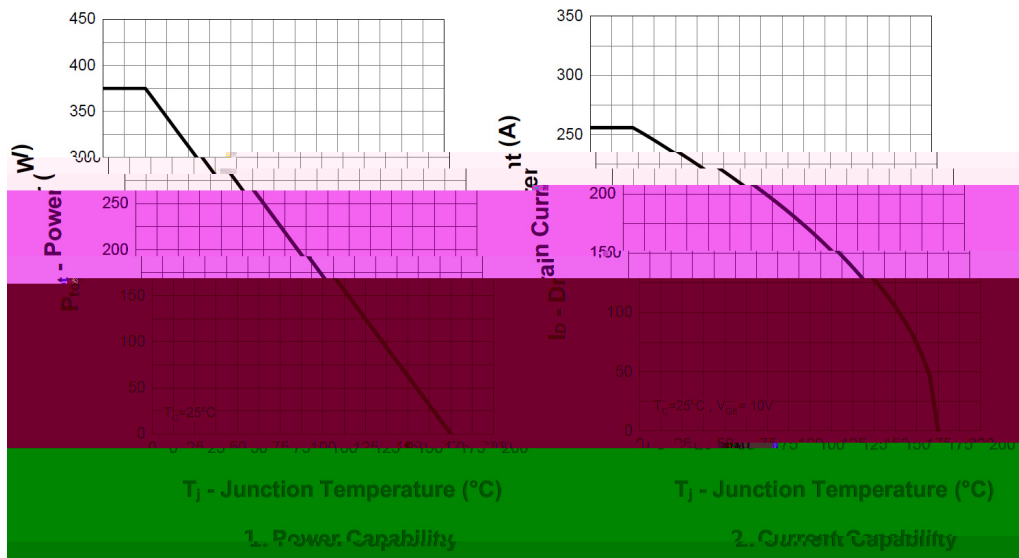

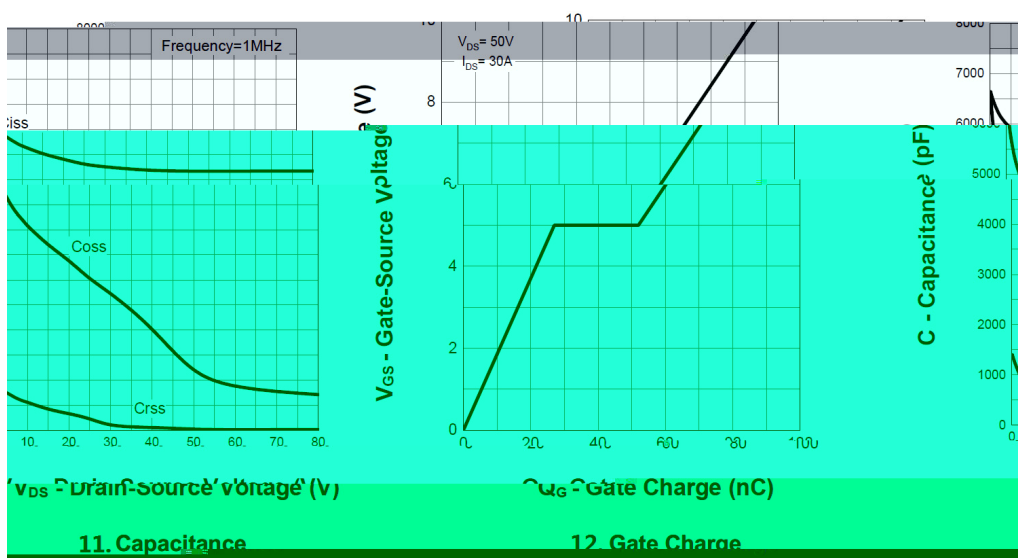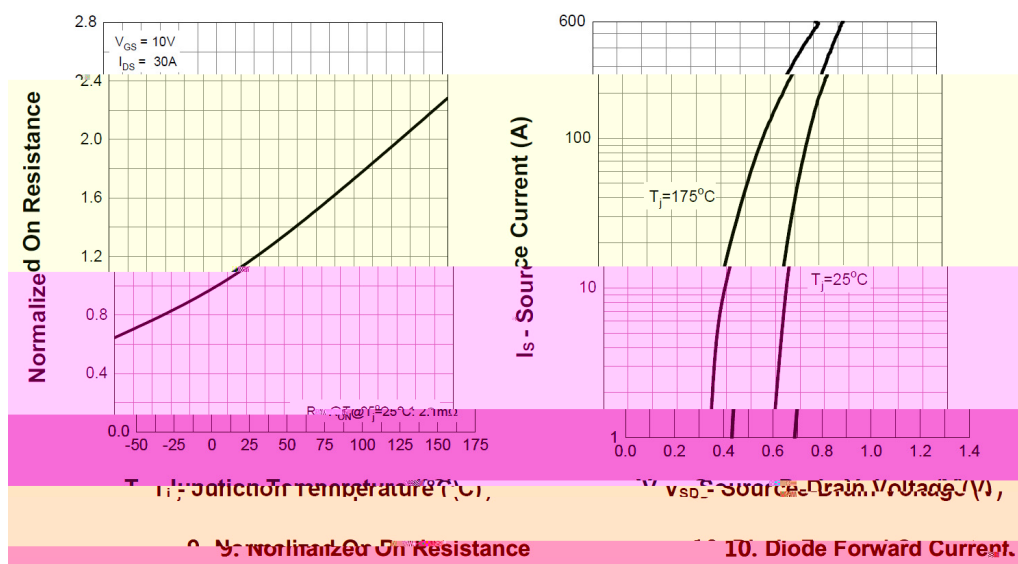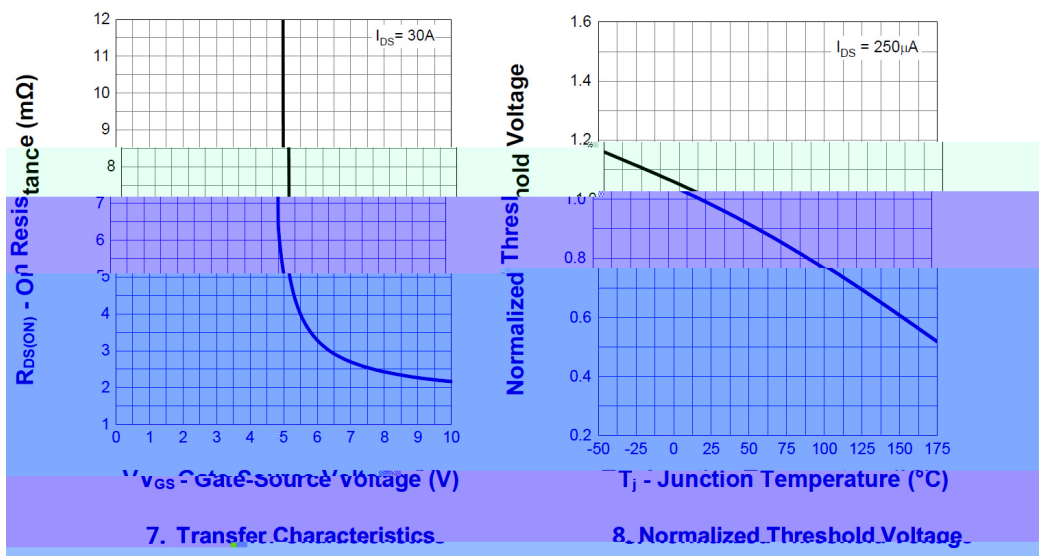

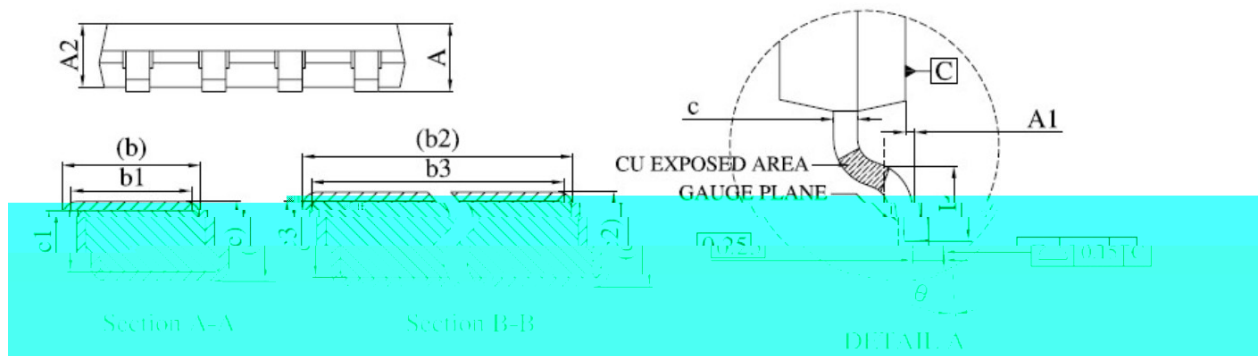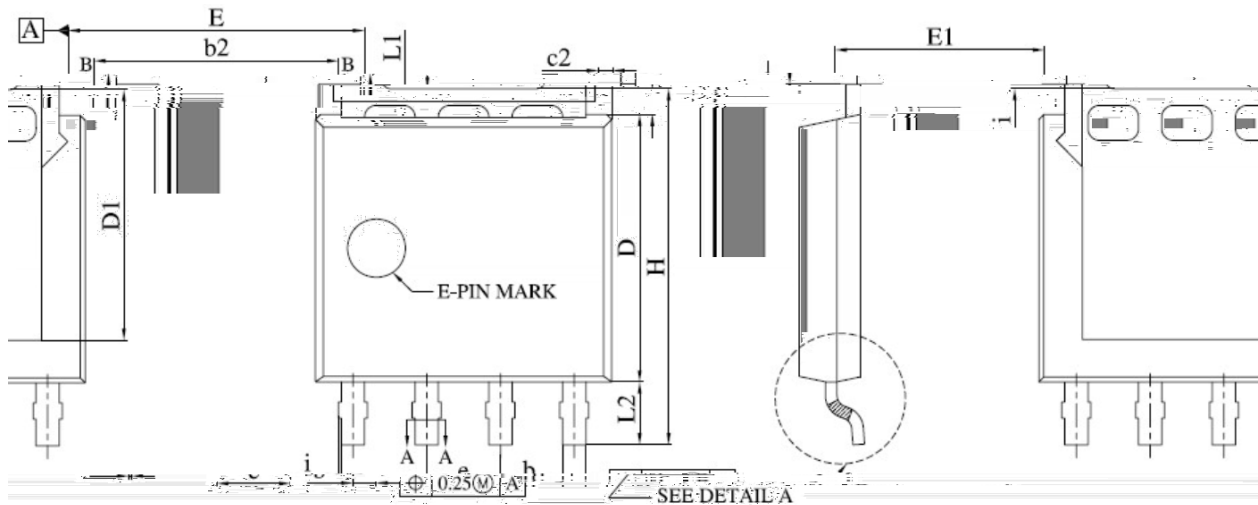


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeter	
	MIN.	MAX.		MIN.	MAX.
A	1.00	1.30	E _L	4.95	5.30
A1	0.00	0.15	E1 _L	3.50	3.70
A2	0.98	1.12	e	1.27 BSC.	
b	0.35	0.50	H	5.95	6.2
b1	0.32	0.46	i	-	0.2
b2	4.02	4.41	L	0.40	0.85
b3	4.00	4.37	r _L	0.27	0.57
c	0.19	0.25	L2	0.80	1.30
c1	0.17	0.23	θ	0°	8°
c2	0.24	0.30			
c3	0.22	0.28			
D	4.45	4.70			
DI	-	4.45			

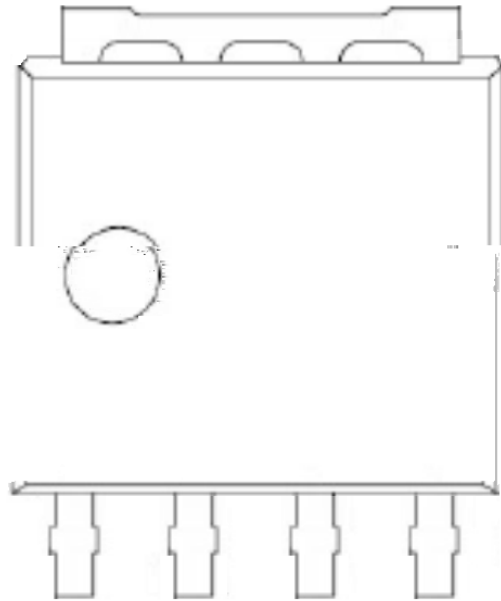

EU

Temperature Profile for IR Reflow Soldering(Pb-Free)

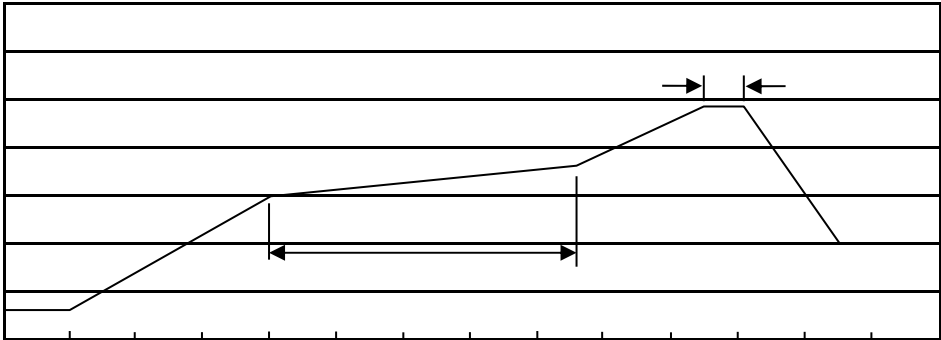

$\frac{3}{8}$ $\frac{3}{8}$
2 $\frac{3}{8}$ 2 2 $\frac{3}{8}$ 2
 $\frac{3}{8}$ $\frac{3}{8}$

2 $\frac{3}{8}$ 2

	Units/Reel 2	Reels/Inner Box 2	Units/Inner Box 2	Inner Boxes/Outer Box 2	Units/Outer Box 2	Reel	Inner Box	Outer Box

	Units/Reel 2	Reels/Inner Box 2	Units/Inner Box 2	Inner Boxes/Outer Box 2	Units/Outer Box 2	Reel	Inner Box	Outer Box