

/ Absolute Maximum Ratings(Ta=25)




	℃			
	℃			

N- /N-CHANNEL Electrical Characteristics(Ta=25)


		μ				
						μ
		℃				μ
		μ				
						Ω
						Ω
		Ω	Ω			

N-

/ N-CHANNEL Electrical Characteristic Curve

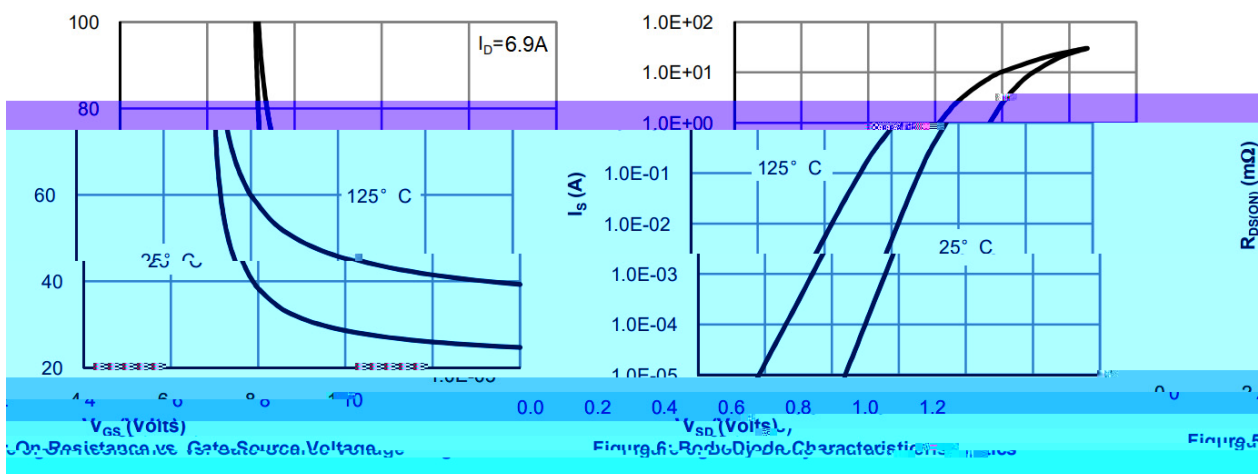
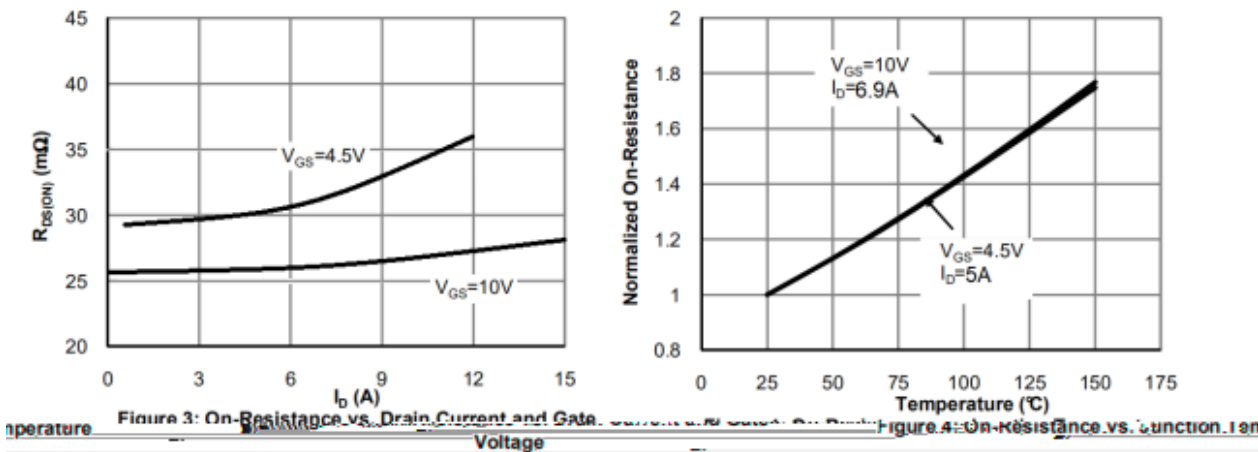
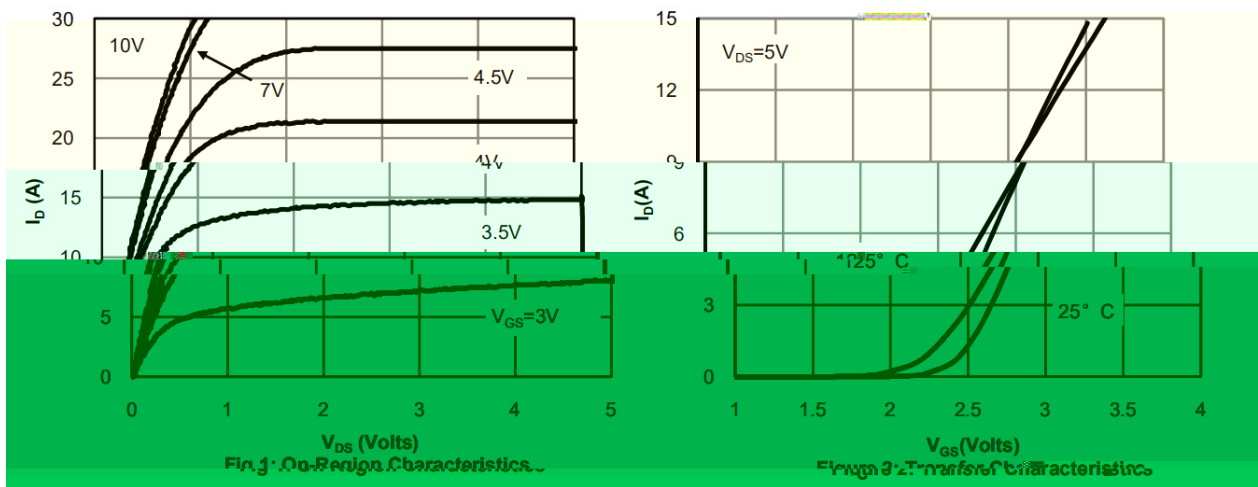


N- / N-CHANNEL Electrical Characteristic Curve


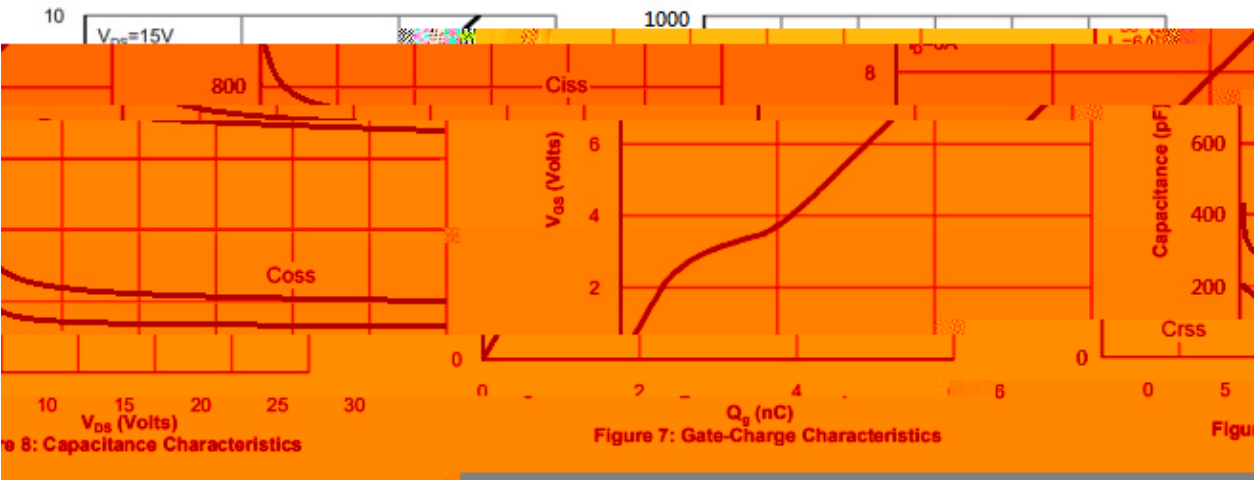


		μ				
						μ
		℃				μ
					±	
		μ				
						Ω
						Ω

Ω Ω

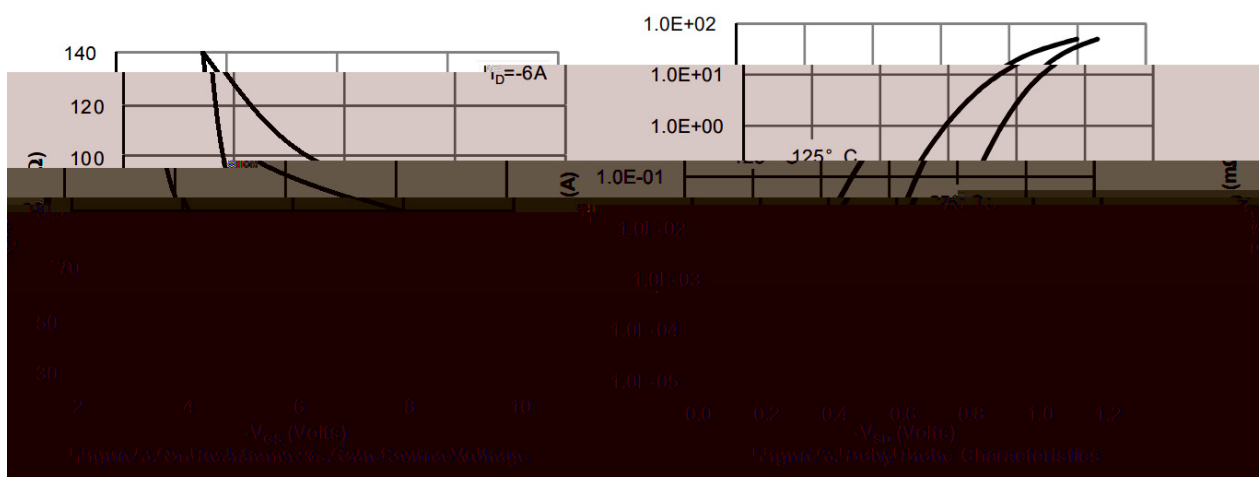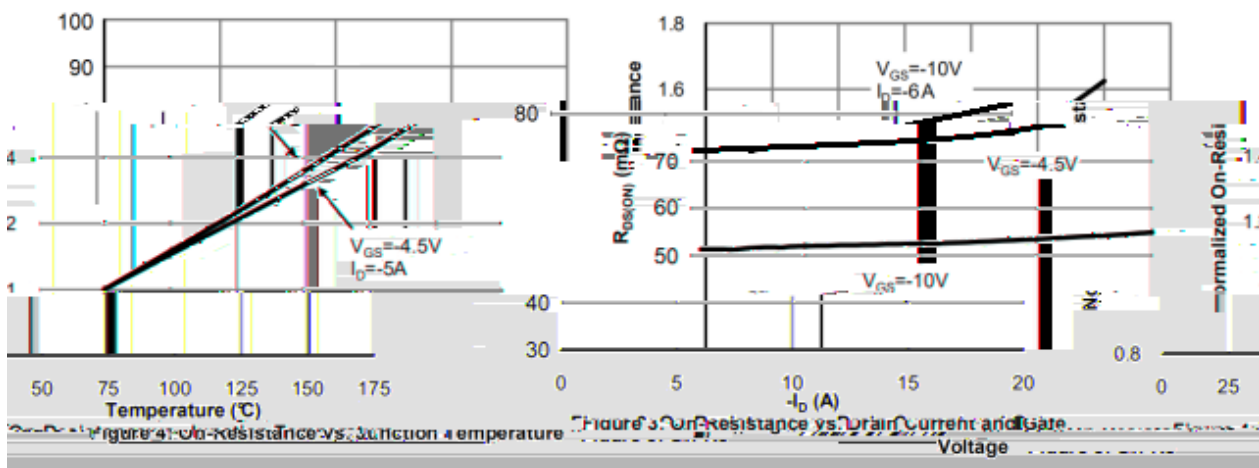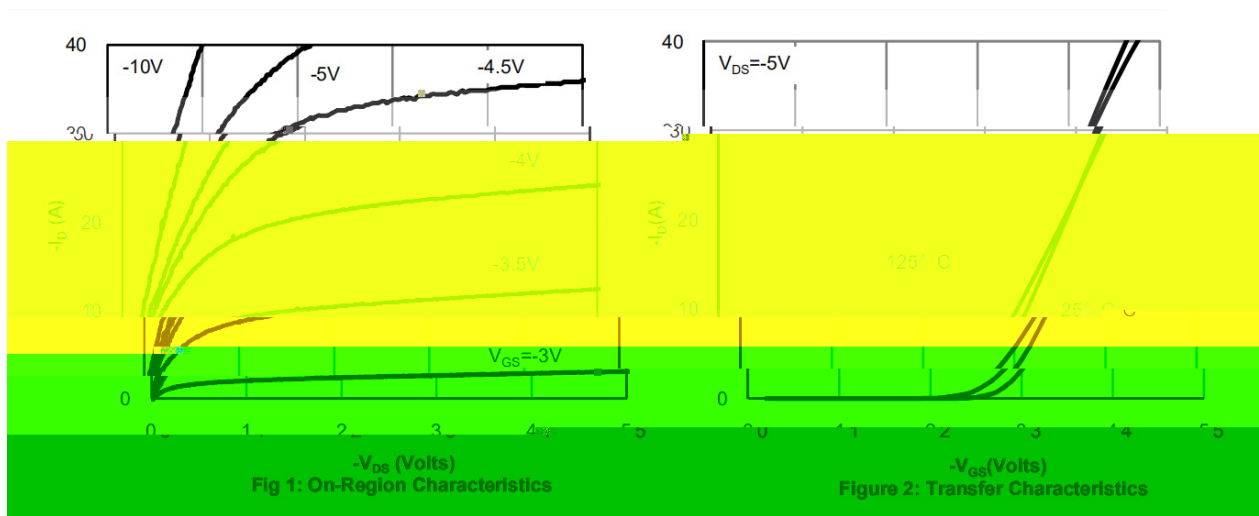P- / P-CHANNEL Electrical Characteristic Curve


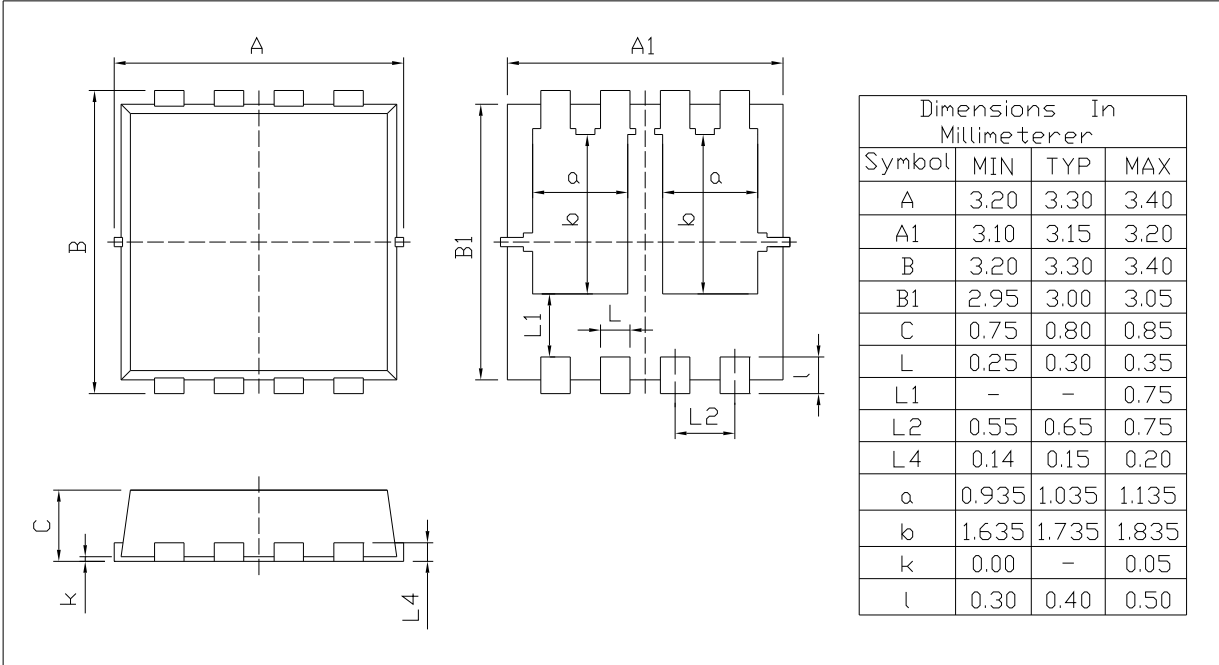
P- / P-CHANNEL Electrical Characteristic Curve

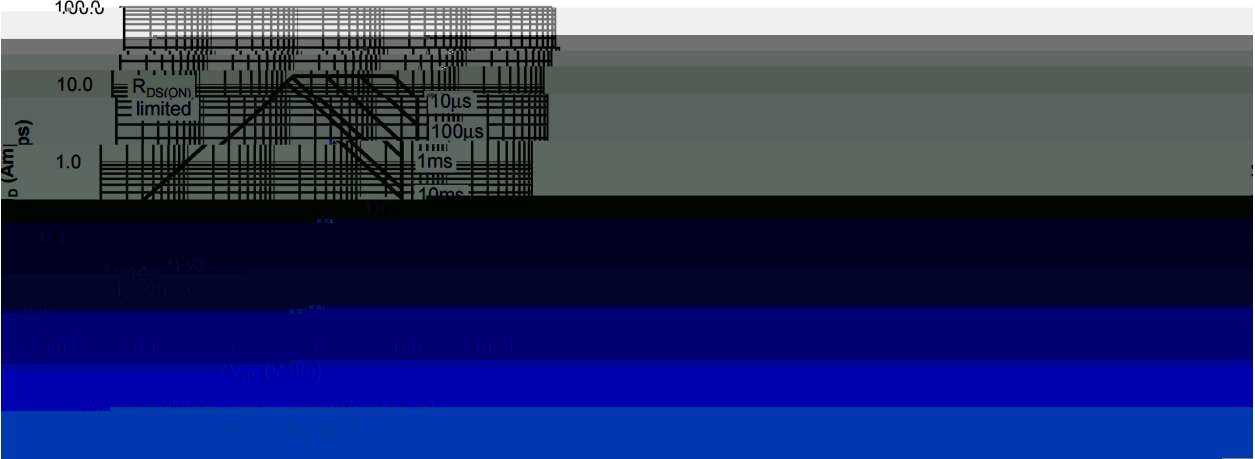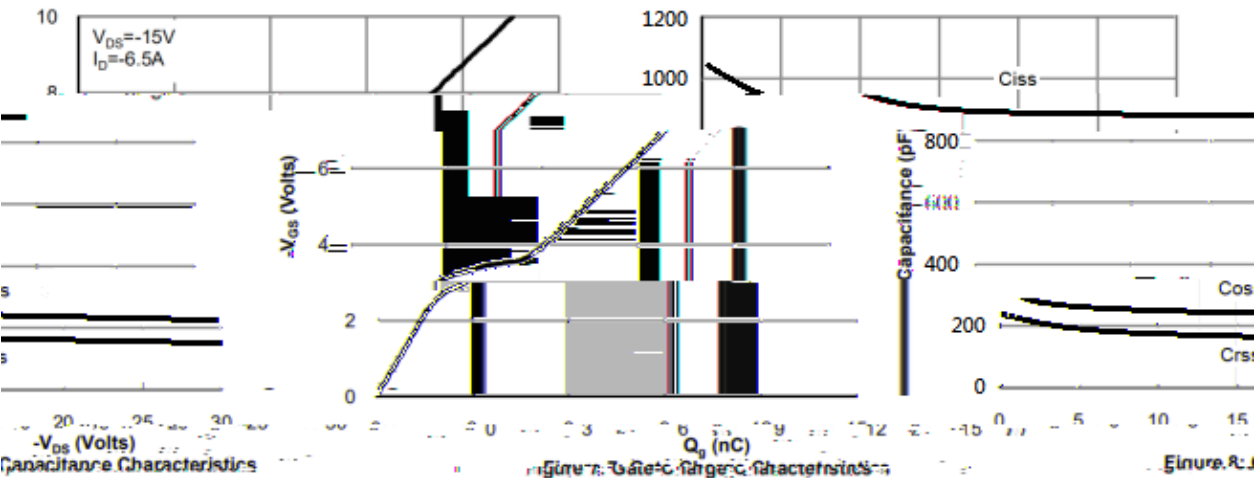

I Package Dimensions


PDFN3X3-8L

Unit:mm




Rev.00 202011

/ Marking Instructions

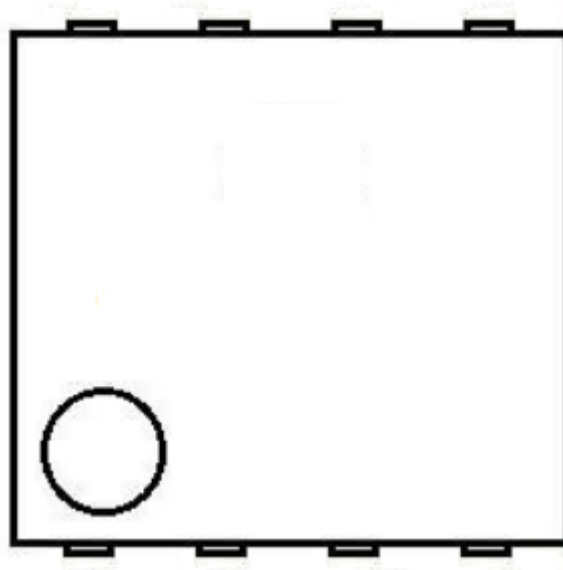

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

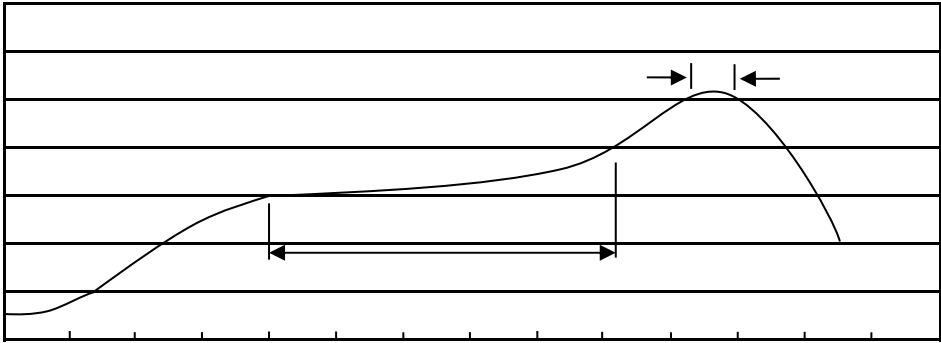

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		

/ Notices