

BRMM1W3V3Q~BRMM1W330Q

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning

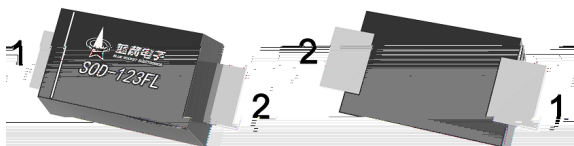

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

The recommended mounting pad size

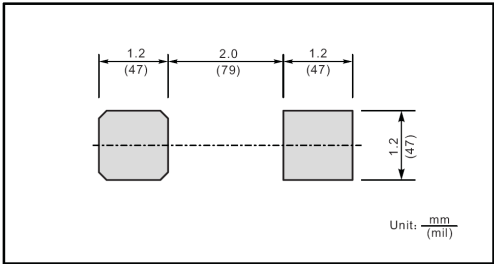

/ Marking

/ Absolute Maximum Ratings(Ta=25 )

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

/ Electrical Characteristics(Ta=25 )


|  |  |  |  |  |  | $\Omega$ | $\mu$ |  |  |
|--|--|--|--|--|--|----------|-------|--|--|
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |
|  |  |  |  |  |  |          |       |  |  |



/ Electrical Characteristics(Ta=25 )


|  |  |  |  |  |  | Ω | μ |  |  |
|--|--|--|--|--|--|---|---|--|--|
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |
|  |  |  |  |  |  |   |   |  |  |

/ Electrical Characteristic Curve

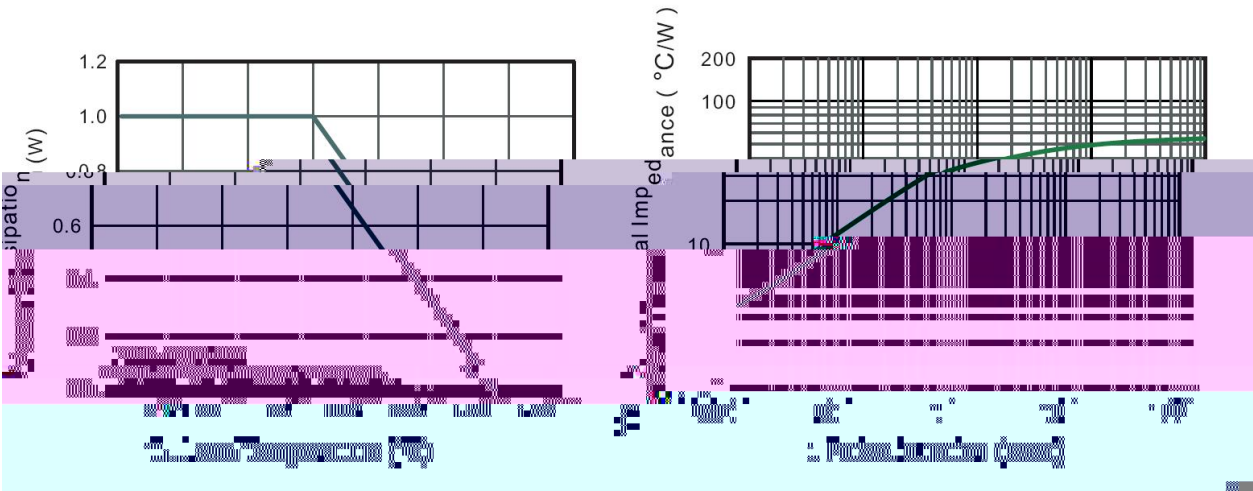


/ Package Dimensions

SOD-123FL

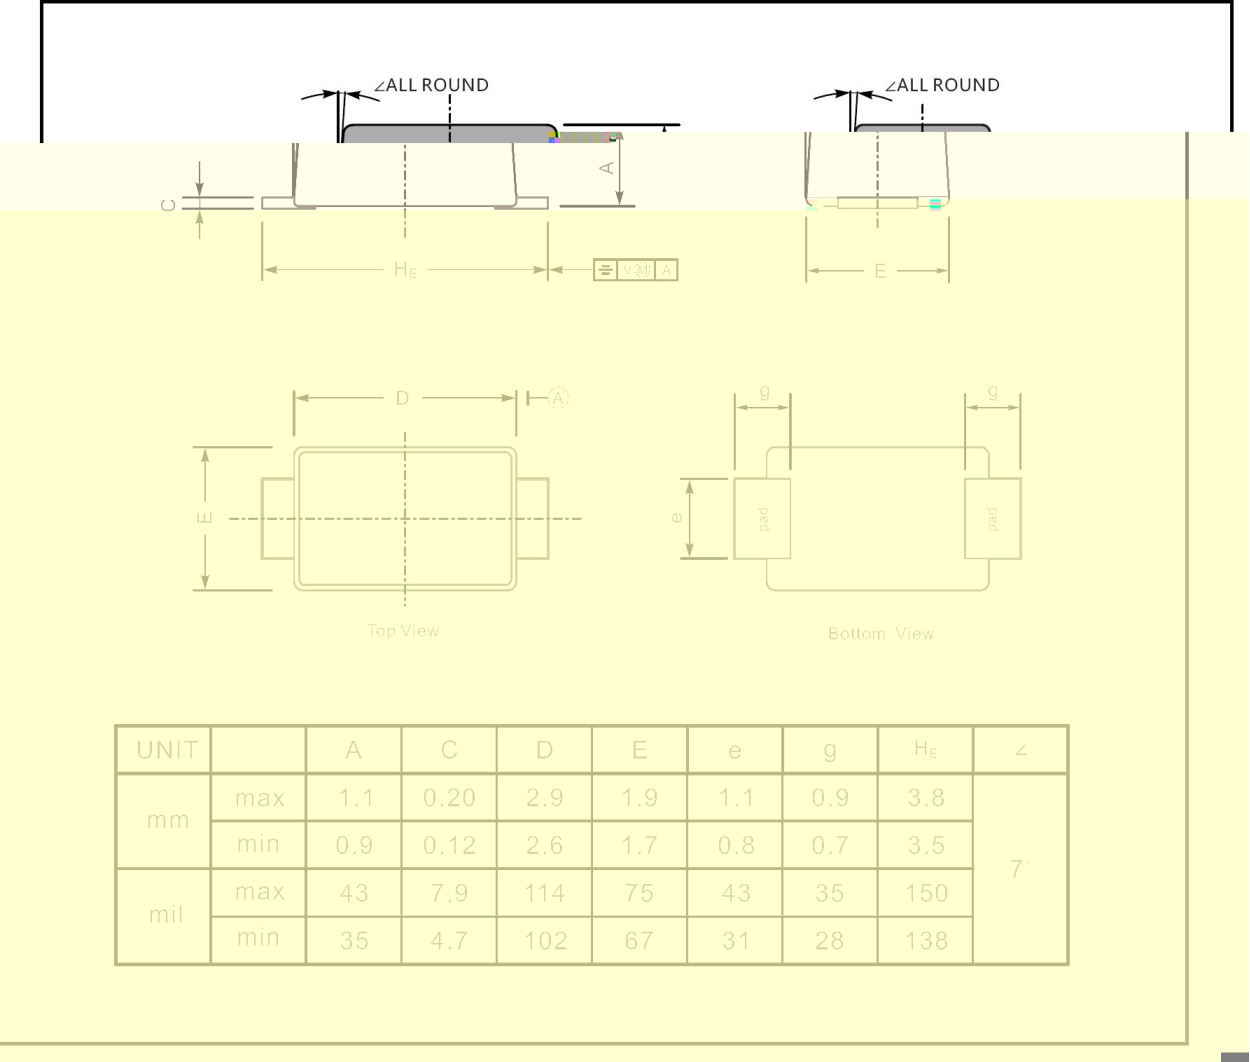


/ Marking Instructions

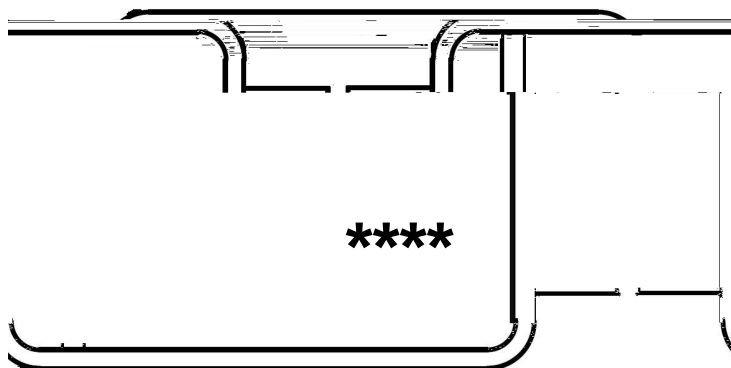

\*\*\*\*

\*\*\*\*

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

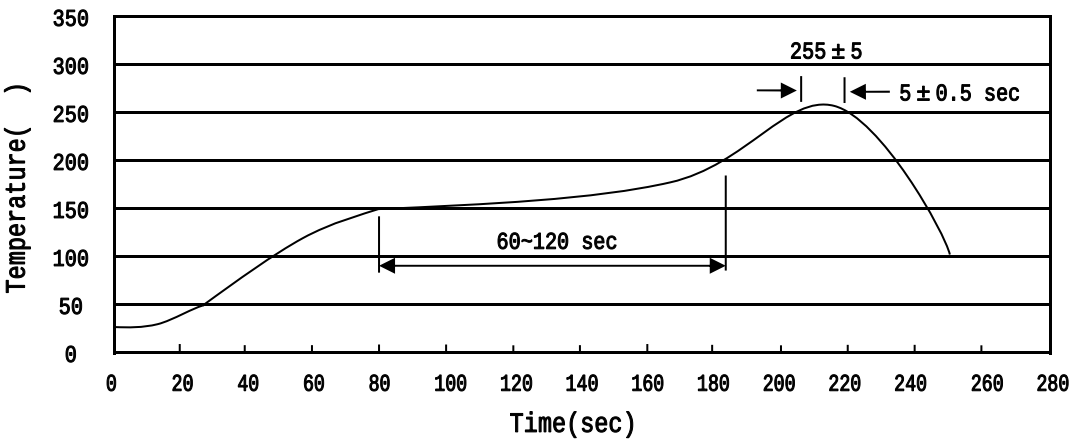

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

|  | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel | Inner Box | Outer Box |
|--|-----------------|----------------------|----------------------|----------------------------|----------------------|------|-----------|-----------|
|  |                 |                      |                      |                            |                      |      |           |           |

/ Notices