


3.0A

，：，：


。

，

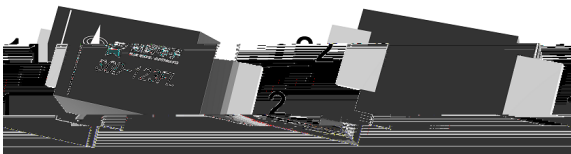

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

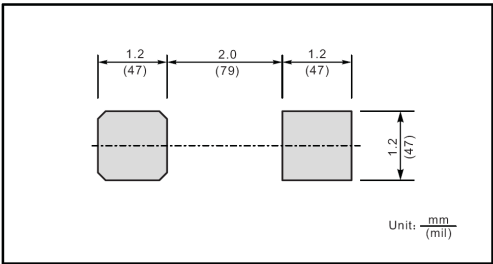

	()		
)			
	θ		℃
			℃
			℃

			数值	
		℃		
		℃		

Fig.1 Forward Current Derating Curve

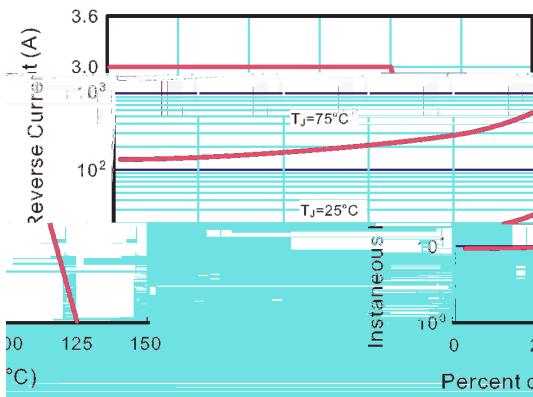


Fig.2 Typical Reverse Characteristics


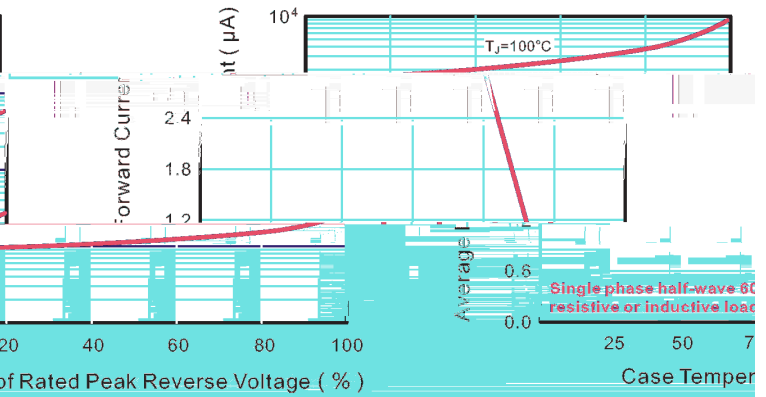


Fig.3 Typical Forward Characteristic

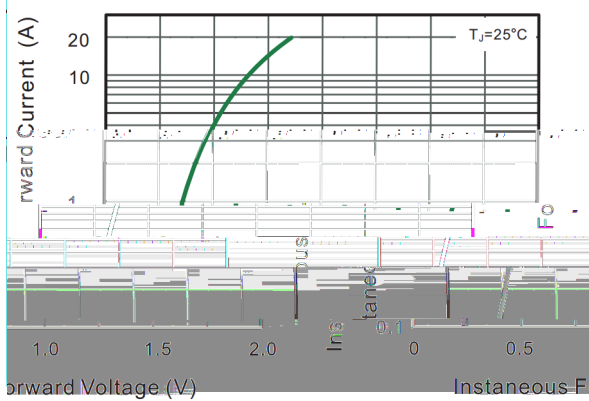

Junction Capacitance

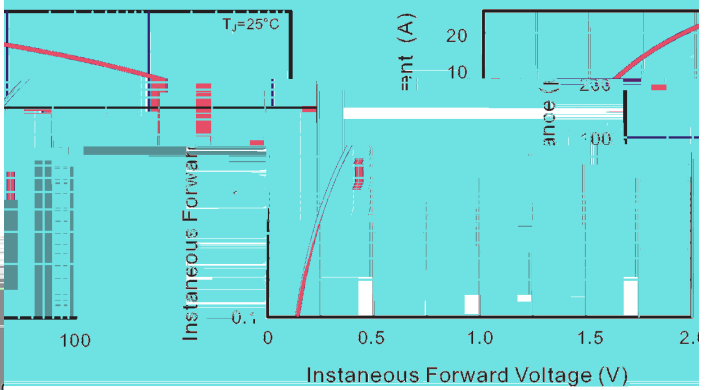


Fig.3 Typical Forward

Fig.4 Typical Transient Thermal Impedance




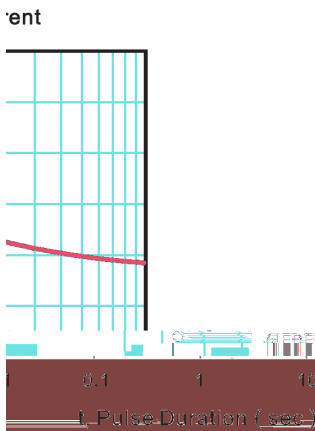


Fig.5 Maximum Non-Repetitive Peak

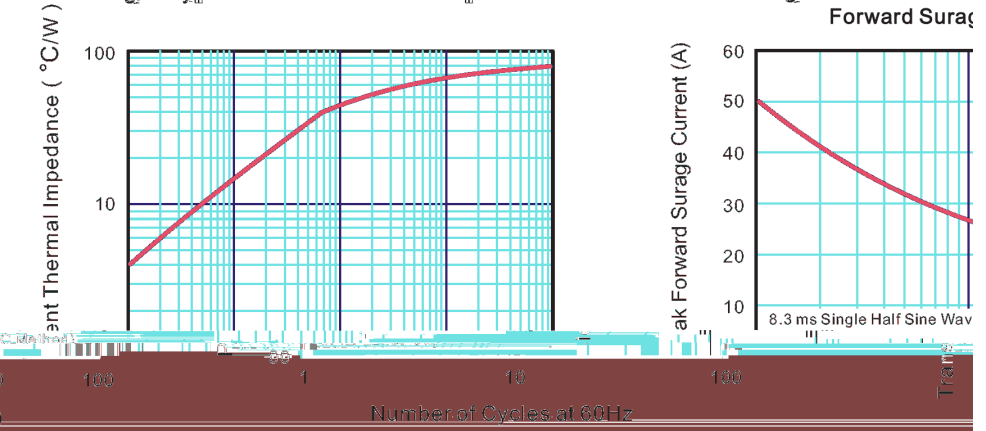


SOD-123FL

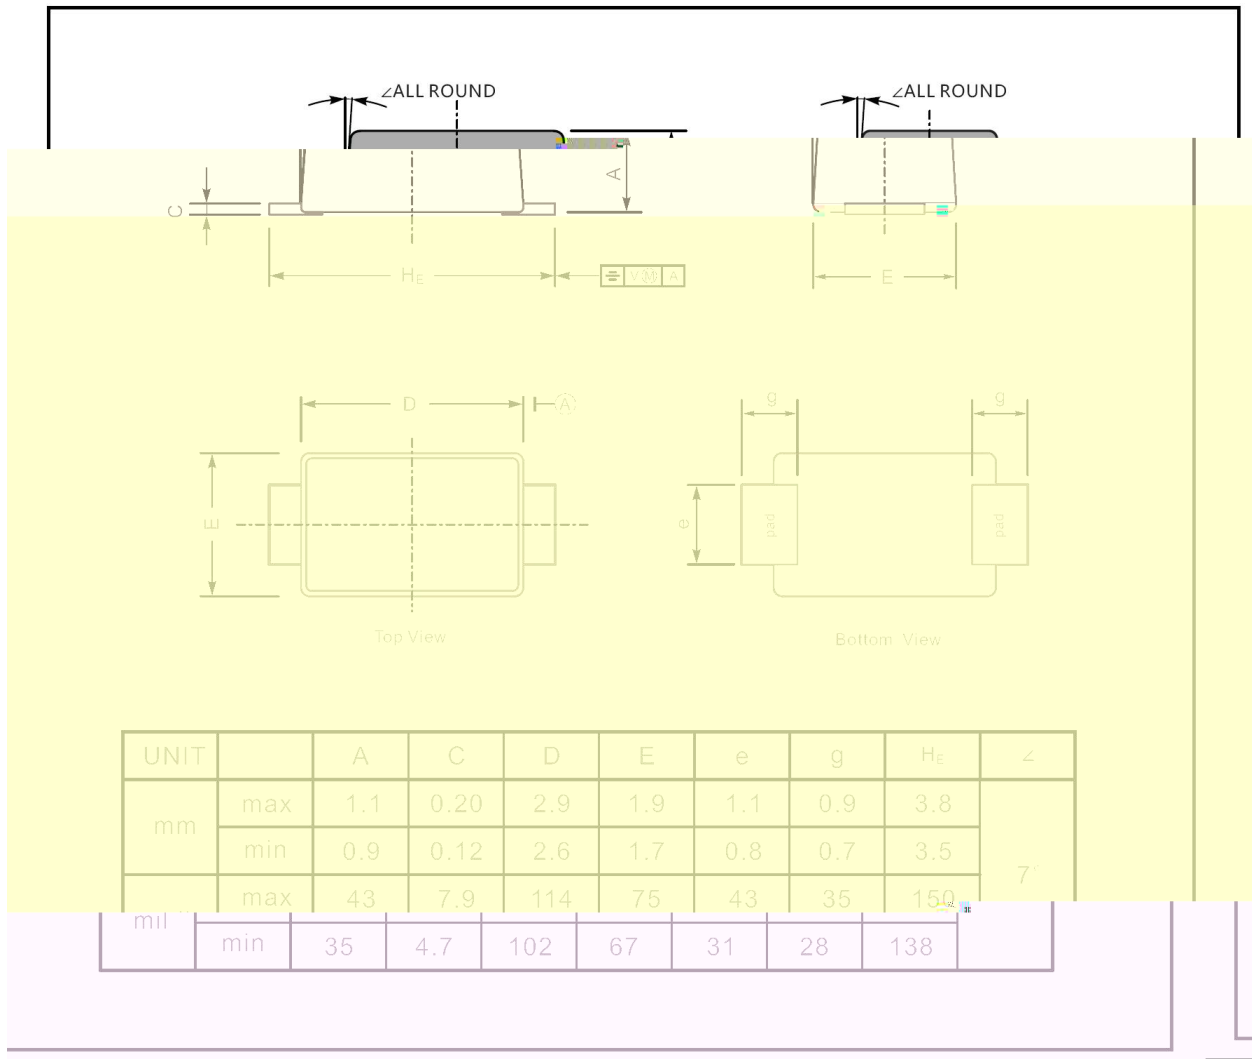

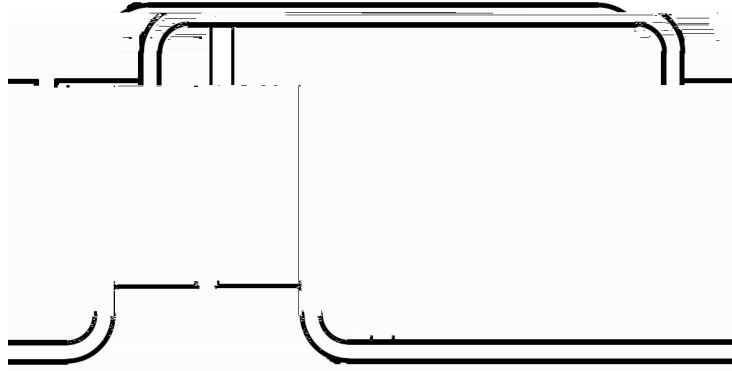

34L

34L

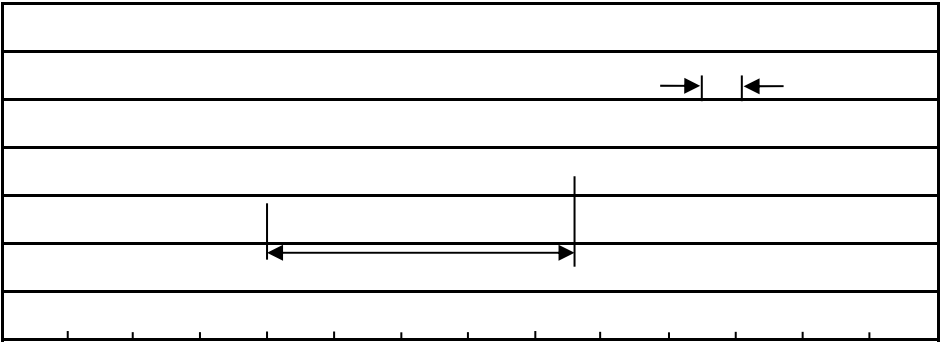

± ± ± ±

± ±

						"		