
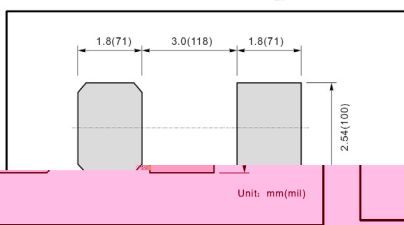


50V~600V	1.0A	SMBF
----------	------	------

	RoHS	2011/65/EU	
c			0

•

PIN	DESCRIPTION
1	Cathode
2	Anode




1 7

/ Electrical Characteristic Curve



/ Package Dimensions

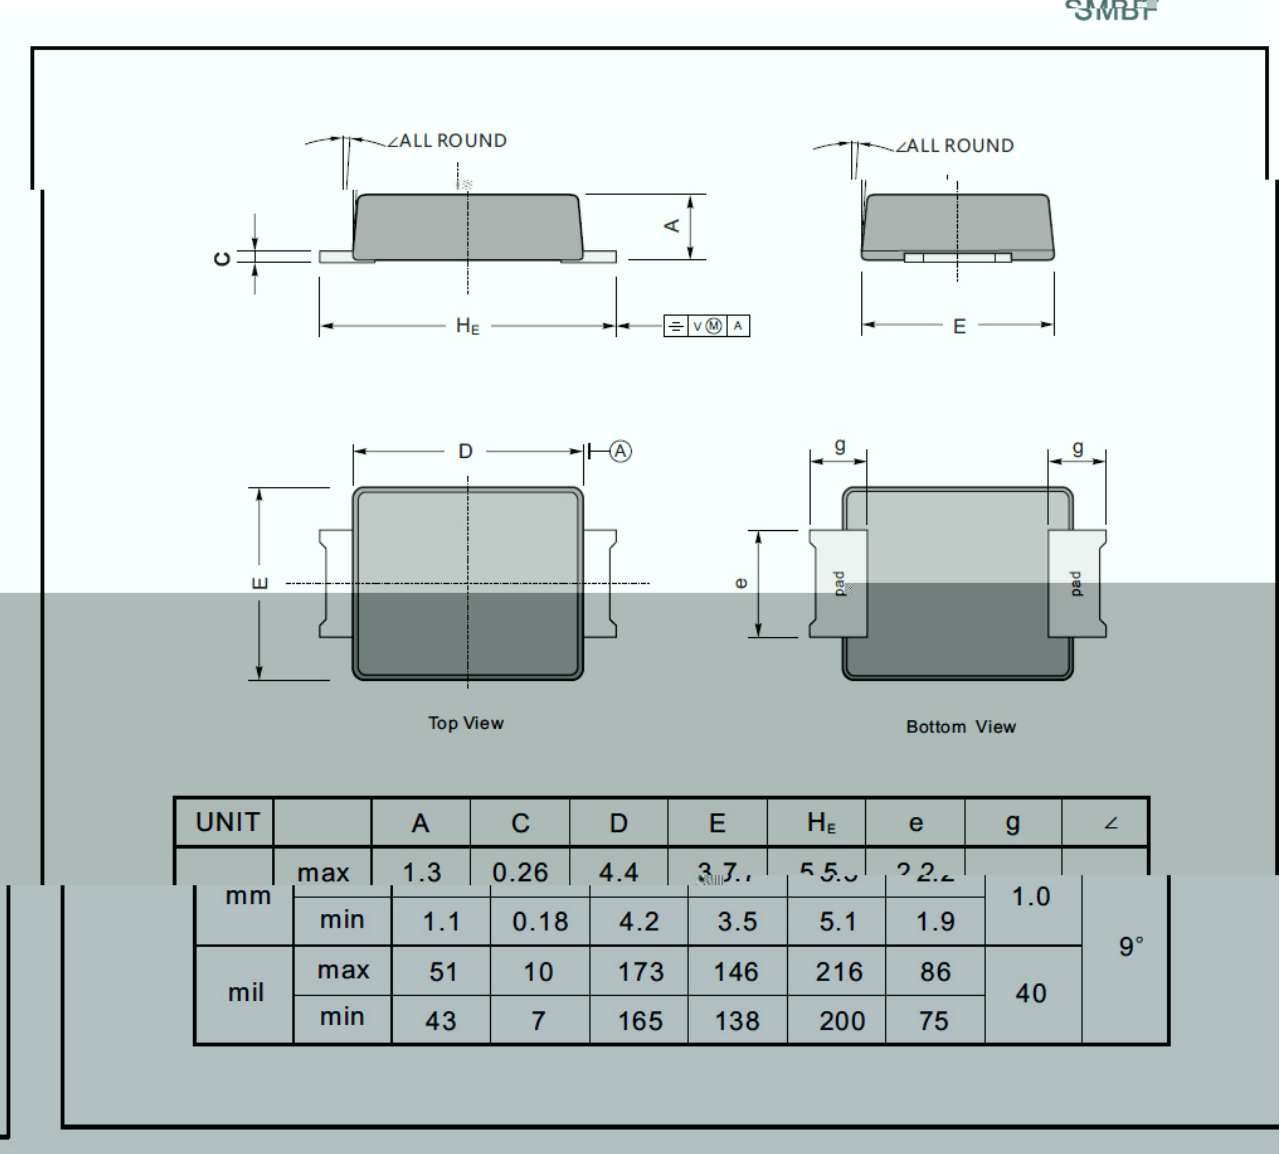


/ Marking Instructions


Marking

Type number	Marking code
ES1ABF	ES1ABF
ES1BBF	ES1BBF
ES1CBF	ES1CBF
ES1DBF	ES1DBF
ES1EBF	ES1EBF
ES1GBF	ES1GBF
ES1JBF	ES1JBF

/ Marking Instructions

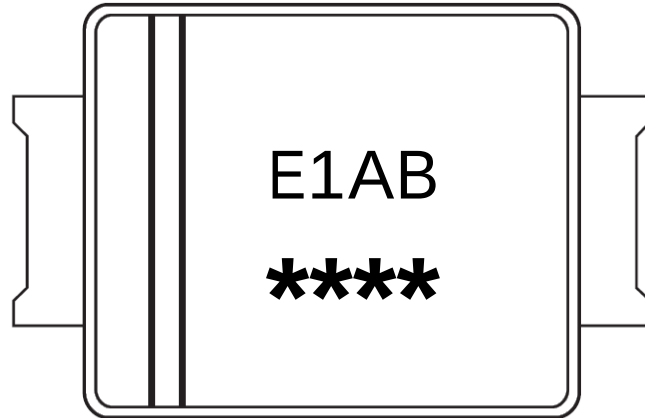

() / b no r o o b f b i i a b f d d b

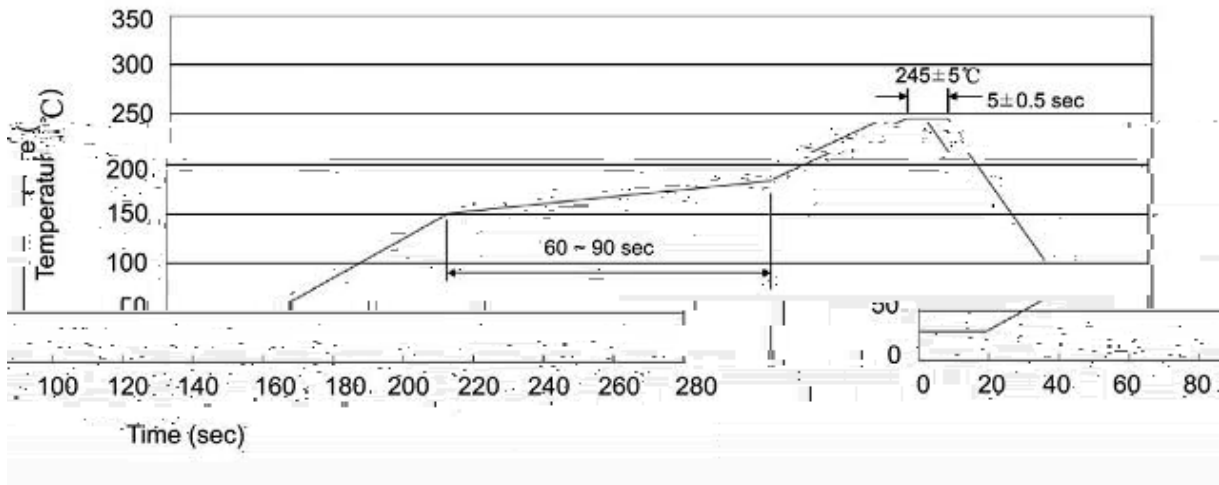

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱