


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

The recommended mounting dimensions:

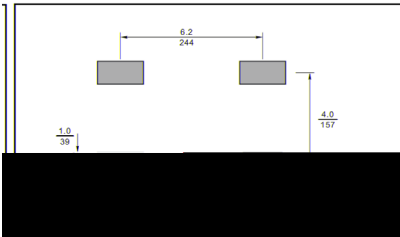

/ Marking

/ Absolute Maximum Ratings(Ta=25)


℃			
()			
	θ		℃
			℃

×

/ Electrical Characteristics(Ta=25)


		℃		μ
		℃		μ

/ Package Dimensions

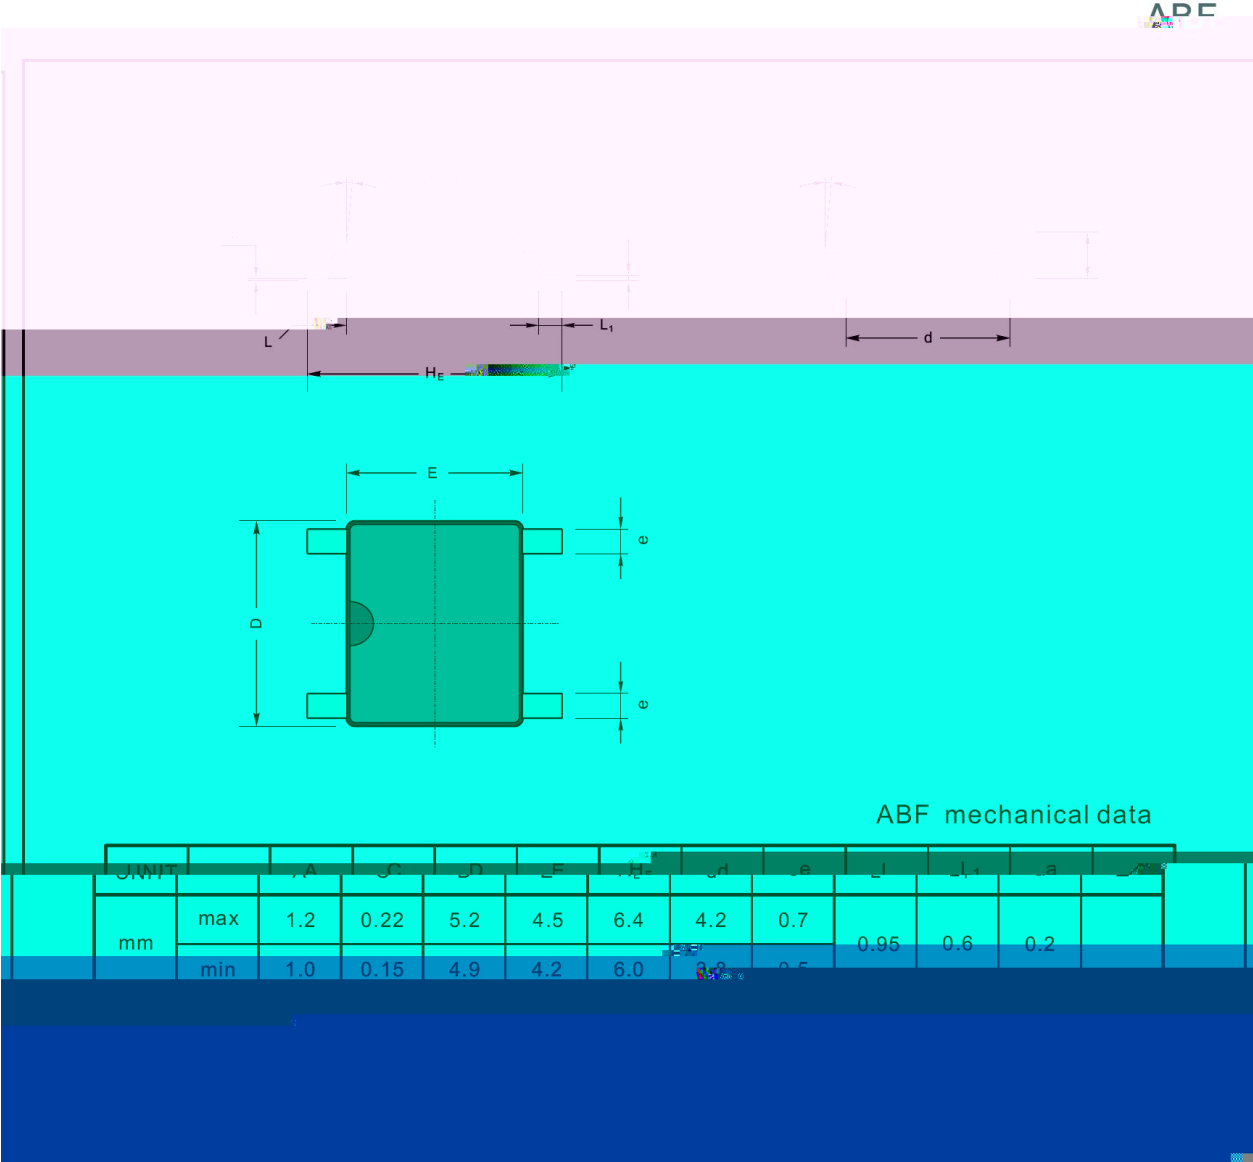


/ Marking Instructions

Marking


Type number	Marking code
FTB10F-15	F10F15
	

/ Marking Instructions

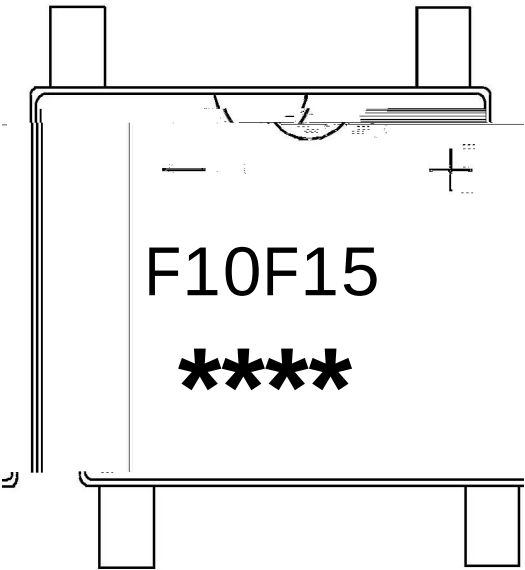

F10F15			
****	1	*	3 *
F10F15			
****	*		*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

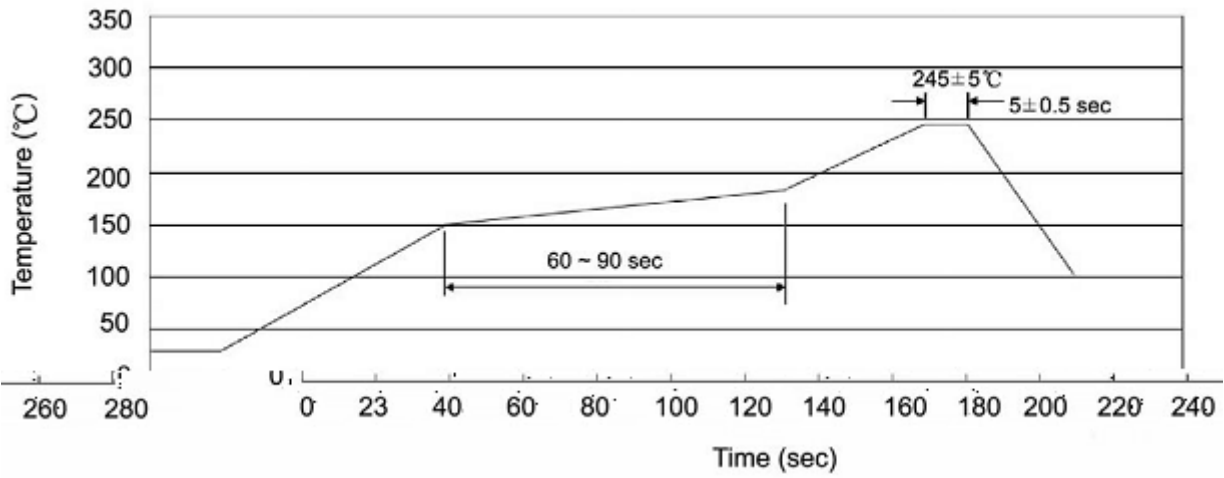

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱	"	盒	箱

/ Notices