

/ Descriptions

2.0A ABF
2.0A Surface Mount Glass Passivated Bridge Rectifier, ABF thin package.

/ Features


1000V 2.0A

Glass Passivated Chip Junction,Reverse Voltage: 1000V,Forward Current:2.0A, Fast reverse recovery time,Designed for Surface Mount Application.Halogen free product.


/ Applications

General purpose.

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

The recommended mounting pad size

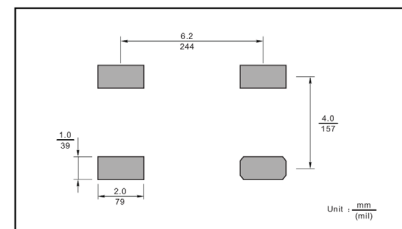

/ Marking

See Marking Instructions.


Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	1000	V
Maximum RMS Voltage	V_{RMS}	700	V
Maximum DC Blocking Voltage	V_{DC}	1000	V
Average Rectified Output Current at $T_c = 125$	I_o	2.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	60	A
Typical Junction Capacitance ^{Note1}	C_j	40	pF
Typical Thermal Resistance ^{Note2}	$R_{\theta JA}$	70	°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55~150	°C

Note:


- 1.Measured at 1MHz and applied reverse voltage of 4 V D.C.
2. Mounted on glass epoxy PC board with 4 × 1.0" X 1.0" (2.54 X 2.54 cm) copper pad.

Parameter	Symbol	Test Conditions	Rating	Unit
Forward Voltage per element	V_F	$I_F=2.0A$	1.3	V
Maximum DC Reverse Current at Maximum DC Blocking Voltage	I_R	$T_a=25$	5.0	μA
		$T_a=125$	50	μA

/ Electrical Characteristic Curve

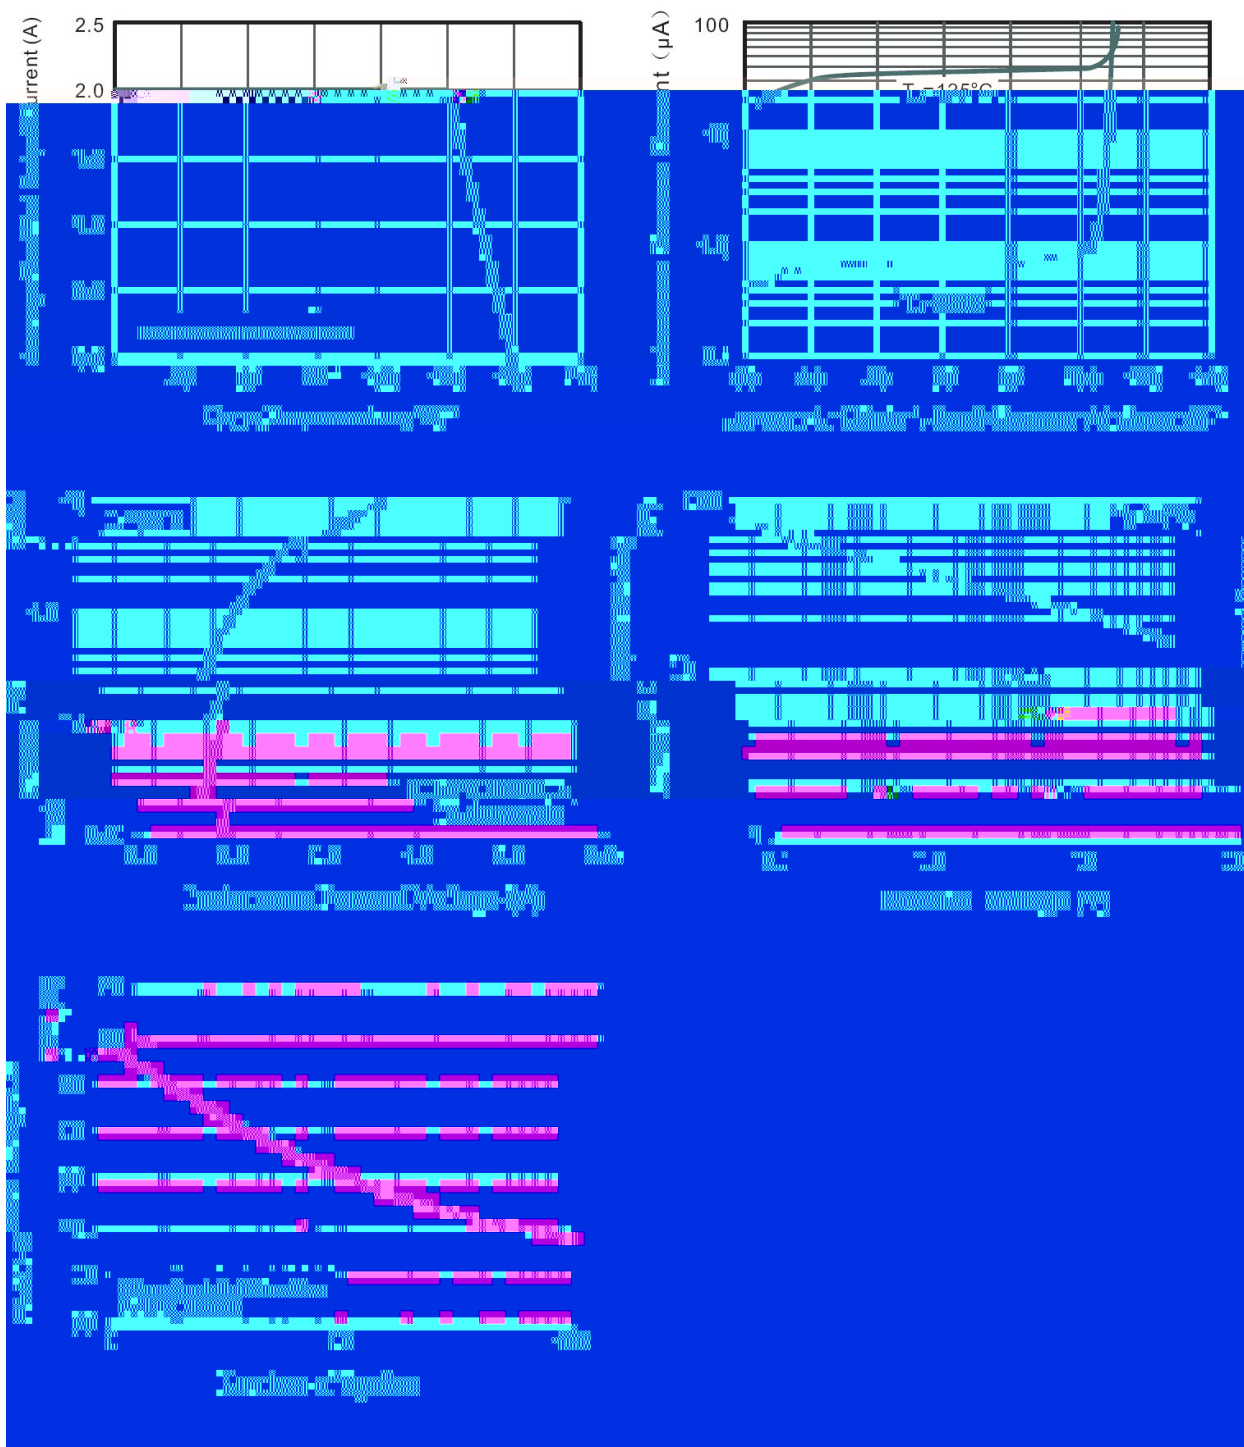


/ Package Dimensions

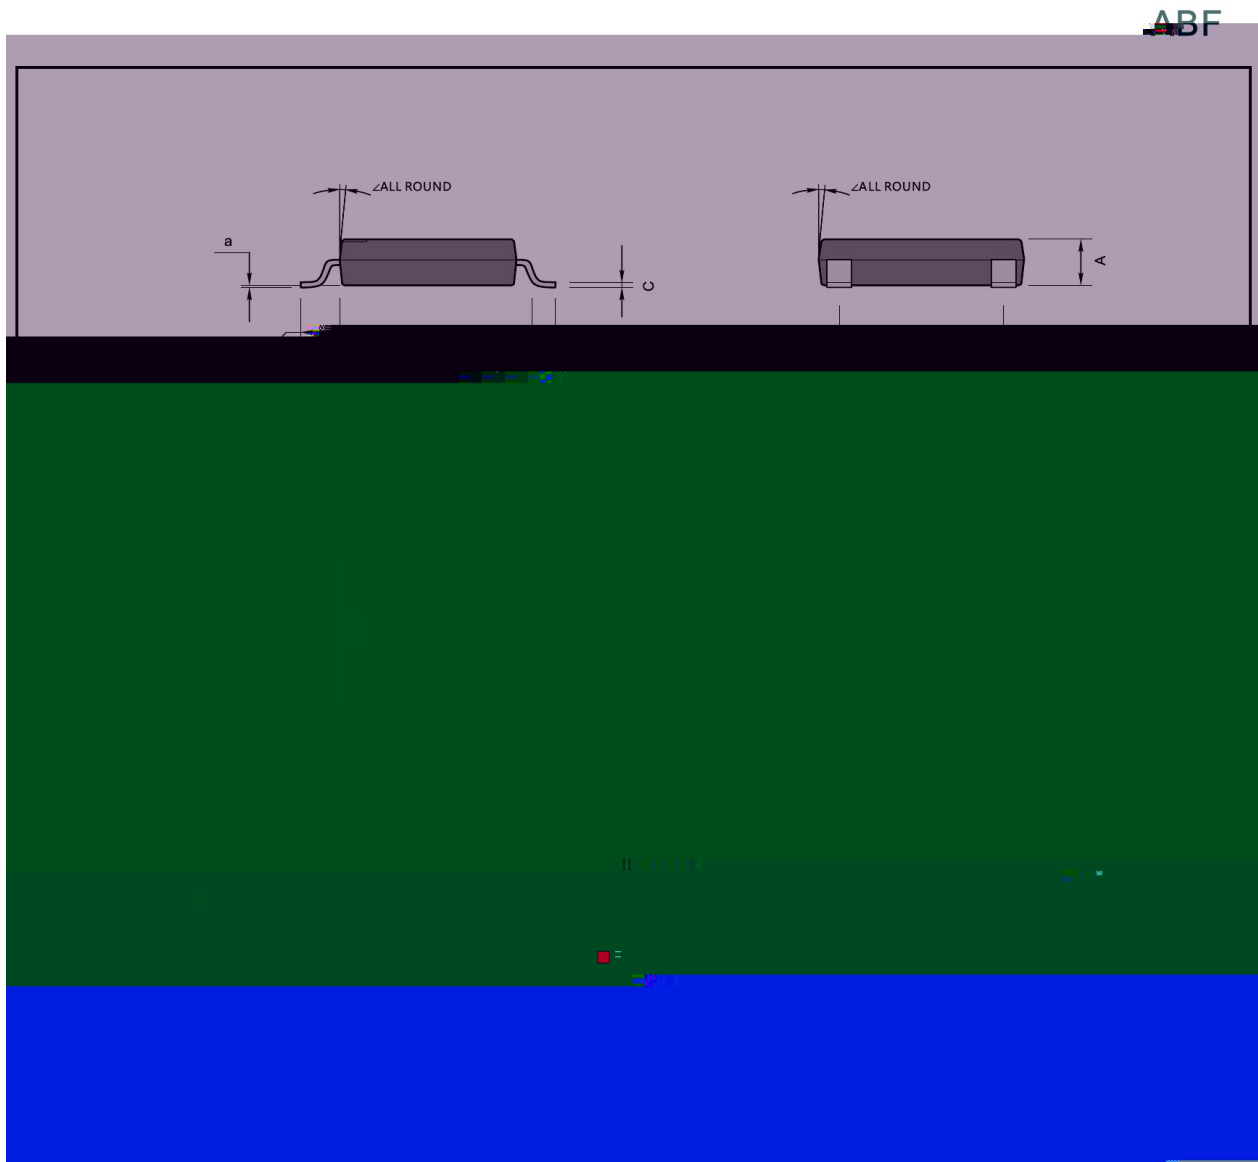


/ Marking Instructions

Marking

Type number	Marking code
FTB10F-20	F10F20
	

/ Marking Instructions

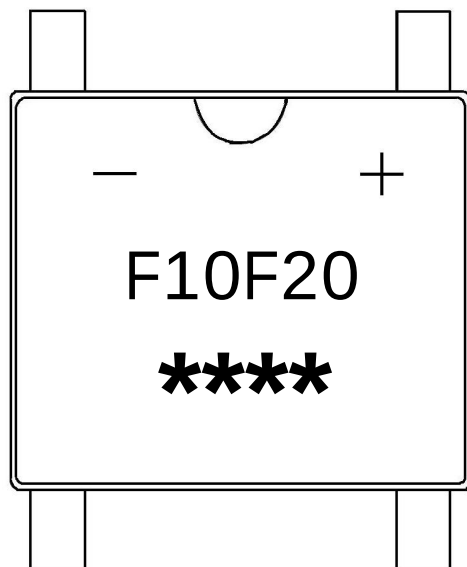

F10F20

1


3

Note:

F10F20 Product Type Code

**** Lot No. Code The 1st means:YM Code The last 3 means:little Lot
No Code

() /

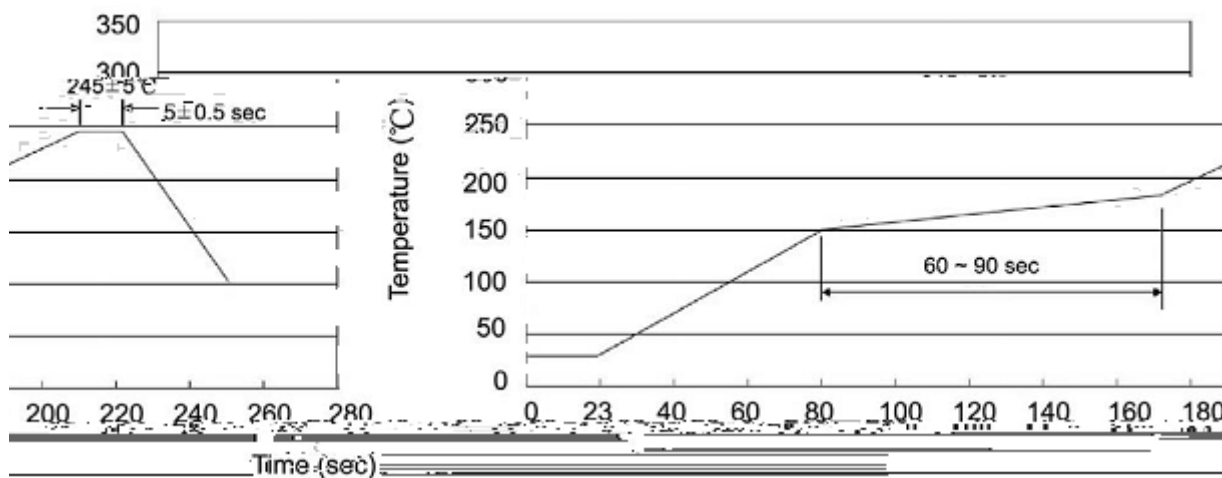

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------