

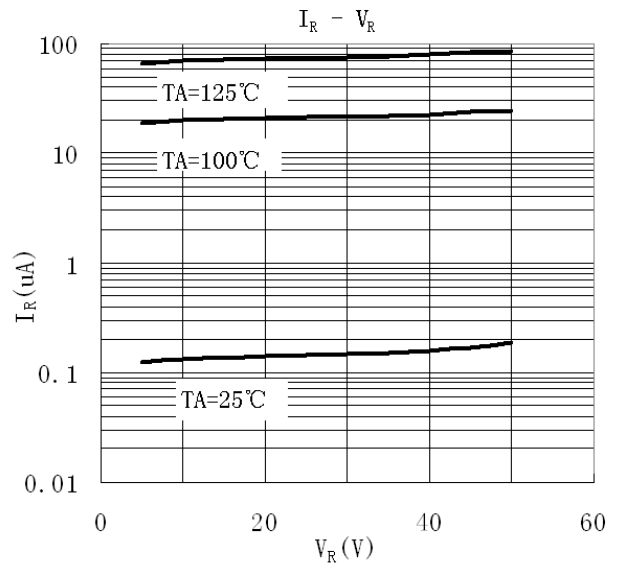
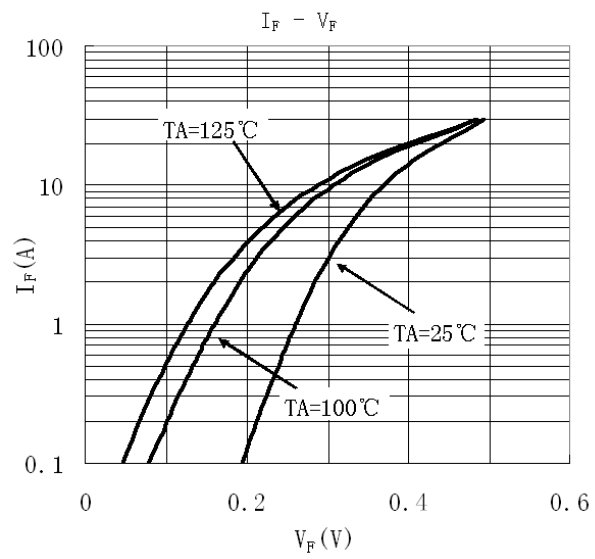
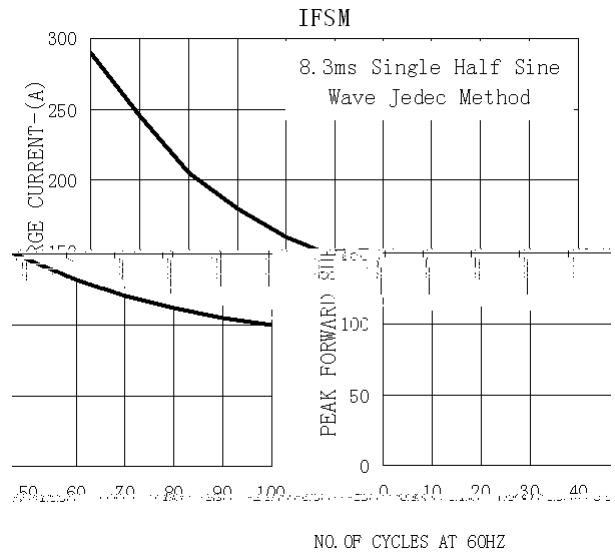



|  |              |   |  |
|--|--------------|---|--|
|  |              |   |  |
|  |              |   |  |
|  |              |   |  |
|  |              |   |  |
|  |              |   |  |
|  |              |   |  |
|  |              | ~ |  |
|  | $\theta$ ( ) |   |  |

|  |     |   |  |  |  |  |
|--|-----|---|--|--|--|--|
|  |     |   |  |  |  |  |
|  |     |   |  |  |  |  |
|  |     | ℃ |  |  |  |  |
|  |     | ℃ |  |  |  |  |
|  |     | ℃ |  |  |  |  |
|  |     | ℃ |  |  |  |  |
|  | ( ) | ℃ |  |  |  |  |
|  |     | ℃ |  |  |  |  |
|  |     | ℃ |  |  |  |  |

- / :
1. FR-4 PCB 2
2. /

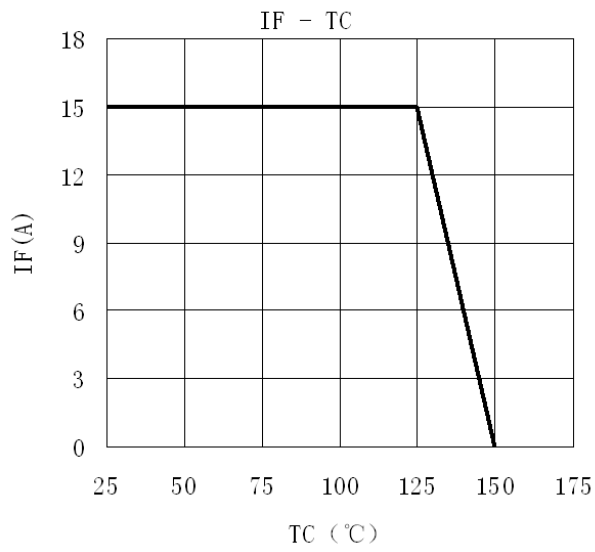

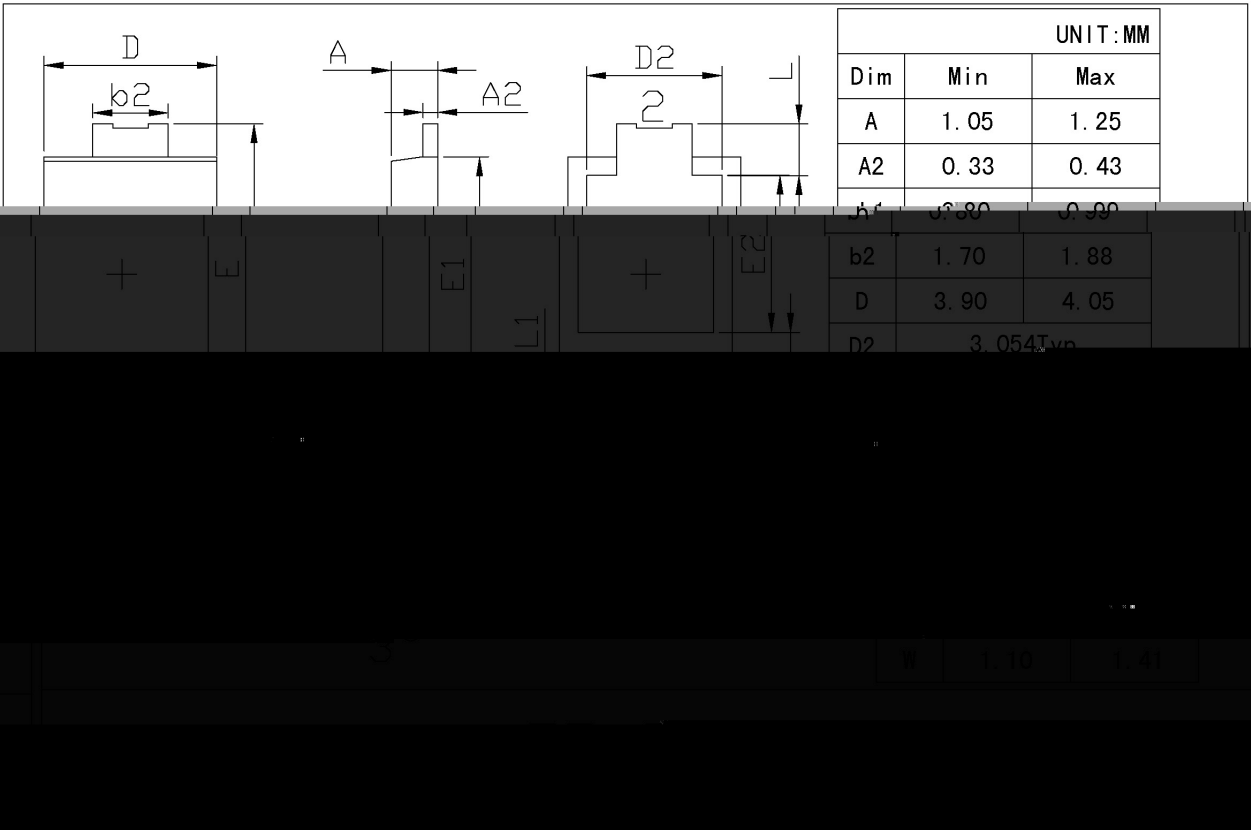

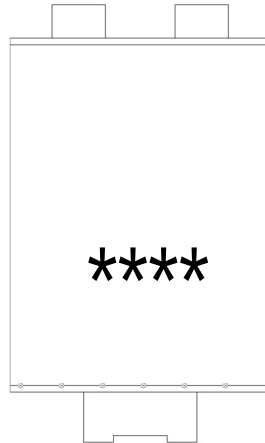


15T50

\*\*\*\*\*

15T50

Temperature Profile for IR Reflow Soldering(Pb-Free)

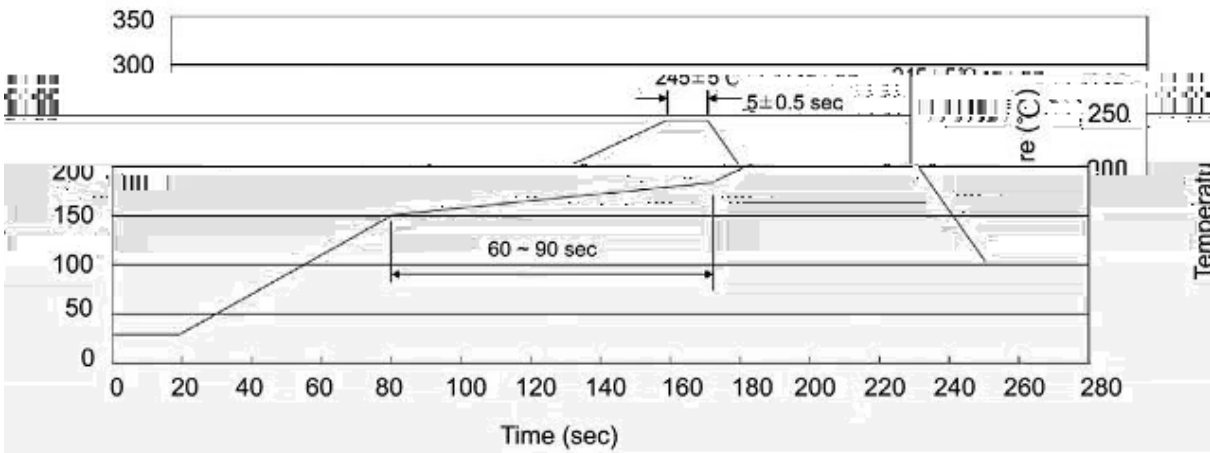

± ± ± ±

± ±

| 封装形式   | 包装数量               |                         |                        |                              |                        | 包装尺寸    |             |             |
|--------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---------|-------------|-------------|
|        | Units/Reel<br>只/卷盘 | Reels/Inner Box<br>卷盘/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Reel    | Inner Box 盒 | Outer Box 箱 |
| TO-277 | 5,000              | 3                       | 15,000                 | 6                            | 90,000                 | 13" ×12 | 360×360×50  | 380×335×366 |