

/ Descriptions

TO-220S



Schottky diode in a TO-220S Plastic Package.

/ Features

Low power loss, high efficiency.

/ Applications

For high frequency, high voltage, high current rectifier diode, freewheeling diode.

/ Equivalent Circuit**/ Pinning**

PIN1 Anode

PIN 2 Cathode

PIN 3 Anode

PIN 4 NC

/ h_{FE} Classifications & Marking



See Marking Instructions.

MBRJ10100CT

Rev.E Mar.-2016


Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage Reverse Voltage	V_{RRM} V_{RWM} V_{RM}	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	V
Average Rectified Forward Current	I		

/ **Electrical Characteristic Curve**

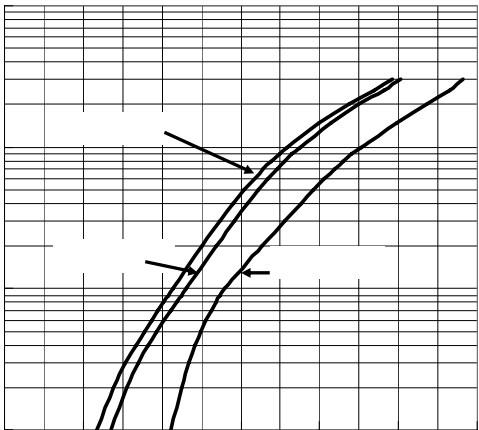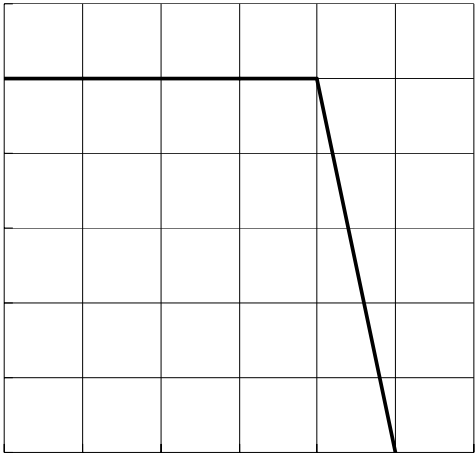


/ Package Dimensions

TO-220S Unit: mm

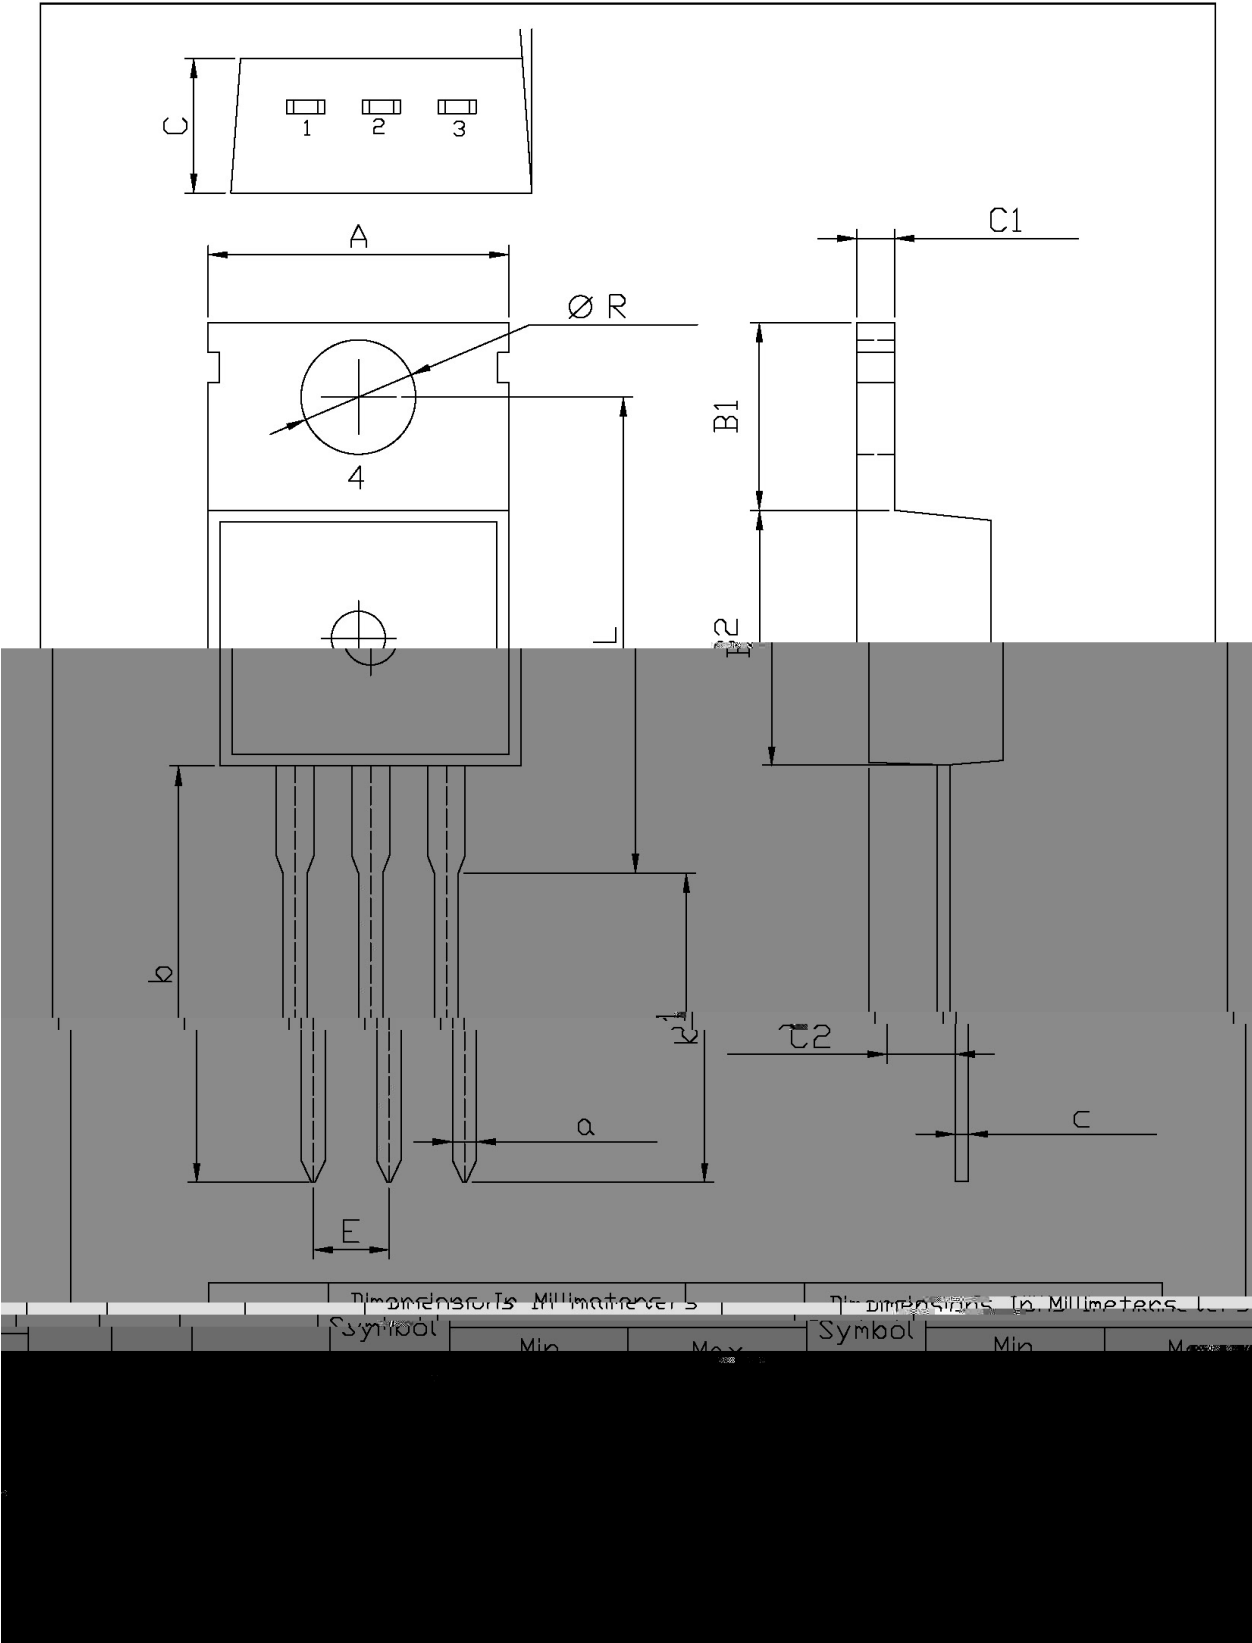

/ Marking Instructions

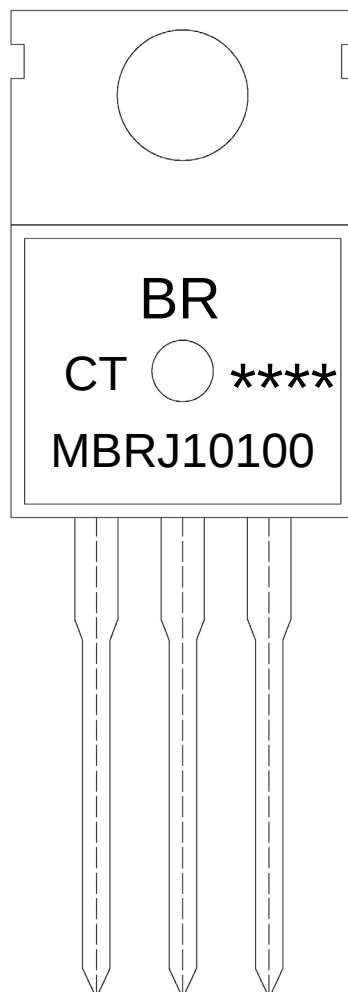

Note:


BR: Company Code

MBRJ10100 Product Type.

CT: Internal Structure

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

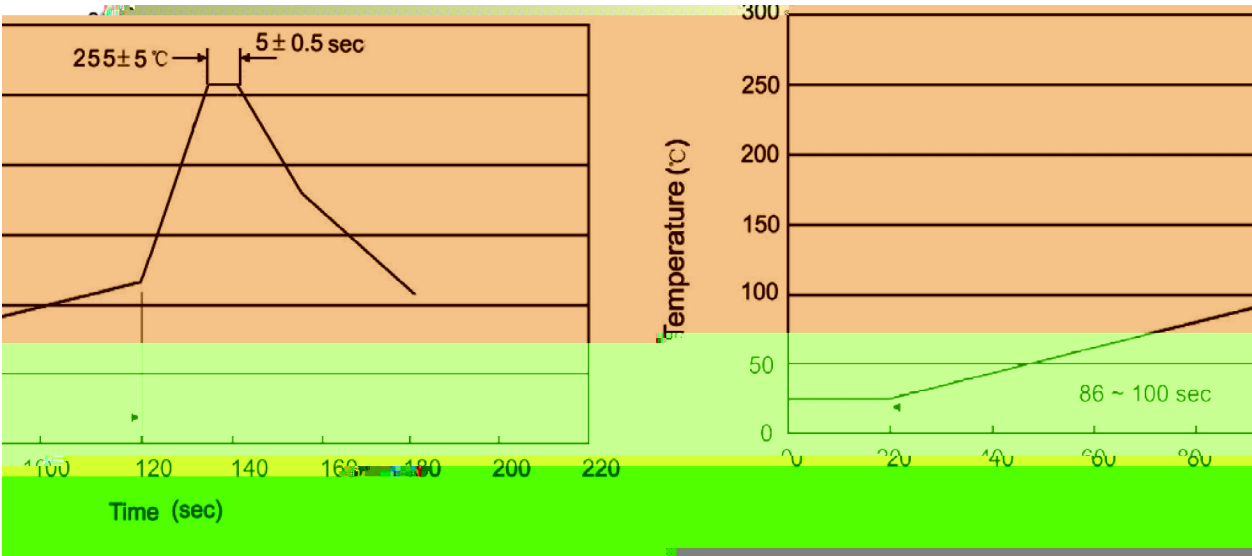

Note:

- 1

25 150

60 90sec;
- 2

255 5

5 0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255 5 , Duration:5 0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270 5 10 1 sec. Temp.:270±5℃ Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices