

/ Descriptions

TO-3P



Ultrafast Recovery Diode in a TO-3P Plastic Package.

/ Features

Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.

/ Applications

For high frequency, high voltage, high current rectifier diode, freewheeling diode

/ Equivalent Circuit**/ Pinning**

PIN1 Anode PIN2 Cathode PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions






	Unit
600	V
20	V
600	V
30	A
	A
	/W
60	

yp	Max	Unit


1.35

V


/ Electrical Characteristic Curve

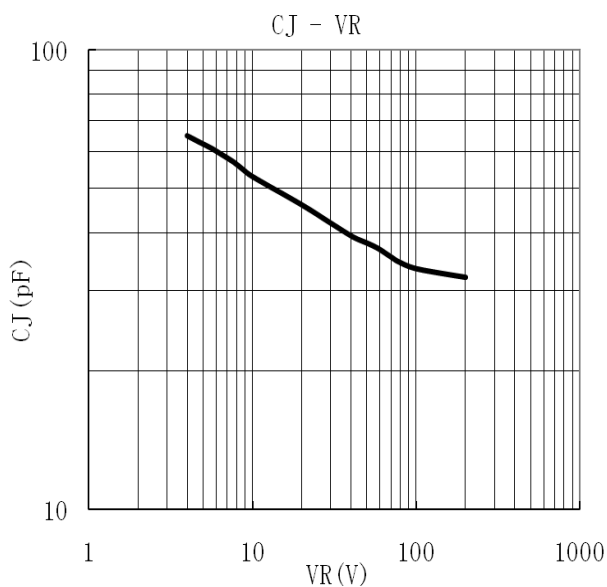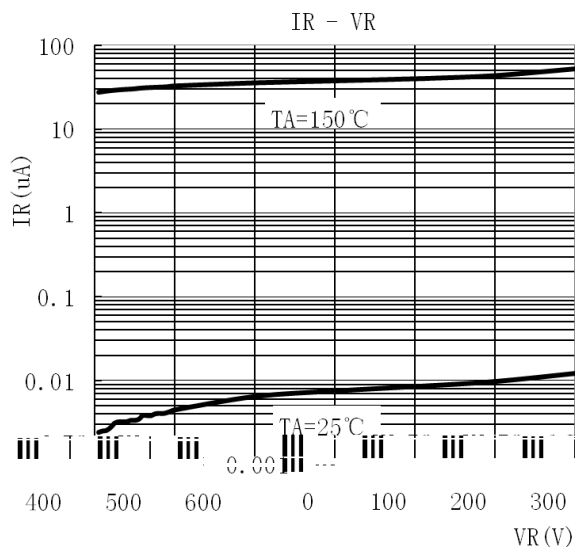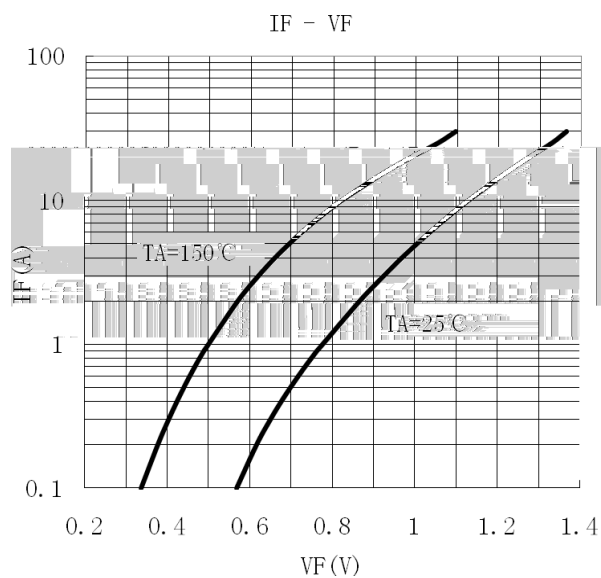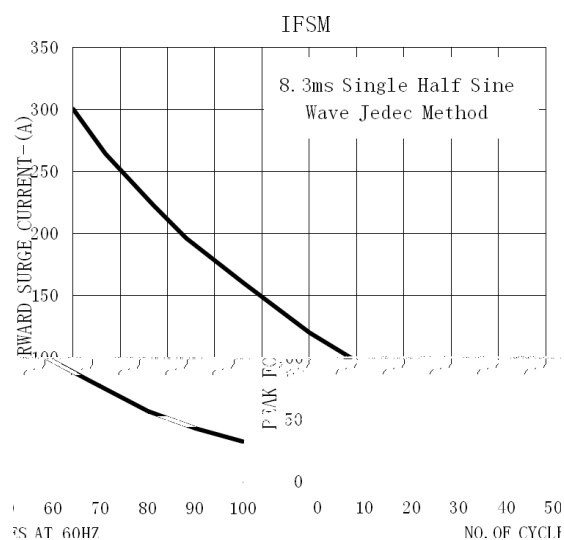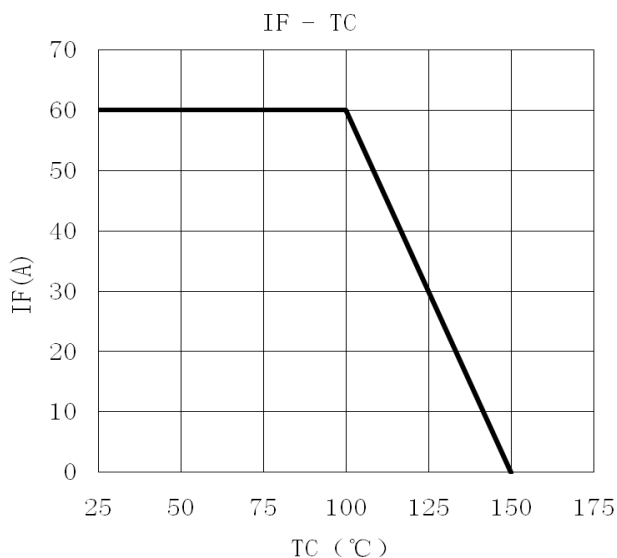

/ Package Dimensions

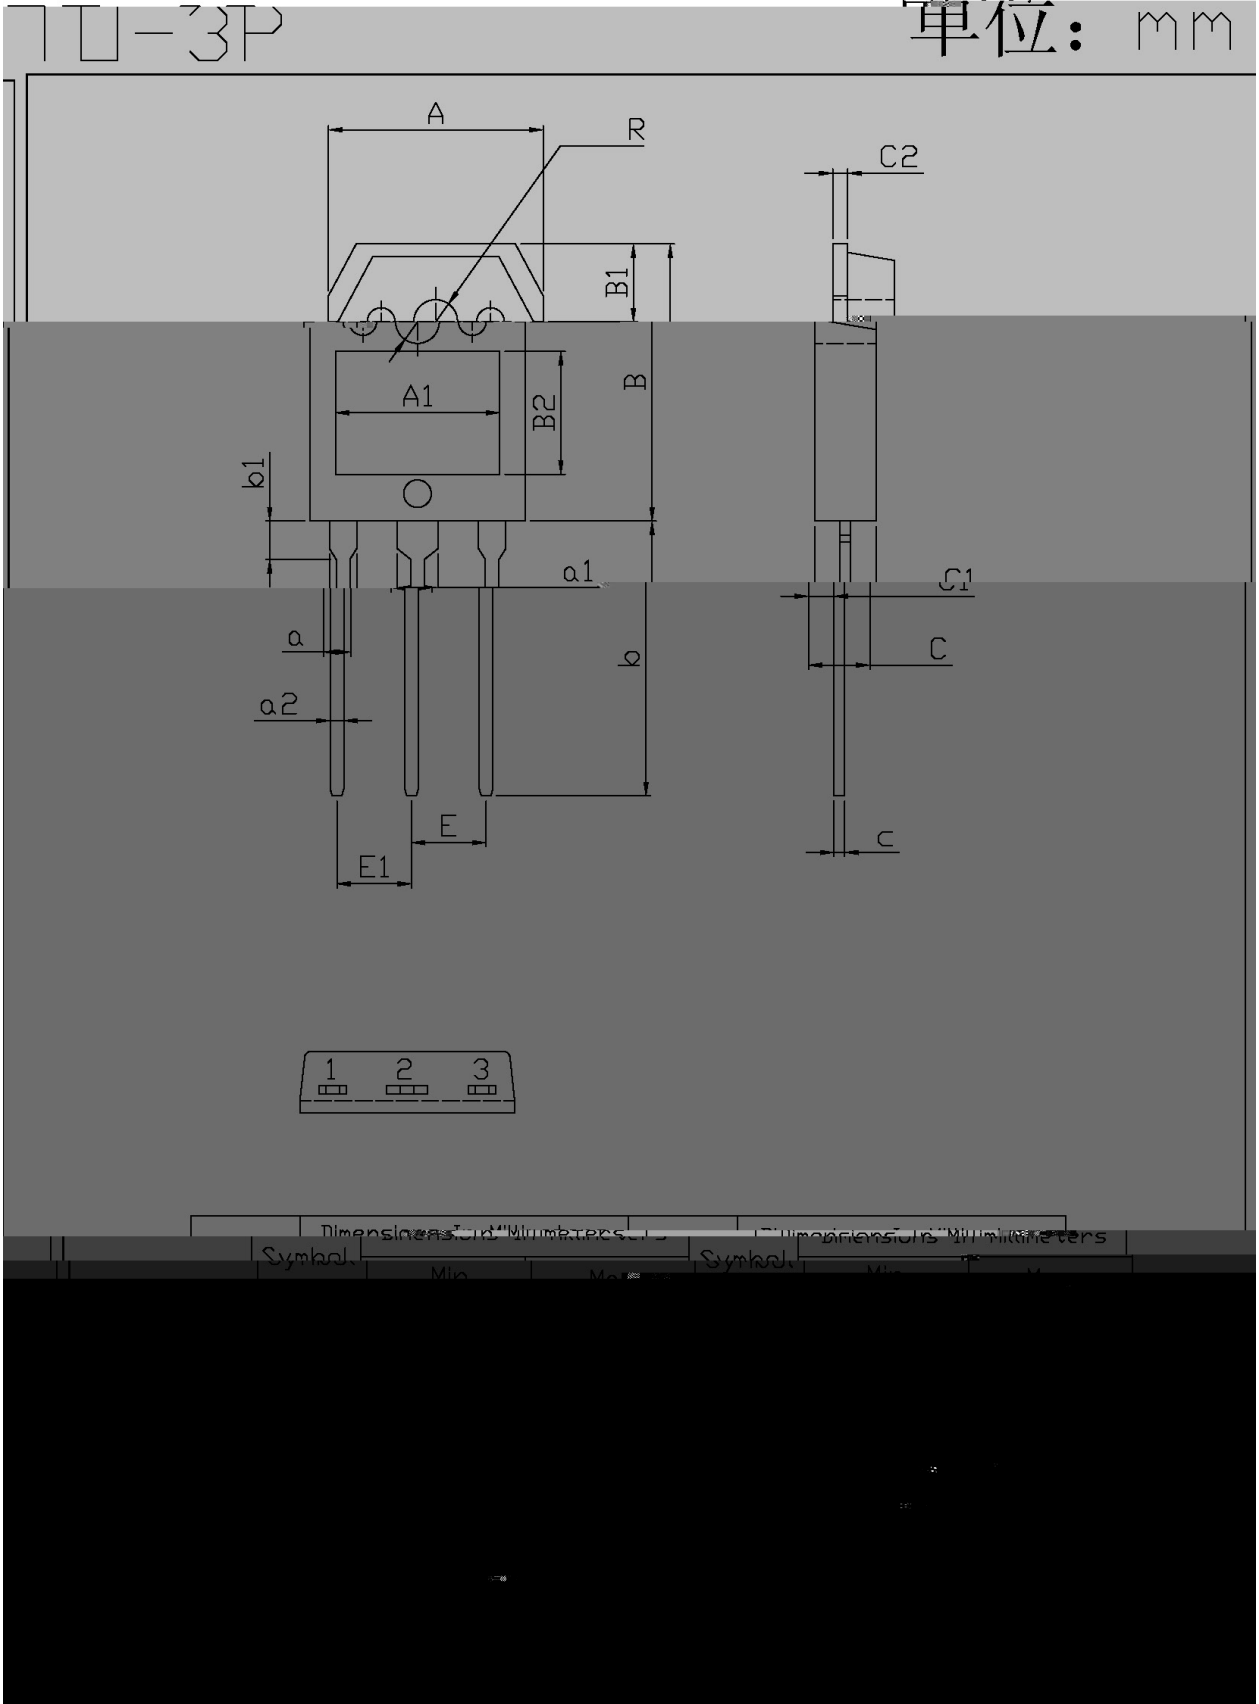

/ Marking Instructions

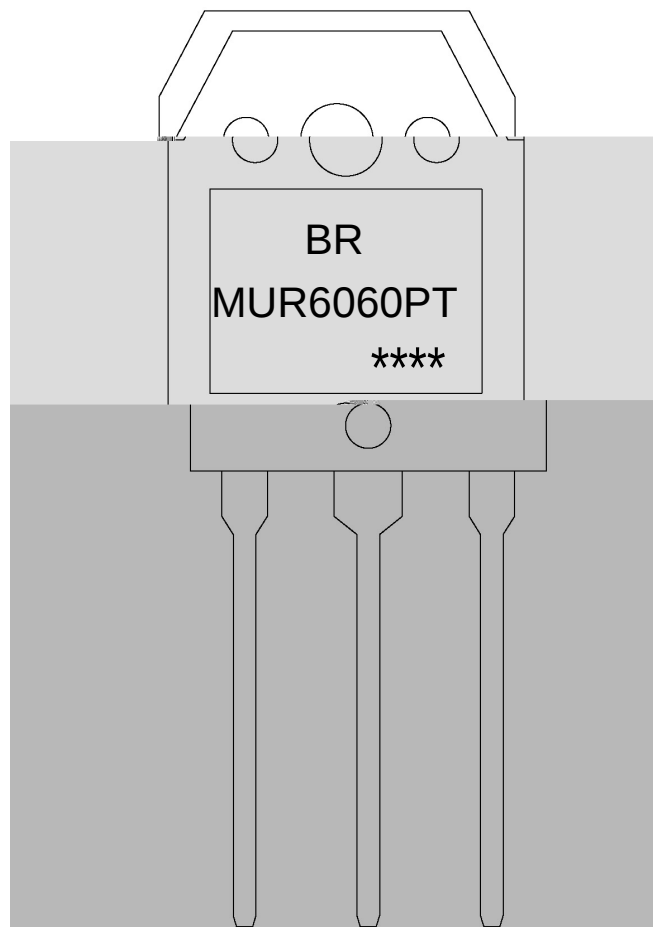

BR

MUR6060PT

Note:

BR:

Company Code


MUR6060PT

Product Type.

****:

Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

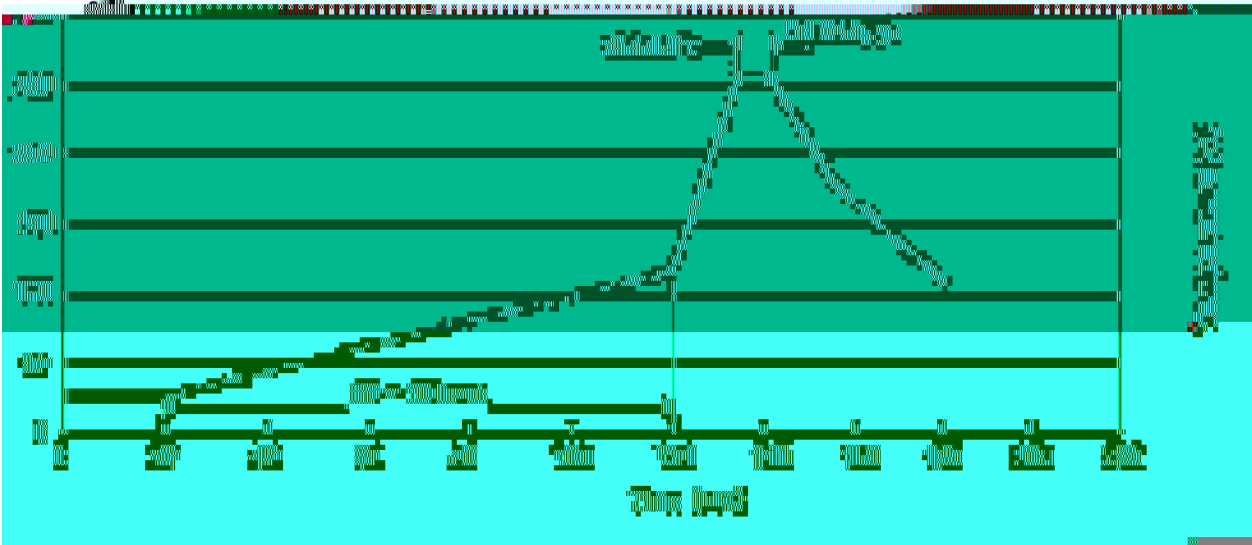

Note:

- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-3P	30	15	450	5	2250	497.5×46×8	555×164×50	575×290×180

/ Notices