



0





PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

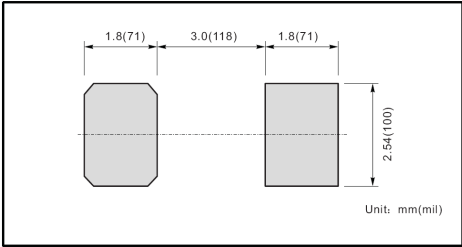


℃	()								
)									
)									℃
									℃

			数值	
		℃		μ
		℃		μ

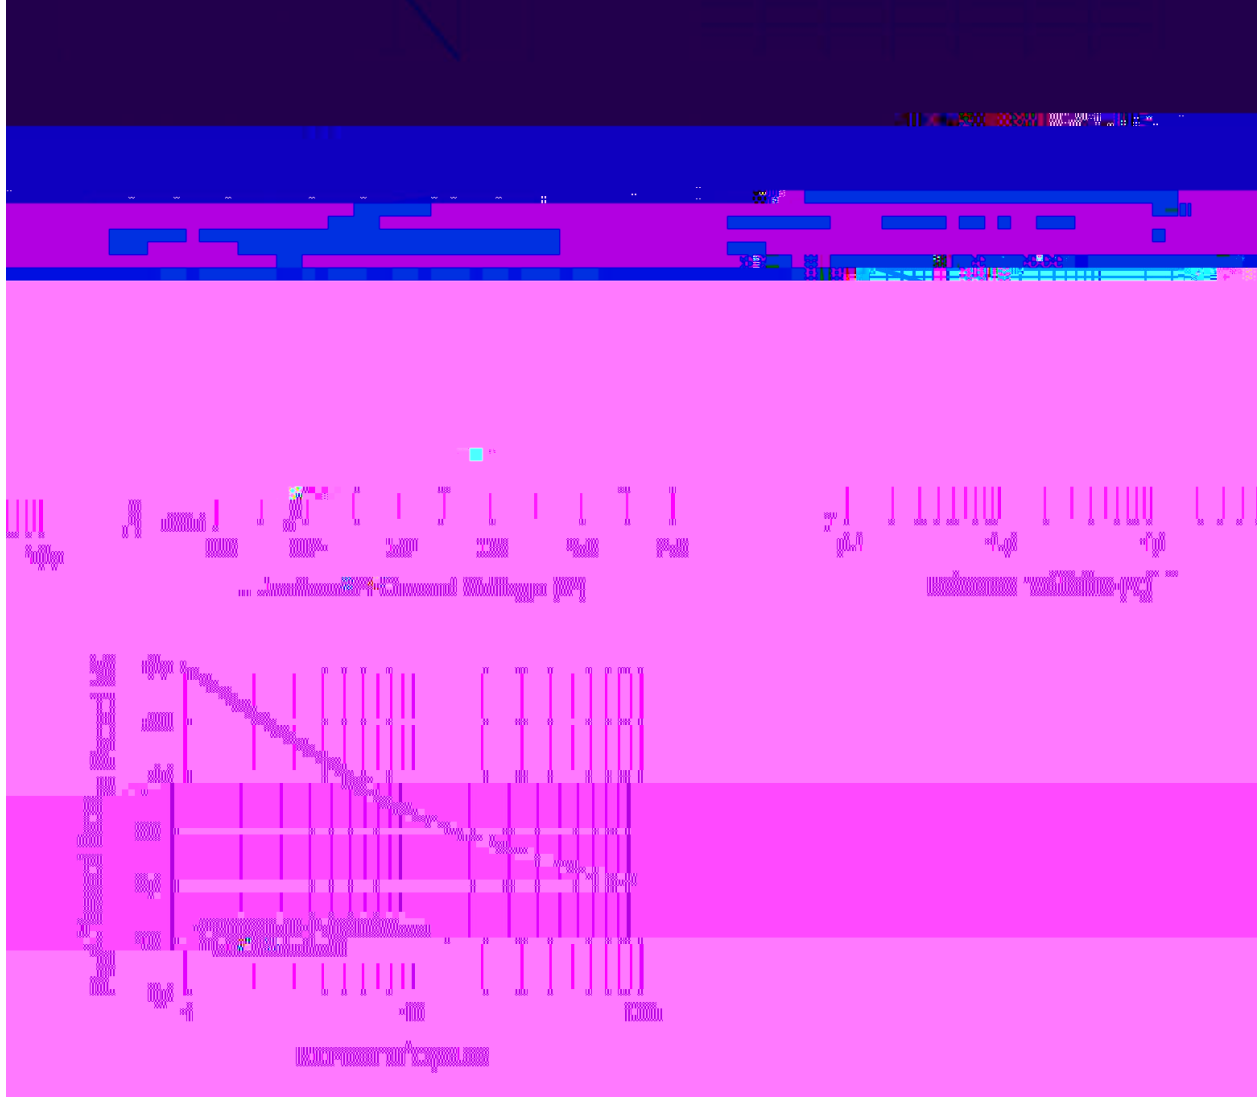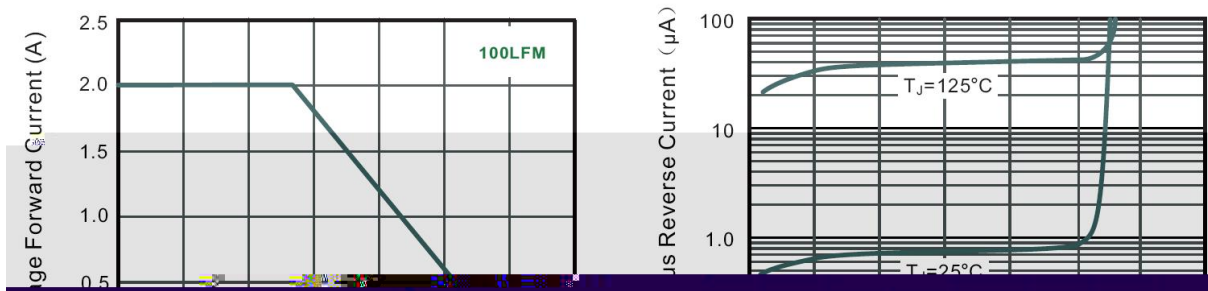


SMBDF

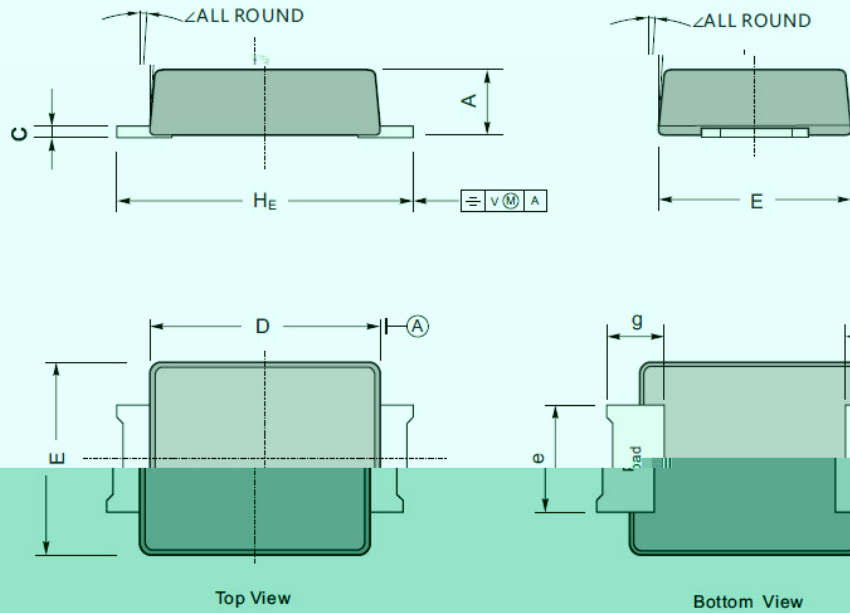

UNIT		A	C	D	E	H _E	e	g	∠	
max		1.3	0.26	4.4	3.7	5.5	2.2			
	mm	min	1.1	0.18	4.2	3.5	5.1	1.9	1.0	9°
		mil	max	51	10	173	146	216	86	
	min		43	7	165	138	200	75		

Marking

Type number		Marking code	
B		S2ABF...	S2A
B		S2BBF...	S2B
B		S2DBF...	S2D
B		S2GBF...	S2G
B		S2JBF...	S2J
B		S2KBF...	S2K
B		S2MBF...	S2M

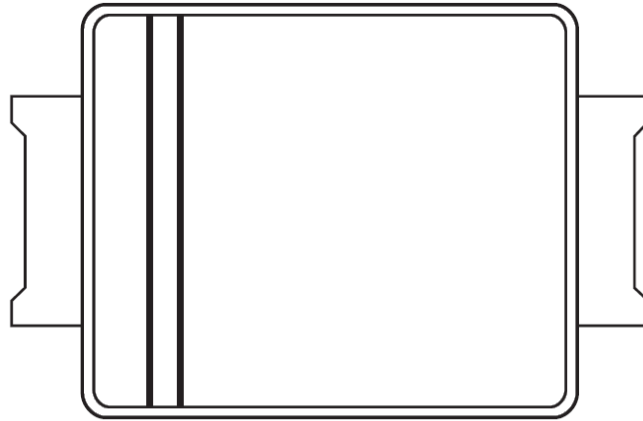

Temperature Profile for IR Reflow Soldering(Pb-Free)