


20V~200V


3.0A

:




| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

The recommended mounting pad size

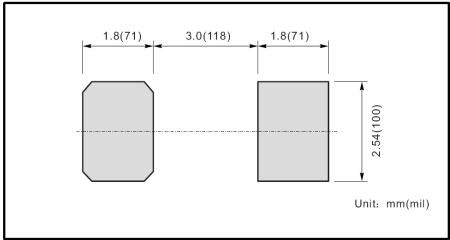


|   |     |  |  |  |  |  |  |  |  |  |
|---|-----|--|--|--|--|--|--|--|--|--|
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   | ( ) |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
| ) |     |  |  |  |  |  |  |  |  |  |
| ) |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |
|   |     |  |  |  |  |  |  |  |  |  |

|  |  |    |  |  |  |  |  |  |  |  |  |
|--|--|----|--|--|--|--|--|--|--|--|--|
|  |  |    |  |  |  |  |  |  |  |  |  |
|  |  |    |  |  |  |  |  |  |  |  |  |
|  |  |    |  |  |  |  |  |  |  |  |  |
|  |  | °C |  |  |  |  |  |  |  |  |  |
|  |  | °C |  |  |  |  |  |  |  |  |  |

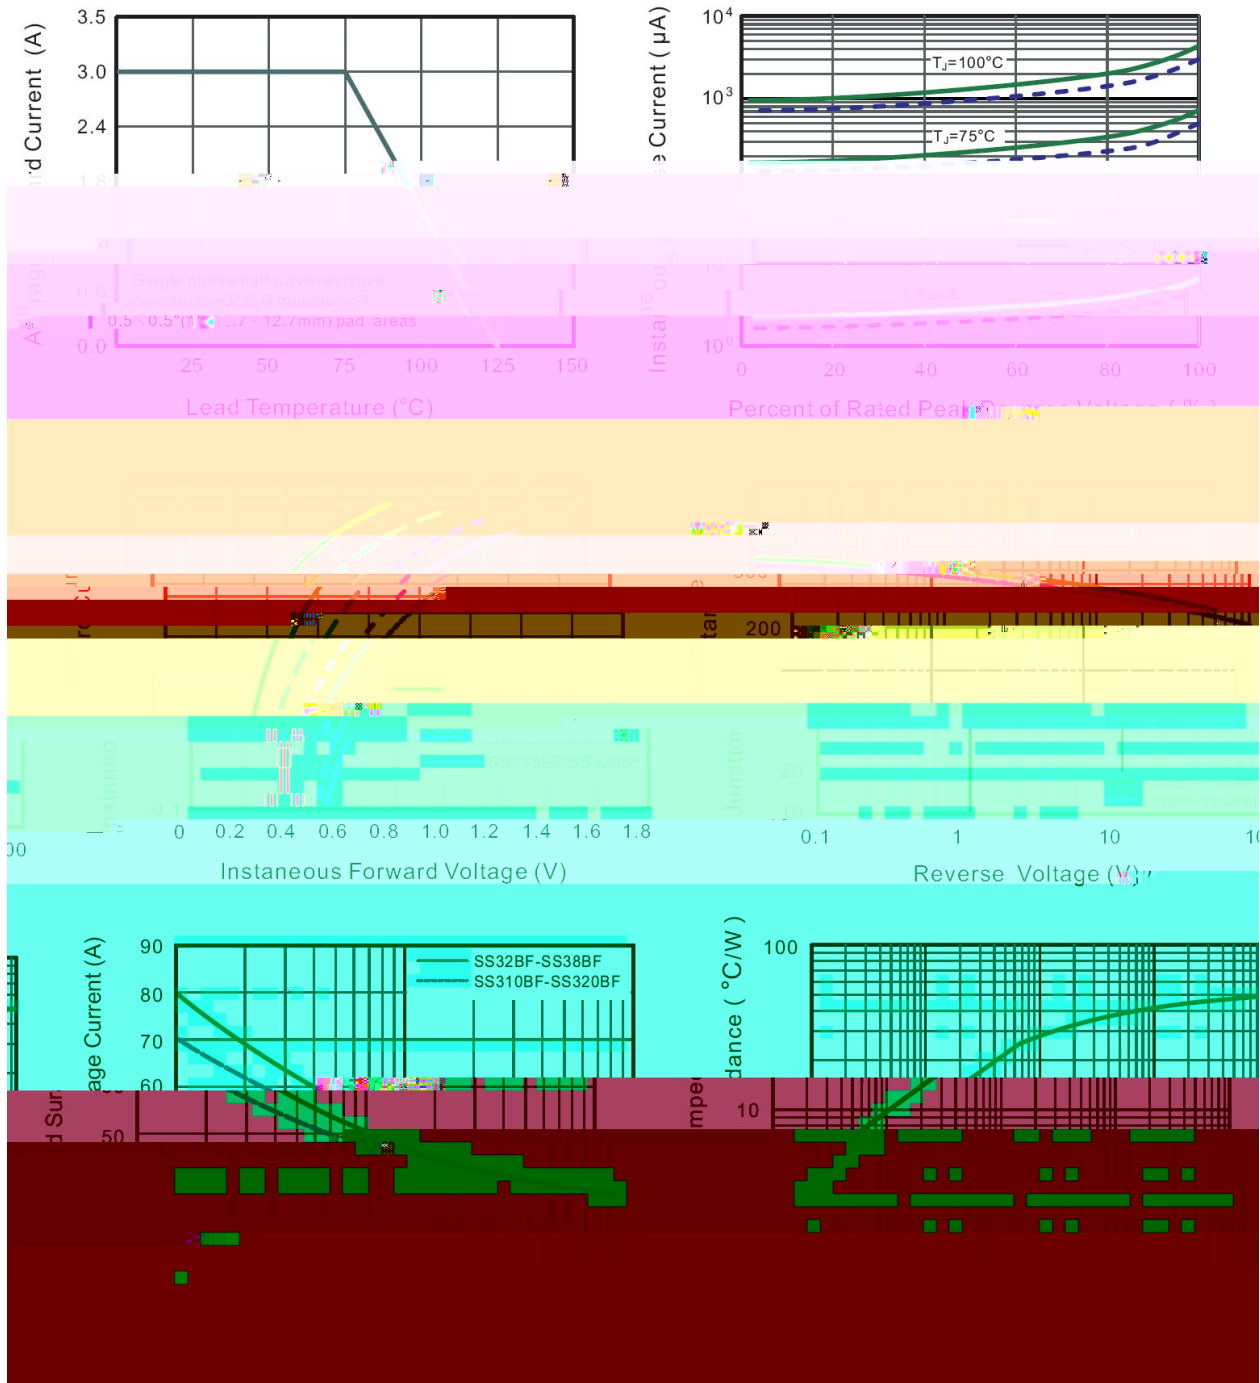



SMBT

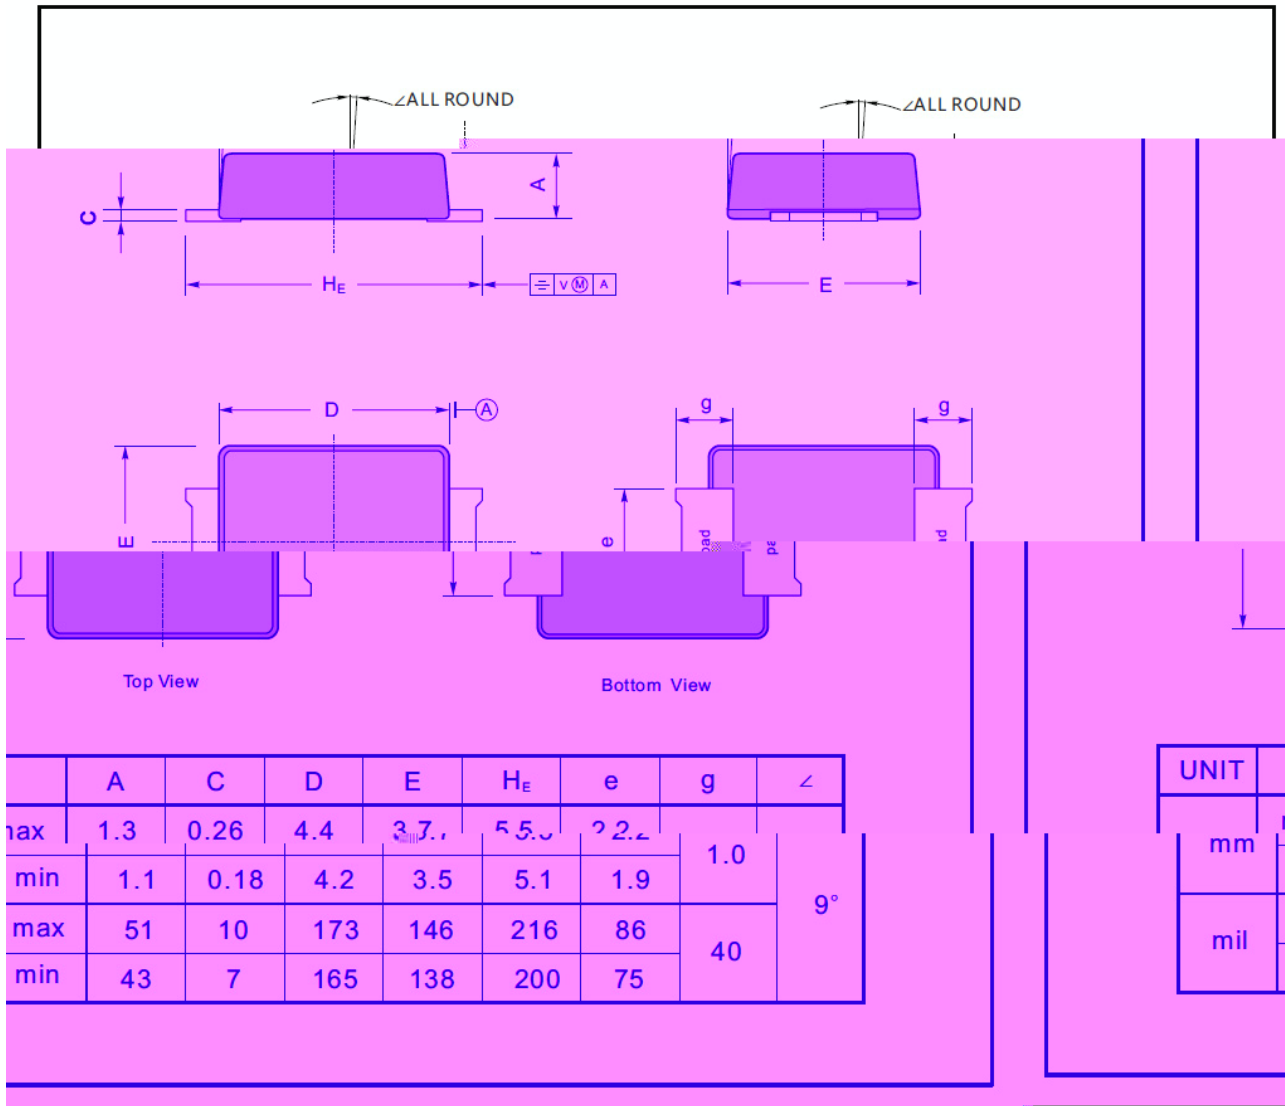

## Marking

| Type number | Marking code |
|-------------|--------------|
| SS32BF      | S32B         |
| SS34BF      | S34B         |
| SS36BF      | S36B         |
| SS38BF      | S38B         |
| SS310BF     | S310B        |
| SS312BF     | S312B        |
| SS315BF     | S315B        |
| SS320BF     | S320B        |

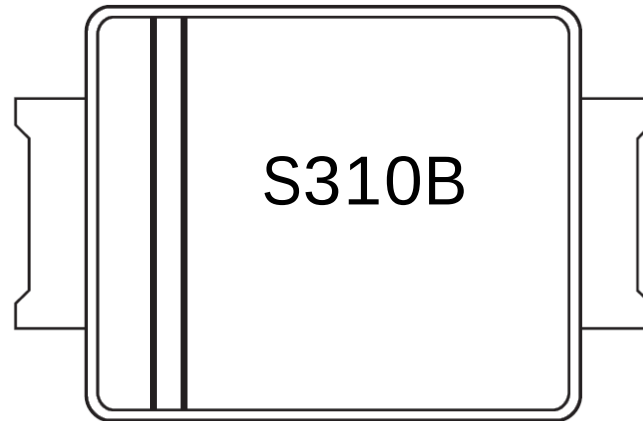

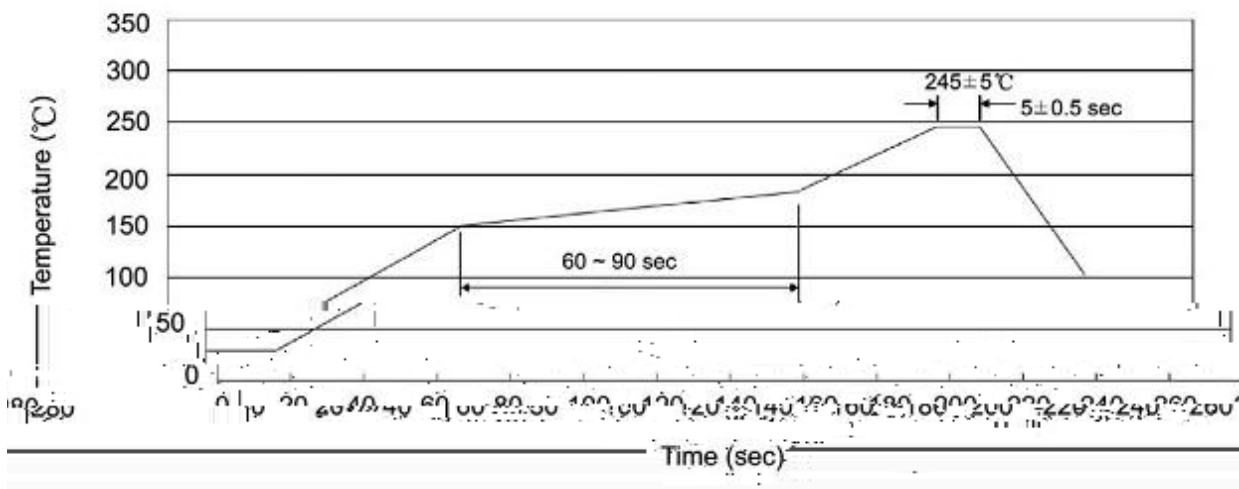

±

±

±

±

±

±

±

±

|  |  |  |  |  |  |   |  |  |
|--|--|--|--|--|--|---|--|--|
|  |  |  |  |  |  |   |  |  |
|  |  |  |  |  |  |   |  |  |
|  |  |  |  |  |  | " |  |  |