

# TB1S-15~TB10S-15

Rev.D May.-2017



DATA SHEET

1.5A

ABS/LBF

1.5A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.

Glass Passivated Chip Junction, Reverse Voltage :100 to 1000V,Forward Current: 1.5A,High Surge Current Capability, Designed for Surface Mount Application. Halogen free product.

General purpose.

/ Marking

# TB1S-15~TB10S-15


Rev.D May.-2017



DATA SHEET

| Parameter                               | Symbol    | Rating  |         |         |         |         |          | Unit |
|-----------------------------------------|-----------|---------|---------|---------|---------|---------|----------|------|
|                                         |           | TB1S-15 | TB2S-15 | TB4S-15 | TB6S-15 | TB8S-15 | TB10S-15 |      |
| Maximum Repetitive Peak Reverse Voltage | $V_{RRM}$ |         |         |         |         |         |          |      |

/ Electrical Characteristic Curve

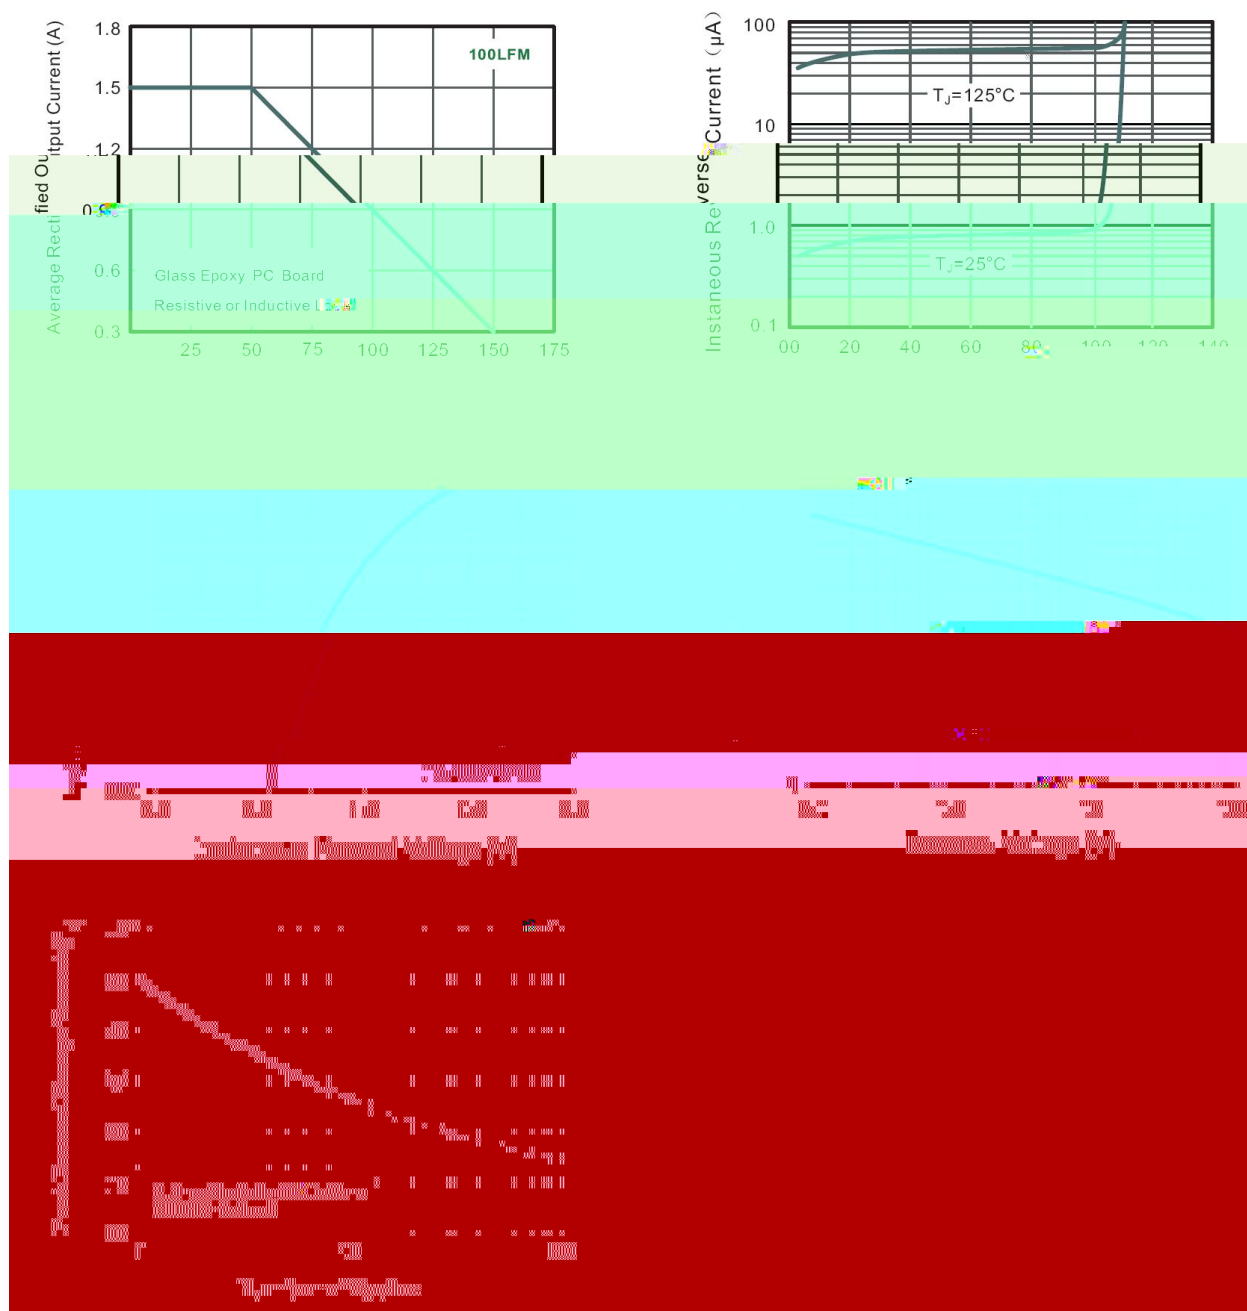

/ Package Dimensions


ABS/LBF



/ Marking Instructions

Marking

| Type number | Marking code |
|-------------|--------------|
| TB1S-15     | 15T1         |
| TB2S-15     | 15T2         |
| TB4S-15     | 15T4         |

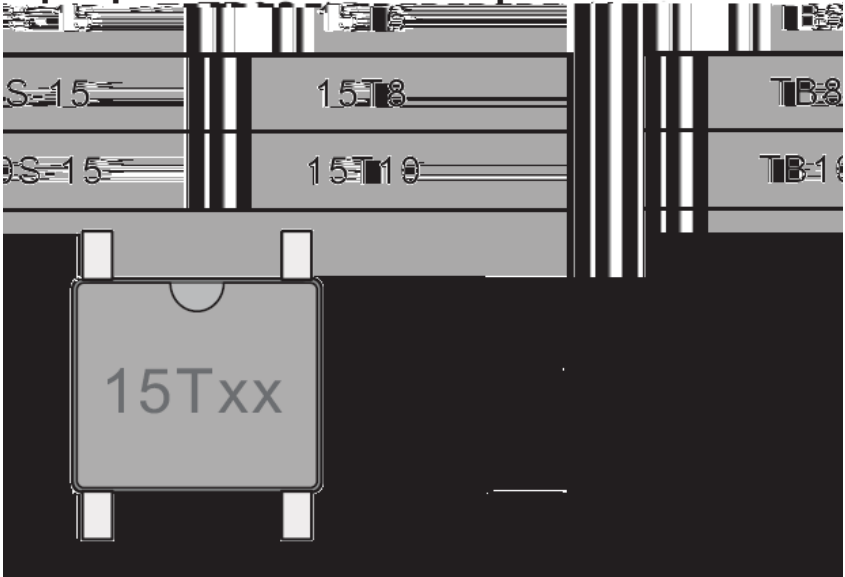



(   ) /

