

[illegible]



/ Descriptions

TO-92

/ Features

1.240V	0.5%	1%	100uA	100mA
$V_O = V_{ref}$	20V	(:55μA)	(:0.05Ω)	
~			~	

/ Applications

/ Equivalent Circuit



/ Pinning











/ Marking





& Test circuits&Typical Application

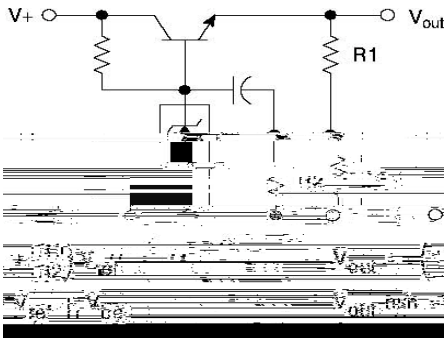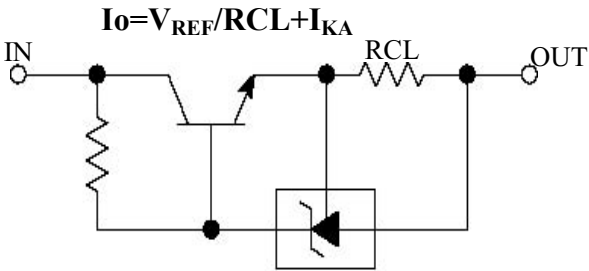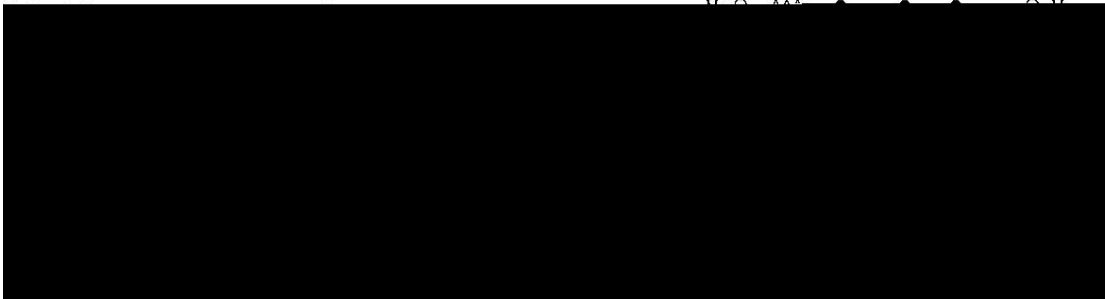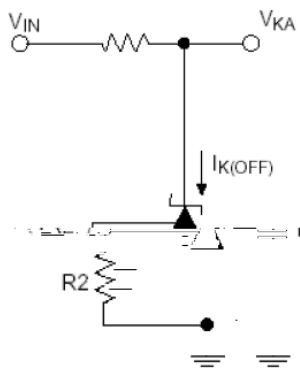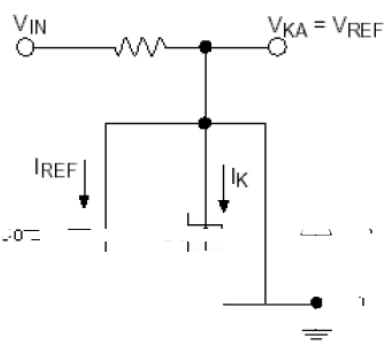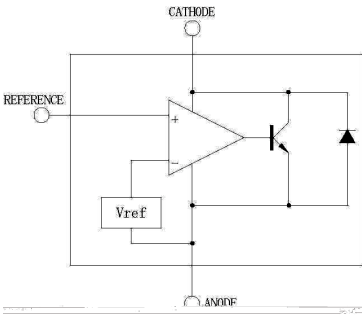



/ Electrical Characteristic Curve


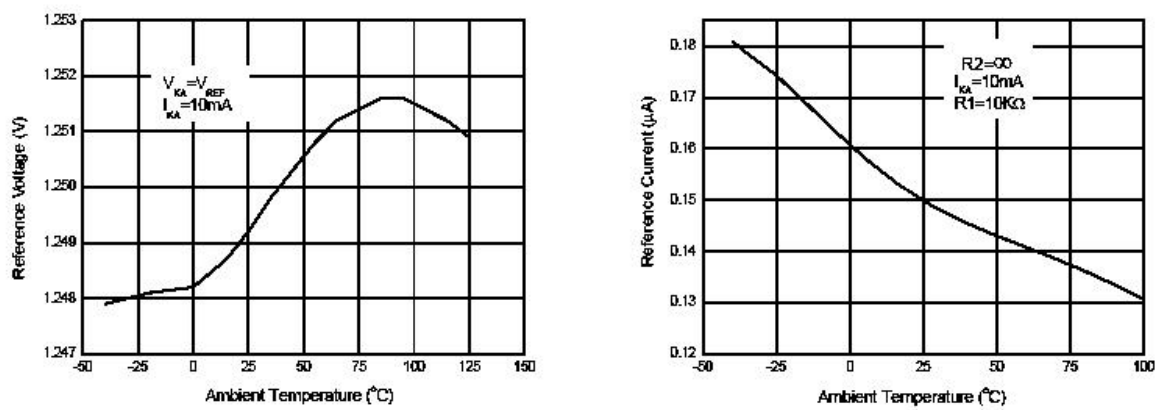



Figure 7. Reference Voltage vs. Ambient Temperature



/ Package Dimensions

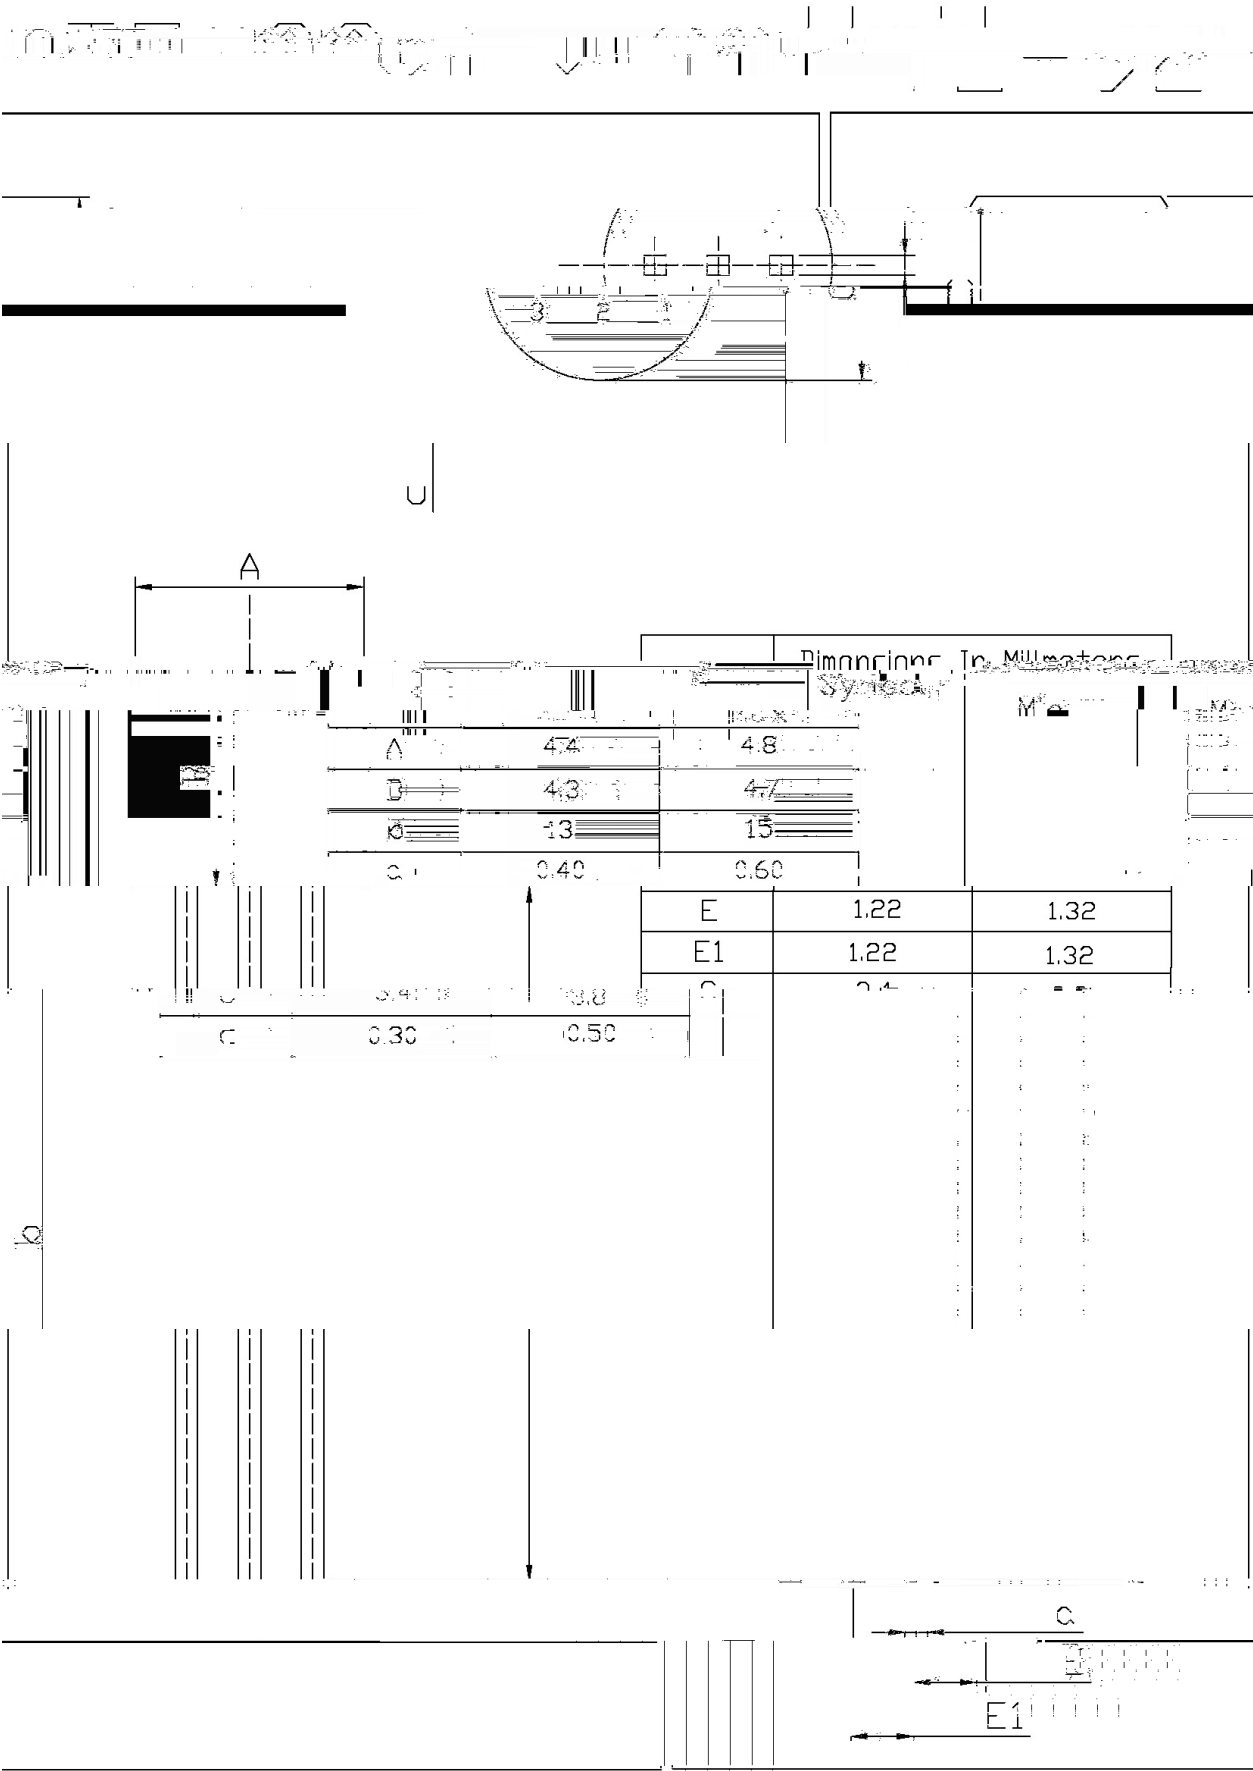

/ Marking Instructions

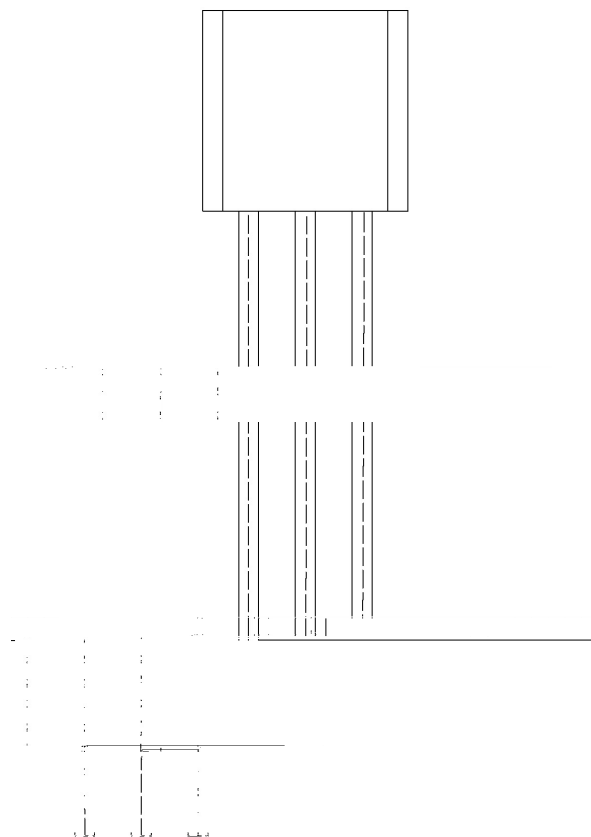

说明：

： 为公司代码


： 为产品型号

为 分档代码

****： 为生产批号代码，随生产批号变化。



() / Temperature Profile for Dip Soldering(Pb-Free)

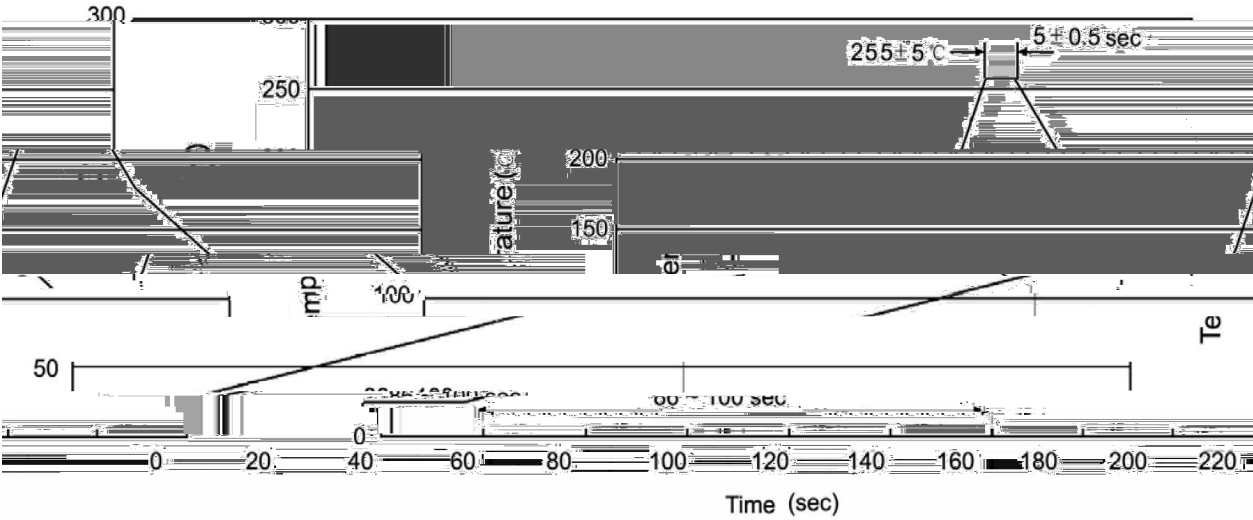

± °C ± °C ± °C ± °C

/ Resistance to Soldering Heat Test Conditions

± °C ± °C °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
						袋	盒	箱

封装形式	包装数量					包装尺寸 :		
						盒	箱	
							小箱	大箱

/ Notices